

# CAMSO SKS 532



SKID STEER  
LOADERS



## EXCEPTIONAL DURABILITY, TRACTION AND VALUE

A premium soft surface skid steer tire solution. Deep traction tread with protective features to provide durability in softer conditions.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



**ROAD  
FREE  
COMPANY**

CAMSO SKS 532



ENHANCED TREAD DEPTH WITH CURVED LUG DESIGN

- Ensures great durability and improved traction

STEPPED TREAD DESIGN

- Enhances cleanout for improved off-road traction



IMPACT GUARD WITH ENHANCED RIM PROTECTION

- Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires


VOID GUARD

- Enhances tread impact protection to reduce risk of punctures

| TIRE SIZE           | PR | RIM SIZE                                                             | ACTUAL TIRE DIMENSIONS |           |                            |          |         | MAXIMUM INFLATION PRESSURE [PSI] | MAXIMUM TIRE LOAD [lb] |       |        |        |
|---------------------|----|----------------------------------------------------------------------|------------------------|-----------|----------------------------|----------|---------|----------------------------------|------------------------|-------|--------|--------|
|                     |    |                                                                      | O.D. [in]              | O.W. [in] | O.T.D. [32 <sup>nd</sup> ] | SLR [in] | RC [in] |                                  | Static                 | 5 mph | 10 mph | 20 mph |
| 5.70 - 12 NHS       | 4  | 5JAx12;<br>4.50-I-70; 4.50-I-90                                      | 22.3                   | 6.1       | 16                         | 10.6     | 67.3    | 60                               | 2290                   | 1450  | 1145   | 985    |
| 23 X 8.50 - 12 SS   | 6  | 7JAx12;<br>7.00-I-70; 7.00-I-90                                      | 22.6                   | 8.6       | 16                         | 10.5     | 68.3    | 50                               | 2860                   | 1810  | 1430   | 1230   |
| 23 X 8.50 - 12 SS   | 12 | 7.00-I-70; 7.00-I-90; 7JA                                            | 22.5                   | 8.6       | 16                         | 10.5     | 67.9    | 100                              | 4360                   | 2760  | 2180   | 1875   |
| 26 X 12.00 - 12 SS  | 10 | 10.5x12; 10.50-I-70;<br>10.50-I-90; 8.50-I-70;<br>8.50-I-90; 8 1/2JA | 25.5                   | 12.0      | 25                         | 11.7     | 76.9    | 65                               | 5575                   | 3530  | 2790   | 2400   |
| 27 X 8.50 - 15 NHS  | 8  | 7JAx15                                                               | 26.7                   | 8.7       | 18                         | 12.4     | 80.9    | 60                               | 4825                   | 2875  | 2400   | 2040   |
| 31 X 15.50 - 15 NHS | 8  | 13LBx15                                                              | 31.0                   | 15.6      | 29                         | 14.4     | 93.6    | 45                               | 7315                   | 4360  | 3645   | 3090   |
| 10-16.5 NHS         | 10 | 8.25                                                                 | 30.2                   | 10.9      | 23                         | 14.0     | 91.2    | 75                               | 7440                   | 4710  | 3720   | 3205   |
| 12-16.5 NHS         | 12 | 9.75                                                                 | 32.7                   | 13.0      | 24                         | 15.1     | 98.9    | 80                               | 9985                   | 6320  | 4995   | 4300   |
| 12-16.5 NHS         | 14 | 9.75                                                                 | 32.7                   | 13.1      | 24                         | 15.0     | 101.0   | 90                               | 10710                  | 6780  | 5355   | 4610   |
| 14-17.5 NHS         | 14 | 10.50                                                                | 36.4                   | 13.8      | 30                         | 16.7     | 109.8   | 80                               | 13495                  | 8540  | 6745   | 5805   |

All tires listed are tubeless.  
Void Guard design may vary depending on tire size.

PERFORMANCE COMPARISON

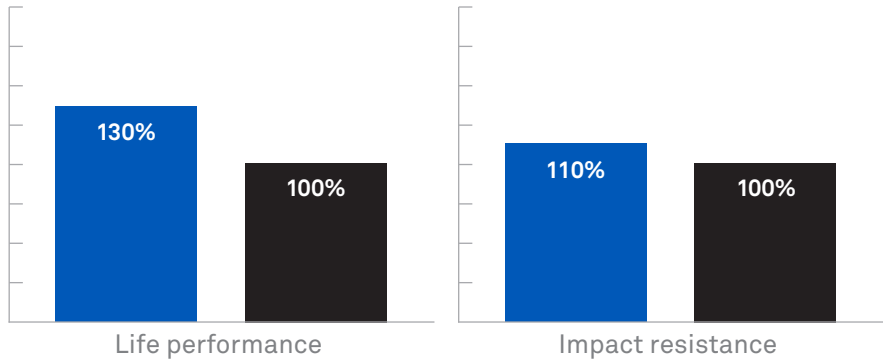

- CAMSO SKS 532
- XTRA WALL

With a new premium compound and a tread depth increase, Camso SKS 532 shows 30% better life performance compared to Xtra Wall in controlled conditions. With high lug to void ratio and the added protection of the new Void Guard feature, SKS 532 demonstrated 10% better tread impact protection.

AUTHORIZED DISTRIBUTOR:

camso.co

