

CAMSO WHL 753R

FORMERLY SOLIDEAL SRGP



WHEEL
LOADERS



MOTOR
GRADERS



ARTICULATED
DUMP TRUCKS



RADIAL PERFORMANCE, VERSATILITY AND DURABILITY

Delivers excellent performance, versatility and durability. With enhanced stability, ride quality and traction, it's the best choice for both one-star and two-star applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO WHL 753R



HEAVY-DUTY DUAL-STAR CARCASS

- Enhances stability and suitability for both one-star and two-star applications

OFFSET, TAPERED TREAD LUGS

- Reduces vibration for improved ride quality



OPTIMIZED TREAD PATTERN

- Provides excellent durability and low wear rate


NON-DIRECTIONAL STEPPED DESIGN

- Enhances cleanout for improved traction

TIRE SIZE	TYPE	RIM SIZE	TIRE DIMENSIONS			APPLI-CATION	SI	LI	INFLATION PRESSURE [KPa] [PSI] AND LOAD CAPACITY [kg] [lb]										
			O.D. [mm] [in]	O.W [mm] [in]	O.T.D [mm] [32nd]				KPa	200	250	300	350	400	450	500	550	600	650
			PSI	29	36				44	51	58	65	73	80	87	94			
17.5R25	TBLS	14.00/1.5	1348	469	28	Loader*	A2	182	kg	3650	4250	4850	5600	6000	6500	7100	7500	8000	8500
						lb	8050	9350	10700	12300	13200	14300	15700	16500	17600	18700			
			53.1	18.5	35	EM**	B	167	kg	-	-	3550	4000	4375	4750	5150	-	-	-
						lb	-	-	7850	8800	9650	10500	11400	-	-	-			
			Grader*	A8	153	kg	2650	3075	3650	-	-	-	-	-	-	-	-	-	
						lb	5840	6800	8050	-	-	-	-	-	-	-	-		
20.5R25	TBLS	17.00/2.0	1483	528	31	Loader*	A2	193	kg	4750	5600	6300	7100	8000	8750	9500	10000	10900	11500
						lb	10500	12300	13900	15700	17600	19300	20900	22000	24000	25400			
			58.4	20.8	39	EM**	B	177	kg	-	-	4750	5300	5800	6500	6900	-	-	-
						lb	-	-	10500	11700	12800	14300	15200	-	-	-			
			Grader*	A8	161	kg	3450	4125	4625	-	-	-	-	-	-	-	-		
						lb	7600	9100	10200	-	-	-	-	-	-	-			
23.5R25	TBLS	19.50/2.5	1614	623	35	Loader*	A2	201	kg	6000	7100	8250	9250	10300	11200	12150	12850	13600	14500
						lb	13200	15700	18200	20400	22700	24700	26800	28300	30000	32000			
			63.5	24.5	44	EM**	B	185	kg	-	-	6000	6700	7500	8250	9000	-	-	-
						lb	-	-	13200	14800	16500	18200	19800	-	-	-			
			Grader*	A8	170	kg	4500	5300	6000	-	-	-	-	-	-	-			
						lb	9900	11700	13200	-	-	-	-	-	-	-			
26.5R25	TBLS	22.00/3.0	1746	704	38	Loader*	A2	209	kg	7500	9000	10300	11500	12850	14000	15000	16000	17000	18500
						lb	16500	19800	22700	25400	28300	30900	33100	35300	37500	40800			
			68.7	27.7	48	EM**	B	193	kg	-	-	7500	8500	9500	10300	11200	-	-	-
						lb	-	-	16500	18700	20900	22700	24700	-	-	-			
			Grader*	A8	178	kg	5600	6700	7500	-	-	-	-	-	-				
						lb	12300	14800	16500	-	-	-	-	-	-	-			
29.5R25	TBLS	25.00/3.5	1870	782	40	Loader*	A2	216	kg	-	-	-	-	15500	17000	18000	19500	20600	22400
						lb	-	-	-	-	34200	37500	39700	43000	45400	49400			
			73.6	30.8	50	EM**	B	200	kg	-	-	9250	10300	11500	12500	13600	-	-	-
						lb	-	-	20400	22700	25400	27600	30000	-	-	-			
			Grader*	A8	187	kg	7100	8500	9750	-	-	-	-	-	-				
						lb	15700	18700	21500	-	-	-	-	-	-	-			


NEW TIRE

Lug-to-void: 55%

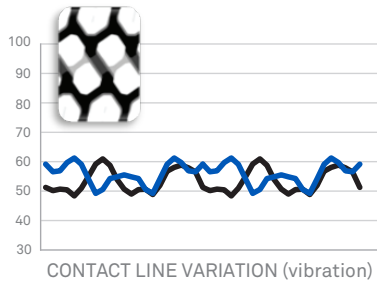

25% WORN TIRE

Lug-to-void: 65%

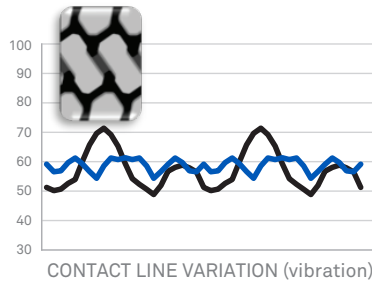

CAMSO WHL 753R

COMPETITOR 1

Patented tread design to minimize vibrations: Poor ride quality caused by high vibration when operating on hard surfaces can affect operator comfort and overall machine performance. The Camso WHL 753R provides **improved ride quality** throughout its tread life.

AUTHORIZED DISTRIBUTOR:

camso.co

