

# PRODUCT CATALOG CONSTRUCTION TIRES AND TRACKS





# TABLE OF CONTENTS

| PRODUCT NAMING SYSTEM   CONSTRUCTION TIRES _ | 4          | TIRES FOR SPECIALTY APPLICATIONS     |    |
|--|------------|--------------------------------------|----|
|  | _          | CAMSO CMP 533                        |    |
| NAMING REFERENCE GUIDE   CONSTRUCTION TIRES  | 5          | CAMSO CMP 576                        |    |
| TIRE COMPLETE LINE OVERVIEW                  | 6          | NEW CAMSO AWP 583S                   | 39 |
| TIRE COMPLETE LINE OVERVIEW                  | 0          |                                      |    |
| CONSTRUCTION TIRES COMPACT LINE              | 8          | CONSTRUCTION TIRES INFRASTRUCTURE    | 40 |
| TIRES FOR SKID STEER LOADERS                 | 9          | TIRES FOR WHEEL LOADERS, ARTICULATED |    |
| CAMSO SKS 732                                |            | DUMPTRUCKS AND MOTOR GRADERS         |    |
| CAMSO SKS 532                                |            | CAMSO WHL 753R                       |    |
| CAMSO SKS 332                                |            | NEW CAMSO WHL 553R                   |    |
| CAMSO SKS 753                                |            | CAMSO WHL 775R                       |    |
| CAMSO HAULER SKZ                             |            | CAMSO WHL 776R                       |    |
| CAMSO SKS 775                                |            | CAMSO EMT 538R                       |    |
| CAMSO SKS 511                                |            | CAMSO EMT 553R                       |    |
| CAMSO SKS 792S                               |            | CAMSO GRD 533R                       |    |
| CAMSO SKS 7925                               |            | CAMSO GRD 732                        |    |
| CAMSO SKS 783S                               |            | CAMSO LM L2                          | 49 |
|  |            | CAMSO LM L3                          | 49 |
| CAMSO SKS 796S                               |            | CAMS0 WHL 775                        | 51 |
| CAMSO SKS 786S                               | _ 16       | CAMS0 WHL 773                        | 51 |
| TIRES FOR BACKHOE LOADERS                    | 17         | CAMSO MST 776                        |    |
| CAMCO DUL 722                                | _ 17<br>18 | SOLIDEAL HAULER LT                   | 52 |
| CAMSO BHL 732                                | 10         | SOLIDEAL RES 550 MAGNUM SERIES       |    |
| CAMSO BHL 532                                |            |                                      |    |
| CAMSO SL R4                                  |            | CONSTRUCTION TRACKS                  | 53 |
| CAMSO BHL 753                                |            |                                      |    |
| CAMSO BHL 530                                | 20         | THE CAMSO DIFFERENCE                 |    |
| TIRES FOR TELEHANDLERS                       | 21         | TRACK COMPLETE LINE OVERVIEW         |    |
| NEW CAMSO TLH 732+                           |            | TREAD PATTERNS                       |    |
|  |            | CAMSO CTL HXD                        |    |
| CAMSO TLH 532                                |            | CAMSO CTL SD                         | 60 |
| CAMSO TLH 753                                |            | CAMSO CTL SPROCKET                   | 61 |
| CAMSO TLH 792S                               |            | CAMSO MTL HXD                        | 61 |
| NEW CAMSO TLH 592S                           | 26         | NEW CAMSO STEEL OTT                  |    |
| TIRES FOR COMPACT WHEEL LOADERS,             |            | CAMSO RUBBER OTT                     |    |
| MINI-DUMPERS AND COMPACT TELEHANDLERS        | 27         | CAMSO EXC HXD PADS                   |    |
| CAMSO MPT 732                                |            | CAMSO MEX HXD                        |    |
|  |            |                                      | 67 |
| CAMCO MPT 753                                |            | CAMSO CARRIER HXD                    |    |
| CAMSO MPT 552                                |            | CAMSO HXD SMOOTH                     |    |
| CAMSO 4L R1                                  |            | CAMSO HXD CHEVRON                    |    |
| CAMSO TM R4                                  |            | ON WHO OTHER OTHER WORK              | 00 |
| CAMSO MPT 793S                               |            | TECHNICAL DATA                       | 69 |
| CAMSO MPT 532R                               |            | TECHNICAL DATA   TIRES               |    |
| CAMSO MPT 553R                               | _ 32       | TECHNICAL DATA I TRACKS              |    |
|  |            |                                      |    |
| TIRES FOR WHEEL EXCAVATORS                   |            | WARRANTY                             | 82 |
| CAMSO WEX 752                                |            |                                      | 02 |
| CAMSO WL                                     | 34         |                                      |    |
| CAMSO WEX 552                                |            |                                      |    |
| CAMSO WEX 583S                               | 35         |                                      |    |
| CAMSO WEX 732                                | 36         |                                      |    |
| CAMSO WEX 553                                | 36         |                                      |    |

# **PRODUCT NAMING SYSTEM | CONSTRUCTION TIRES**

Formula: BRAND NAME + PRIMARY MACHINE TYPES + PRODUCT DETAILS

ex.: Camso SKS 793S

**Brand name: CAMSO** 

#### PRIMARY MACHINE TYPES



#### **PRODUCT DETAILS**

1st number: POSITIONING

| Тор   | 7 |
|-------|---|
| Core  | 5 |
| Entry | 3 |

| Έ |
|---|
|   |

| Soft surfaces                 | 1 |
|-------------------------------|---|
| Mixed soft surfaces           | 3 |
| Mixed<br>hard surfaces        | 5 |
| Hard surfaces                 | 7 |
| Severe surfaces<br>(Solid)    | 8 |
| Severe surfaces<br>(SolidAir) | 9 |


3<sup>rd</sup> number: **PATTERN** 


| Rib                                 | 0 |
|-------------------------------------|---|
| R-1                                 | 1 |
| Directional<br>(R-4, L-2, E-2, G-2) | 2 |
| Non-directional<br>(E-3, L-3, G-3)  | 3 |
| L-4, E-4                            | 4 |
| L-5 lug                             | 5 |
| L-5 smooth                          | 6 |
| All-season                          | 8 |


Letter: PRODUCT TYPE


| Bias   | - |
|--------|---|
| Radial | R |
| Solid  | S |

Surface condition classification









# **NAMING REFERENCE GUIDE | CONSTRUCTION TIRES\***

## LEGACY TIRES REPLACED WITH NEXT GENERATION TIRES

| LEGACY PATTERN | LEGACY NAME            |             | NEW PATTERN | NEW NAME         |
|----------------|------------------------|-------------|-------------|------------------|
|                | SOLIDEAL<br>Xtra Wall  | Replaced by |             | CAMSO<br>SKS 532 |
|                | SOLIDEAL<br>Hauler SKS | Replaced by |             | CAMSO<br>SKS 732 |
| <b>S</b>       | SOLIDEAL<br>XD 44      | Replaced by |             | CAMSO<br>SKS 775 |
|                | SOLIDEAL<br>SL G2      | Replaced by |             | CAMSO<br>TLH 732 |
|                | SOLIDEAL<br>SL G3      | Replaced by |             | CAMSO<br>TLH 753 |

# LEGACY TIRES WITH NEW NAME CHANGE ONLY

| PATTERN       | LEGACY                          | NEW               | PATTERN | LEGACY                       | NEW               | PATTERN | LEGACY                      | NEW               |
|---------------|---------------------------------|-------------------|---------|------------------------------|-------------------|---------|-----------------------------|-------------------|
| To the second | SOLIDEAL<br>Gripper             | CAMSO<br>SKS 332  |         | SOLIDEAL<br>MR F3            | CAMSO<br>BHL 530  | -       | SOLIDEAL<br>SRLS L5         | CAMSO<br>WHL 776R |
|               | SOLIDEAL<br>SKS R1              | CAMSO<br>SKS 511  |         | SOLIDEAL<br>SLA R4           | CAMSO<br>BHL 532  | 5       | SOLIDEAL<br>TH2             | CAMSO<br>TLH 532  |
|               | SOLIDEAL<br>Safety<br>Master    | CAMSO<br>SKS 782S | りは      | SOLIDEAL<br>BHZ              | CAMSO<br>BHL 753  | 奈       | SOLIDEAL<br>SolidAir<br>TLH | CAMSO<br>TLH 792S |
|               | SOLIDEAL<br>Safety<br>Master SM | CAMSO<br>SKS 786S |         | SOLIDEAL<br>SRGP<br>L3/E3/G3 | CAMSO<br>WHL 753R |         | SOLIDEAL<br>WEX             | CAMSO<br>WEX 552  |
|               | SOLIDEAL<br>SolidAir<br>SKS     | CAMSO<br>SKS 792S |         | SOLIDEAL<br>RM E3/G3         | CAMSO<br>WHL 773  |         | SOLIDEAL<br>Bagger HT       | CAMSO<br>WEX 583S |
| ed ha         | SOLIDEAL<br>SolidAir SM         | CAMSO<br>SKS 796S |         | SOLIDEAL<br>SRLD L5          | CAMSO<br>WHL 775R | F # 9   | SOLIDEAL<br>SM C1           | CAMSO<br>CMP 576  |

# TIRE COMPLETE LINE OVERVIEW

#### **SKID STEER LOADERS**



CAMSO SKS 732



CAMSO SKS 532



CAMSO SKS 332



CAMSO SKS 753



CAMSO SKS 775



CAMSO HAULER SKZ



CAMSO SKS 511



CAMSO SKS 792S



CAMSO SKS 782S



CAMSO SKS 793S



CAMSO SKS 796S



CAMSO SKS 786S

#### UNDERGROUND MINING EQUIPMENT



CAMSO MST 776



SOLIDEAL HAULER LT



SOLIDEAL RES 550 MAGNUM SERIES

#### TELESCOPIC HANDLERS, COMPACT WHEEL LOADERS AND BACKHOE LOADERS



CAMSO MPT 732



CAMSO TM R4



CAMSO SL R4



CAMSO MPT 532R



CAMSO MPT 753



CAMSO 4L I3



CAMSO MPT 553R



CAMSO BHL 753



CAMSO 4LR1



CAMSO TM R1



CAMSO BHL 532



CAMSO BHL 530



CAMSO TLH 792S



CAMSO MPT 793S

# RADIAL

#### WHEEL LOADERS, ARTICULATED DUMP TRUCKS AND MOTOR GRADERS



**CAMSO** WHL 753R



**CAMSO ADT 753R** 



CAMSO **EMT 553R** 



**CAMSO EMT 538R** 



CAMS0 WHL 775R



CAMS0 WHL 776R



CAMS0 **GRD 533R** 



CAMSO LM L2



CAMSO LM L3



CAMSO WHL 773



CAMSO WHL 775



CAMSO **GRD 732** 



CAMSO **TLH 732** 



CAMSO **TLH 532** 



CAMSO **TLH 753** 

#### WHEEL EXCAVATORS AND MATERIAL HANDLERS



CAMSO WEX 752



CAMSO WL



CAMSO WEX 552



CAMSO **WEX 553** 



CAMSO **WEX 732** 



SOLIDEAL HAULER LT



SOLIDEAL HAULER SM



SOLIDEAL HA-TR



CAMSO **WEX 583S** 



SOLIDEAL MAGNUM BAGGER

#### MINI-DUMPERS AND **SELF-LOADING MIXERS**



CAMSO MPT 552



CAMSO DMP 532

#### **COMPACTION EQUIPMENT**



CAMSO CMP 533



CAMSO CMP 576





# TIRES FOR SKID STEER LOADERS



CAMSO SKS 732



CAMSO SKS 532



CAMSO SKS 332



CAMSO SKS 753



CAMSO SKS 775



CAMSO HAULER SKZ



CAMSO SKS 511



CAMSO SKS 792S



CAMSO SKS 782S



CAMSO SKS 793S



CAMSO SKS 796S



CAMSO SKS 786S

#### MAY ALSO FIT ON









## **Best off-road traction and durability**

# Extra thick Void Guard

Maximizes tread impact protection to reduce risk of punctures

# Wraparound stepped tread design

Maximizes tread cleanout for best off-road traction



# Impact Guard with enhanced rim protection


Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires

# Massive directional tread depth

Maximizes off-road traction and durability

The ultimate mixed soft surface skid steer tire solution. Deepest traction tread with enhanced protective features to maximize durability in softer conditions.

# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



| POPULAR SIZES |  |
|---------------|--|
| 10-16.5 NHS   |  |
| 12-16.5 NHS   |  |
| 14-17.5 NHS   |  |
|               |  |

# CAMSO **SKS 532**





### Exceptional durability, traction and value

# 3

#### **OUR MOST POPULAR TIRE**

- Enhanced tread depth with curved lug design
  Ensures great durability and improved traction
- Impact Guard with enhanced rim protection
  Provides maximum sidewall and rim flange protection,
  reducing impact damage and flat tires
- Void Guard
  Enhances tread impact protection to reduce risk of punctures
- Stepped tread design
  Enhances cleanout for improved off-road traction

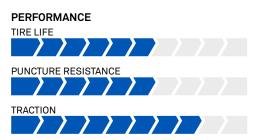



#### **POPULAR SIZES**

27x8.50-15 NHS

10-16.5 NHS

12-16.5 NHS

See full size list on page 70


# CAMSO **SKS 332**




#### Superior value and performance

- Natural rubber compounds
  Provides good chunk and tear resistance
- Directional lug design
  Provides good traction in general-duty applications
- Wider lug width at shoulder
  Provides good stability and promotes even wearing







#### POPULAR SIZES

10-16.5 NHS

12-16.5 NHS

# CAMSO **SKS 753**




# Most versatile all-season tire for mixed surface applications

# RENTAL FAVOURITE

- Innovative non-directional tread pattern
  Provides greater durability and versatility
  for mixed surface applications
- Optimzed lug-to-void ratio tread design
  Provides excellent versatility and durability
- Impact Guard with enhanced rim protection
  Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires
- Open, stepped shoulder lugs
  Enhances cleanout and traction on softer surfaces





POPULAR SIZES

27x8.50-15 NHS

10-16.5 NHS

12-16.5 NHS

See full size list on page 70

# CAMSO **HAULER SKZ**




# Trusted and versatile solution for mixed hard surface applications

- Deep non-directional tread
  Provides enhanced durability on mixed hard surface applications
- High lug-to-void ratio tread
  Provides excellent traction and versatility
- Traditional heavy sidewall design
  Provides good side impact protection for fewer flat tires



#### PERFORMANCE

PUNCTURE RESISTANCE
TRACTION



POPULAR SIZES

31x15.50-15 NHS

33x15.50-16.5 NHS

12-16.5 NHS


# CAMSO **SKS 775**




# Extreme-duty combination of durability and puncture resistance



- Maximum tread depth with highest lug-to-void ratio
  Maximizes tire life and tread impact resistance
- Innovative open shoulder, stepped tread design Exceptional durability with enhanced traction
- Enhanced next generation Rim Guard
  Maximizes rim flange protection against damage
  from impacts
- Impact Guard sidewall design
  Provides maximum sidewall protection,
  reducing impact damage and flat tires

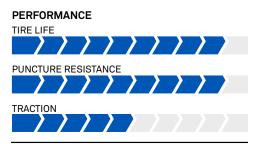



POPULAR SIZES

10-16.5 NHS

12-16.5 NHS

14-17.5 NHS

See full size list on page 70

# CAMSO **SKS 511**







#### Off-road traction at its best



- Aggressive curved R-1 tread pattern
  Maximizes traction and improves ride quality
- Stepped tread design with wide lug spacing
  Provides enhanced cleanout for improved traction
- Heavy-duty reinforced sidewall
  Provides side impact protection for fewer flat tires





POPULAR SIZES

29x12.50-15 NHS

31x15.50-15 NHS

33x15.50-16.5 NHS

# CAMSO **SKS 792S**





### Flat-proof durability meets off-road traction

- Stepped tread design
  - Provides excellent tread cleanout for improved off-road traction
- Reusable wheel Enables tire only replacement and lowers overall cost of ownership
- Optimized conical aperture design Improves ride quality and reduces aperture cracking

#### **PERFORMANCE**

TIRE LIFE



**POPULAR SIZES** 

27x10-12

31x10-20

See full size list on page 70

# CAMSO **SKS 782S**



### Flat-proof durability meets off-road traction



- Stepped tread design
  - Provides excellent tread cleanout for improved off-road traction
- Reusable wheel
  - Enables tire only replacement and lowers overall cost of ownership
- Quick Fit design

Eliminates lock & side rings for quicker installation

#### **PERFORMANCE**

TIRE LIFE

PUNCTURE RESISTANCE



#### **POPULAR SIZES**

8.00-16

31x10-20

33x12-20



## Severe-duty, flat-proof solution with non-directional tread

# Innovative non-directional tread pattern

Optimizes durability and versatility on mixed and hard surfaces

#### Increased wearable tread

Improves durability for longer service life



# Elongated conical aperture design

Provides excellent ride quality and reduces cracking

#### **Quick Fit design**

Eliminates lock and side rings for quicker installation

Next-generation versatile solid tire solution. Engineered to deliver excellent ride quality and best durability for mixed- and hard-surface skid steer applications.

# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



#### **POPULAR SIZES**

27x8.50-16 31x10-20 33x12-20

# CAMSO **SKS 796S**



### Smooth surface, flat-proof solid solution



- Optimized conical aperture design
  Improves ride quality and reduces aperture cracking
- Smooth, full-width footprint
  Provides outstanding tread life and excellent stability
- Reusable wheel
  Enables tire only replacement and lowers overall
  cost of ownership
- Quick Fit design
  Eliminates lock & side rings for quicker installation

#### PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE





**POPULAR SIZES** 

31x10-20

33x12-20

36x14-20

See full size list on page 72

# CAMSO **SKS 786S**



### Smooth surface, flat-proof solid solution



- Smooth, full-width footprint
  Provides excellent stability and tread life
- Reusable wheel
  Provides lower cost per hour and quicker installation
- Quick Fit design
  Eliminates lock & side rings for quicker installation



#### **PERFORMANCE**

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



#### **POPULAR SIZES**

31x10-20

33x12-20



# TIRES FOR BACKHOE LOADERS



CAMSO BHL 732



CAMSO BHL 532



CAMSO SLR4



CAMSO BHL 753



CAMSO BHL 530

MAY ALSO FIT ON



## CAMSO BHL 732







## **Best off-road traction and durability**

# Massive directional tread lugs with extended centre blocks

Maximizes off-road traction and durability on mixed and hard surfaces

# Wraparound stepped tread design

Maximizes tread cleanout for best off-road traction



#### Extra thick void guard


Maximizes tread impact protection to reduce risk of punctures

# Heavy-duty sidewall with enhanced rim protection

Provides enhanced sidewall and rim flange protection, reducing impact damage and flat tires

The ultimate mixed soft surface backhoe tire solution. Deepest traction tread with enhanced protective features to maximize durability in softer conditions.

# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



| POPULAR SIZES |  |
|---------------|--|
| 320/80-18 IND |  |
| 400/70-20 IND |  |
| 440/80-24 IND |  |
| 480/80-26 IND |  |
| 440/80-28 IND |  |
|               |  |


# CAMSO BHL 532




### **Durability meets ride quality**



- Optimized continuous contact tread design
  Improves ride quality when roading
- Stepped tread design
  Provides enhanced cleanout for improved traction
- Heavy-duty carcass construction
  Improves stability and sidewall protection

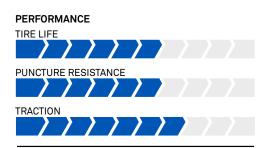



POPULAR SIZES

12.5/80-18 IMP

16.9-24 IND

19.5L-24 IND

See full size list on page 72

CAMSO **SL R4** 





## Heavy-duty durability and traction


- Heavy-duty carcass
  Improves stability and sidewall protection
- Stepped tread design
  Provides enhanced cleanout for improved traction
- Optimized lug-to-void ratio with deep tread Increases tread life and off-road traction

## PERFORMANCE

PERFORMANCE
TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



POPULAR SIZES

12.5/80-18 IMP

18.4-26 IND

16.9-28 IND

# CAMSO **BHL 753**




# Comfort and durability for roading and abrasive conditions



- Non-directional deep tread
  Ensures even tread wear for greater durability
- Optimized continuous-contact tread pattern
  Significantly reduces vibration for improved ride quality
- High lug-to-void ratio tread
  Protects against tread impacts and punctures
- Heavy-duty carcass construction Improves stability when roading





#### **POPULAR SIZES**

12.5/80-18 IMP

18.4-26 IND

16.9-28 IND

See full size list on page 70


# CAMSO **BHL 530**




### Performance and quality you can rely on



- Engineered F-3 RIB tread design
  Provides smooth ride and effective steering
- Robust, heavy-duty carcass
  Reduces tread crowning for even wearing and excellent stability
- Enhanced tread depth Extends tread life





POPULAR SIZES

11L-15SL IMP

11L-16SL IMP



# TIRES FOR TELEHANDLERS



CAMSO TLH 732+



CAMSO TLH 732



CAMSO TLH 532



CAMSO TLH 753



CAMSO TLH 792S



CAMSO TLH 592S

MAY ALSO FIT ON







## Ultimate off-road traction and stability

# Void guard impact protection

Enhances tread impact resistance to reduce risk of punctures

# Wraparound stepped tread design

Maximizes tread cleanout for best off-road traction



# Massive tread depth with curved tread lugs


Ensures excellent traction on soft surfaces and long wearing durability when operating at higher speed

# Impact guard with enhanced rim protection

Provides enhanced sidewall and rim flange protection, reducing impact damage and flat tires

Excellent solution for tough off-road applications delivering superior traction, durability and impact resistance in pneumatic grader tires

# PUNCTURE RESISTANCE TRACTION



#### POPULAR SIZES

13.00-24

14.00-24

See full size list on page 68

**PERFORMANCE** 

## CAMSO TLH **532**








### Superior value and performance

- Optimized lug-to-void ratio with deep tread
  Increases tread life and off-road traction
- Heavy-duty carcass construction
  Improves stability and sidewall protection
- Flat tread profile
  Resists tread crowning for even wearing

#### PERFORMANCE

PUNCTURE RESISTANCE
TRACTION



#### **POPULAR SIZES**

13.00-24

14.00-24

See full size list on page 73

# CAMSO **TLH 753**








### Next generation durability and versatility

- Innovative non-directional tread pattern
  Provides greater durability and versatility
  for mixed surface applications
- Open, stepped shoulder lugs
  Enhances cleanout and traction when on softer surfaces
- Optimzed lug-to-void ratio tread design
  Provides excellent traction, durability and stability
  when operating at higher speeds
  - Impact Guard with enhanced rim protection
    Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires

#### PERFORMANCE

PUNCTURE RESISTANCE
TRACTION



#### POPULAR SIZES

13.00-24 14.00-24 370/75-28 400/75-28



## Severe-duty solid tire solution

# **Engineered** solid tire solution

Provides flat-free operation and ultimate durability

# Massive directional tread depth

Maximizes off-road traction and durability



# Patented triangular aperture design

Optimizes stability, strength and comfort

#### Stepped tread design

Enhances cleanout for improved off-road traction

A severe-duty flat-free telehandler tire. With optimized stability, durability and comfort, it delivers flat-free operation and traction in extreme applications.

# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



#### **POPULAR SIZES**

13.00-24

14.00-24





## Flat-free performance and value

#### **Engineered solid** tire solution

Provides flat-free operation and ultimate durability

#### Extra-deep directional tread design

Increases tread life and off-road traction



#### Patented triangular aperture geometry

Optimizes stability, strength and comfort

#### Stepped tread design

Enhances cleanout for improved off-road traction

A heavy-duty flat-free telehandler tire solution. Fully predictable lifetime, it delivers optimized stability, traction and value.





#### **POPULAR SIZES**

13.00-24 14.00-24







# TIRES FOR COMPACT WHEEL LOADERS, MINI-DUMPERS AND COMPACT TELEHANDLERS







CAMSO MPT 753



CAMSO MPT 552



CAMSO 4L R1



CAMSO TM R4



CAMSO MPT 793S



CAMSO MPT 532R



CAMSO MPT 553R

#### MAY ALSO FIT ON















## Best off-road traction and durability

# Massive directional tread lugs with extended centre blocks

Maximizes off-road traction and durability on mixed and hard surfaces

# Wraparound stepped tread design

Maximizes tread cleanout for best off-road traction



#### Extra thick void guard


Maximizes tread impact protection to reduce risk of punctures

# Heavy-duty sidewall with enhanced rim protection

Provides enhanced sidewall and rim flange protection, reducing impact damage and flat tires

The ultimate mixed soft surface backhoe tire solution. Deepest traction tread with enhanced protective features to maximize durability in softer conditions.

# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



# **CAMSO MPT 753**







## The next generation in versatility and durability

Flat non-directional tread pattern with high lug-to-void ratio

Enhances stability, ride quality and durability

#### **Extra thick Void Guard**

Maximizes tread impact protection to reduce risk of punctures



# Impact Guard with enhanced rim protection


Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires

# Open, stepped shoulder lugs

Enhances versatility, tread cleanout and traction on softer surfaces

Engineered to provide enhanced traction in a variety of surface applications without sacrificing ride quality. Excellent overall durability and puncture resistance ensure maximum service life.





| POPULAR SIZES                 |  |
|-------------------------------|--|
| 340/80-20 IND                 |  |
| 400/70-20 IND                 |  |
| 400/70-24 IND                 |  |
| 400/80-24 IND                 |  |
| 460/70-24 IND                 |  |
| See full size list on page 67 |  |



#### **CAMSO MPT 552**

A smooth ride with enhanced traction

# CAMSO **4L R1**









### Off-road traction and stability at its best

- Aggressive curved R-1 tread pattern
  Maximizes traction and improves ride quality
- Stepped tread design
  Provides enhanced cleanout for improved traction
- Heavy-duty reinforced sidewall
  Provides good side impact protection for fewer flat tires
- Extra wide and flat tread profile
  Increased contact area enhances stability and traction





#### **POPULAR SIZES**

405/70-20

\_\_\_\_\_

15.5/80-24 IMP

16.5/85-24 IMP

See full size list on page 70

# CAMSO **TM R4**






### **Durable off-road performance**

- Stepped tread design
  Enhances tread cleanout for improved traction
- Square flat tread profile with centre reinforcement bar
  Promotes even wear across tread surface with increased stability
- Optimized lug-to-void ratio
  Enhances longevity and tread puncture resistance
- Heavy-duty carcass
  Provides excellent stability and side impact resistance

#### PERFORMANCE

PUNCTURE RESISTANCE

TRACTION



#### **POPULAR SIZES**

18-19.5

405/70-20

400/80-24 IND

# CAMSO **MPT 793S**





## Severe-duty flat-free tire solution

# Purpose-built engineered solid tire design

Provides flat-free operation and ultimate productivity in severe conditions



# Triangular aperture sidewall design

Maximizes stability and ride quality

#### Stepped shoulder lugs

Enhances tread cleanout for better traction in softer surfaces

# Massive non directional tread pattern

Improves durability and versatility

A severe-duty solid multi purpose tire solution. With flat-free operation, the MPT 793S provide excellent stability, ride quality and unmatched durability.

# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



#### **POPULAR SIZES**

385/70-20

375/85-24

# CAMSO MPT 532R







### Superior off-road traction and durability

1

- Aggressive tread design with deep lugs
  Provides superior off-road traction
- Wide and flat tread profile
  Enhances stability and even wear
- Strong radial carcass Improves comfort, traction and durability

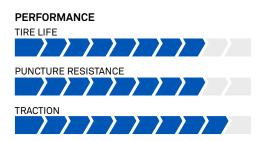



#### POPULAR SIZES

400/70R24 IND

400/80R24 IND

460/70R24 IND

See full size list on page 72

# CAMSO MPT 553R







### **Optimized performance on mixed surfaces**

2

- Non-directional tread pattern
  Optimizes versatility and durability on mixed and hard surfaces
- Large interlocked centre blocks
  Improves lateral stability and driving comfort
- Wide flat tread profile
  Provides enhanced traction, stability and even wear
- Strong radial carcass

  Maximizes tread impact resistance, comfort and durability

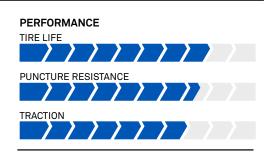



#### POPULAR SIZES

335/80R18

405/70R18

405/70R20



# TIRES FOR WHEEL EXCAVATORS



CAMSO WEX 752



CAMSO WL



CAMSO WEX 552



CAMSO WEX 583S



CAMSO WEX 732



CAMSO WEX 553

# **CAMSO WEX 752**









- Massive directional tread lugs with extended centre
  Maximizes off-road traction and durability
- Extra thick Void Guard

  Maximizes tread impact protection to reduce risk of punctures
- Wraparound Stepped Tread Design
  Maximizes tread cleanout for best off-road traction
- Integrated Stone Guard\*
  Eliminates the need for a spacer while protecting inner sidewalls against impacts
- Heavy-duty sidewall
  Provides enhanced sidewall protection, maximizes stability
  and operator comfort

\*Only available on tire size 290/90-20

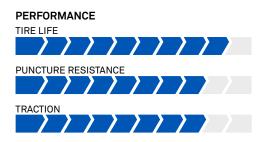



#### **POPULAR SIZES**

| 8.25-20  | 9.00-20   |
|----------|-----------|
| 10.00-20 | 290/90-20 |

See full size list on page 71

# CAMSO **WL**



## High performance, enhanced protection

- Heavy-duty carcass construction
- Optimized lug-to-void ratio with deep tread Increases tread life and off-road traction


Improves stability and sidewall protection

- Flat tread profile with centre reinforcement
  Promotes even wear across tread surface with increased stability
- Extra deep directional lug design
  Provides enhanced traction in heavy-duty applications



## PERFORMANCE





#### **POPULAR SIZES**

9.00-20 10.00-20 11.00-20


# CAMSO WEX 552








- Robust carcass
  - Enhances stability and side impact resistance
- Natural rubber compounds
  Provides good chunk and tear resistance
- Deep directional lug design
  Provides good traction in general-duty applications

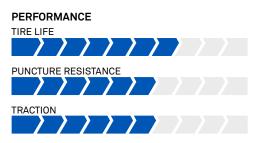



#### POPULAR SIZES

8.25-20

9.00-20

10.00-20

See full size list on page 71

# CAMSO **WEX 583S**









## Solid, high traction solution for severe conditions

- Solid 2 layer construction
  Provides maximum stability and flat-free operation
- Aggressive tread design
  Provides enhanced traction in off-road conditions
- Natural rubber compounds with optimized lug-to-void ratio Enhances chunk resistance and stability

#### PERFORMANCE

PUNCTURE RESISTANCE

TRACTION



#### POPULAR SIZES

9.00-20

10.00-20

12.00-20

# CAMSO WEX 732



#### Ultimate off-road traction and flotation




- Extra thick Void Guard

  Maximizes tread impact protection to reduce
  risk of punctures
- Stepped tread design
  Provides enhanced cleanout for improved traction
- Impact Guard with enhanced rim protection
  Provides maximum sidewall and rim flange protection,
  reducing impact damage and flat tires
- Low aspect ratio sidewall

  Maximizes traction and flotation





#### **POPULAR SIZES**

**500/45-20 IND** (8.25-20 Dual)

See full size list on page 72

# CAMSO **WEX 553**




#### **Enhanced durability and sidewall protection**

- Non-directional tread pattern with high lug-to-void ratio Provides greater durability and versatility for mixed and hard surfaces
- Full wraparound steps on centre lugs

  Maximizes tread cleanout for best off-road traction
- Integrated Stone Guard
  Eliminates the need for a spacer while protecting inner sidewalls
  against impacts
- Heavy-duty bias sidewall
  Provides enhanced sidewall protection, maximizes stability
  and operator comfort



# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



**POPULAR SIZES** 

315/70-22.5









# TIRES FOR SPECIALTY APPLICATIONS



CAMSO CMP 533



CAMSO CMP 576



CAMSO AWP 583S



CAMSO MST 776



SOLIDEAL HAULER LT




SOLIDEAL RES 550 MAGNUM SERIES


# CAMSO CMP 533





- Optimized R-3 tread pattern
  Minimizes ground pressure and damage
  for better compaction performance
- Premium rubber compounding
  Resists weather-checking caused by UV
  and ozone damage
- Stepped tread design
  Provides enhanced cleanout for improved traction

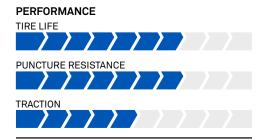



**POPULAR SIZE** 

23.1-26 IND

See full size list on page 75


# CAMSO CMP 576




## **Excellent compaction performance and durability**

- Smooth, flat tread profile
  Promotes even wear and reduced ground pressure
  for better compaction performance
- Heat-resistant rubber compound
  Improves durability for lower cost per hour
- Heavy-duty carcass
  Provides excellent stability and durability







POPULAR SIZES

7.50-15 NHS

8.50/90-15K


11.00-20 NHS




## **Built for safety and durability**



Purpose-built to maximize productivity for indoor scissor lift application, this non-marking cured-on tire solution ensures long service life while ensuring safe lift operation.

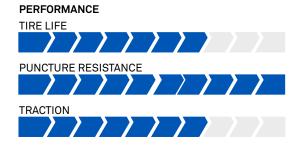



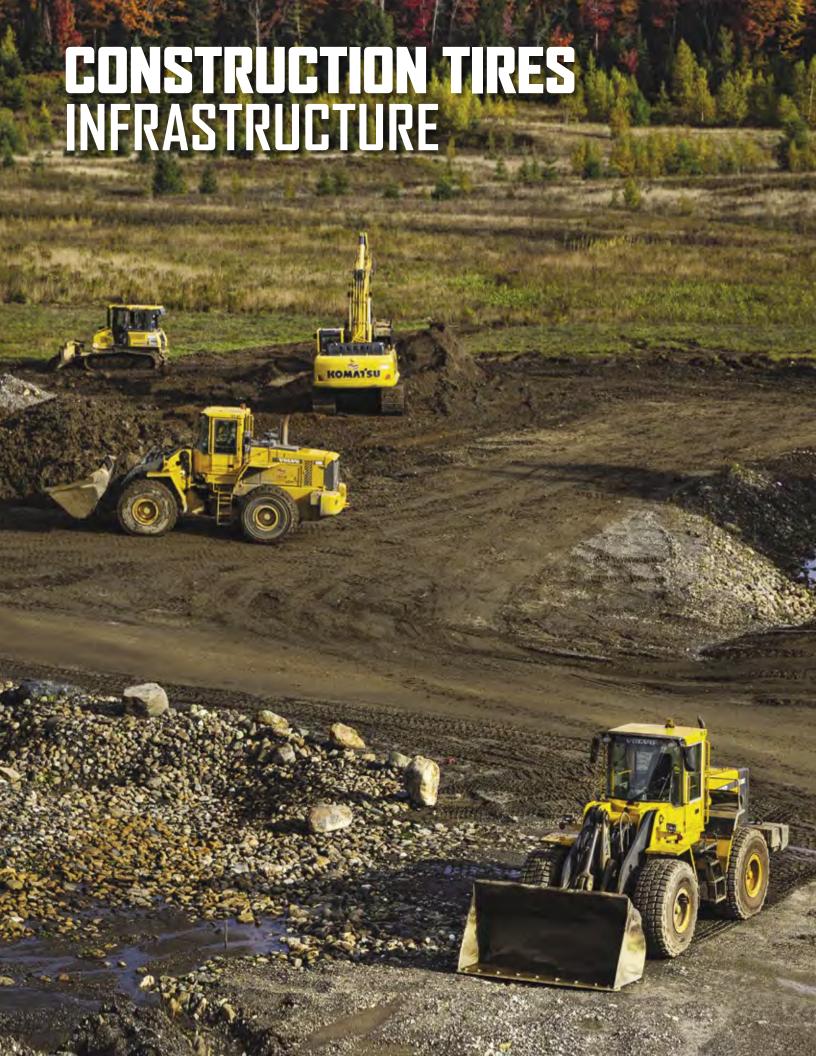







# TIRES FOR WHEEL LOADERS, ARTICULATED DUMP TRUCKS AND MOTOR GRADERS



CAMSO WHL 753R



CAMSO WHL 553R



CAMSO WHL 775R



CAMSO WHL 776R



CAMSO EMT 538R



CAMSO EMT 553R



CAMSO GRD 533R



CAMSO LM L2



CAMSO LM L3



WHL 775



CAMSO WHL 773







## Radial performance, versatility and durability

# Heavy-duty Dual-star carcass

Enhances stability and versatility for wheel loader, earthmover and motor grader applications

# Optimized offset tread pattern

Reduces vibration for improved ride quality



# Premium long-wearing tread compound


Provides excellent durability and low operating cost per hour

# Non-directional stepped design

Enhances cleanout for improved traction

Delivers excellent performance, versatility and durability. With enhanced stability, ride quality and traction, it's the best choice for both one-star and two-star applications.

# PERFORMANCE TIRE LIFE PUNCTURE RESISTANCE TRACTION



| POPULAR SIZES            |  |
|--------------------------|--|
| 17.5R25                  |  |
| 20.5R25                  |  |
| 23.5R25                  |  |
| 26.5R25                  |  |
| 29.5R25                  |  |
| 0 full dies list as a 27 |  |











## **Optimized performance on mixed surfaces**

# Offset non-directional tread pattern

Reduces vibration for improved ride quality

#### Optimized lug-to-void ratio

Increases tread life and off-road traction



#### Reinforced sidewall rib


Enhances sidewall protection to protect against impact damage

# Heavy-duty dual star rated carcass

Enhances stability and versatility for loader, earthmover and grader applications

A versatile and durable radial OTR tire optimized for mixed surfaces combining superior ride quality and traction for both one-star and two-star applications.





#### **POPULAR SIZES**

17.5R25 20.5R25 23.5R25 26.5R25 29.5R25

## CAMSO WHL 775R








#### Mixed hard surface L-5 radial durability at its best

- Extra-deep L-5 traction tread
  Provides reliable traction and enhanced protection against
  punctures in extreme mixed and hard surface applications
- Heavy-duty two-star rated carcass
  Enhances durability and resistance to punctures for extreme mixed and hard surface applications
- Contoured lug base
  Promotes stone ejection and reduces damage between lugs
- Extra flat tread profile
  Reduces tread crowning for even wear across tread surface

#### PERFORMANCE

PUNCTURE RESISTANCE
TRACTION



#### **POPULAR SIZES**

17.5R25

20.5R25

23.5R25

See full size list on page 74

## CAMSO **WHL 776R**





# Hard surface L-5S radial durability at its best

- Extra-deep L-5 smooth tread
  Best durability and resistance to flat tires
  for extreme hard surface applications
- Heavy-duty two-star rated carcass
  Enhances durability and resistance to punctures
  for extreme hard surface applications
- Extra flat tread profile
  Reduces tread crowning for even wear across tread surface
- Integral tread wear indicator
  Provides accurate indication of remaining service life




#### PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



#### POPULAR SIZES

17.5R25

23.5R25

26.5R25



# CAMSO








- Heavy-duty dual star rated carcass Enhances stability and versatility for loader, earthmover and grader applications
- Open shoulder tread pattern design Enhances tread cleanout for improved traction in mud and snow
- Reinforced sidewall rib Enhances protection against sidewall damage and punctures
- Winter-resistant rubber compound with deep lug siping Provides many biting edges and grader applications





#### **POPULAR SIZES**

17.5R25

20.5R25

23.5R25

See full size list on page 74

# CAMSO **EMT 553R**




#### Optimized on-road and off-road performance

- Non-directional tread pattern Increases durability and versatility on mixed and hard surfaces
- Interconnected multi-block tread pattern Improves stability, self-cleaning and grip on soft soils
- Strong radial carcass Maximizes comfort, traction and durability
- Low profile tire size Maximizes footprint, stability and wearable rubber volume



# **PERFORMANCE** TIRE LIFE PUNCTURE RESISTANCE



# CAMSO **GRD 533R**



# Optimized traction and performance on multiple surfaces




- Non-directional tread pattern
  Optimizes durability and traction
- Wide flat tread profile
  Provides enhanced grip, stability and flotation
- Interconnected multi-block tread pattern
  Improves self-cleaning and traction on soft soils
- Strong radial carcass

  Maximizes comfort, traction and durability



PUNCTURE RESISTANCE

TRACTION



**POPULAR SIZE** 

14.00R24

See full size list on page 73

# CAMSO **GRD 732**



#### Ultimate off-road traction and stability




- Void guard impact protection
  Enhances tread impact resistance to reduce risk of punctures
- Wraparound stepped tread design
  Maximizes tread cleanout for best off-road traction
- Massive tread depth with curved tread lugs
  Ensures excellent traction on soft surfaces and long wearing durability when operating at higher speeds
- Impact guard with enhanced rim protection
  Provides maximum sidewall and rim flange protection, reducing impact damage and flat tires

#### PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



#### **POPULAR SIZES**

13.00-24

14.00-24

16.00-24

# CAMSO LM L2






### Off-road traction and durability

2

- Heavy-duty carcass
  Increases side impact resistance and stability
- Stepped tread design
  Enhances tread cleanout for improved traction
- Deep and flat tread profile
  Reduces tread crowning for improved durability





#### **POPULAR SIZES**

15.5-25

17.5-25

20.5-25

See full size list on page 74

# CAMSO LM L3





### Multi-surface performance

3 4

- Heavy-duty carcass
  Increases side impact resistance and stability
- Non-directional tread pattern
  with optimized lug-to-void ratio
  Ensures even tread wearing for greater durability
- Stepped tread design
  Enhances tread cleanout for improved traction
- Deep and flat tread profile


  Reduces tread crowning for improved durability

#### PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



#### POPULAR SIZES

17.5 - 25

20.5 - 25

23.5 - 25



# CAMSO **WHL 775**





# Extreme-duty L-5 solution combining durability and puncture resistance




- Extra-deep L-5 lug tread Provides reliable traction and enhanced protection against punctures in extreme mixed and hard surface applications
- Heavy-duty reinforced carcass Enhances durability and stability under load in extreme mixed and hard surface applications
- Heavy-duty sidewall construction Protects against side impacts and damage in severe applications
- Contoured lug base Promotes stone ejection and resistance to cracking

Available in certain markets only. Please check with your sales representative.

#### **PERFORMANCE**

TIRE LIFE



#### **POPULAR SIZES**

17.5-25

20.5-25

23.5-25

See full size list on page 74

# CAMSO WHL 773





### Reliable performance in harsh applications

- **Heavy-duty carcass** Increases stability and side impact protection
- High lug-to-void ratio Provides excellent durability and tread impact protection
- Extra wide rock lug tread design Provides traction and durability in mixed and hard surface applications




#### **PERFORMANCE**

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION



#### **POPULAR SIZES**

17.5-25

23.5-25

26.5-25

## Underground hard surface performance and durability

# Massive L-5 smooth tread pattern

Provides excellent puncture and impact resistance

# Premium mining rubber compounds

Enhances wearing and cut resistance



# Impact guard sidewall design

Provides maximum sidewall protection, reducing impact damage and downtime


# Enhanced next generation Rim Guard

Maximizes rim flange protection against damage from impacts

Engineered to maximize service life and to resist sidewall and tread impact for maximized uptime in extreme underground mining application.

#### **PERFORMANCE**





#### **POPULAR SIZE**

12.00-24

See full size list on page 72



### SOLIDEAL **Hauler Lt**

Ready for your challenges



# SOLIDEAL RES 550 MAGNUM SERIES

Solid, hard surface solution for severe conditions

# CONSTRUCTION TRACKS



# THE CAMSO DIFFERENCE

At Camso we achieved an edge on our competition by differentiating ourselves in three specific ways:

## Camso is a leading manufacturer of OEM brands

Camso is a proud supplier of the world's best known construction brands. We have achieved our OEM positions through close collaboration, co-development, and validation with leading equipment manufacturers. Working with the OEM's has pushed our products to new levels of toughness and represents a symbol of quality and performance end-users can trust.

Many Camso products are also offered through various OEM aftermarket programs.

# Camso offers the best warranty on the market

Actions speak louder than words. This is why we improved our terms and back all of our tracks with an industry leading non-prorated warranty on material and workmanship.

| TRACK               | MACHINE<br>TYPE | MONTHS 0 | F SERVICE | HOURS LIMIT |          |  |
|---------------------|-----------------|----------|-----------|-------------|----------|--|
| SERIES              |                 | OLD      | NEW       | OLD         | NEW      |  |
| CAMSO SD<br>series  | CTL             | 13       | 18        | 1100        | 1500     |  |
|                     | MEX             | 24       | 30        | 2000        | 2500     |  |
| CAMSO HXD<br>series | CTL             | 18       | 24        | 1500        | 2000     |  |
|                     | MEX             | 36       | 42        | 3000        | 3500     |  |
|                     | EXC PADS        | N/A      | 36        | N/A         | 3000     |  |
|                     | MTL             | 14       | 14        | 1200        | 1200     |  |
|                     | RUBBER OTT      | 12       | 12        | No limit    | No limit |  |
|                     | STEEL OTT       | N/A      | 24        | N/A         | No limit |  |




TOTAL



# Camso construction tracks offer lowest operating cost solution

#### **DURABILITY**

Camso reduces the total cost of tracks over the machine lifetime with high quality rubber compounds.

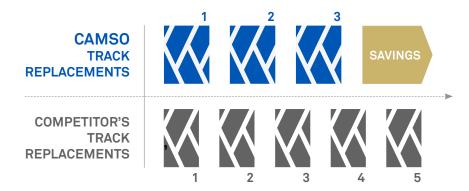



#### RELIABILITY

Camso technology solves problems like detracking and cable breakage to increase uptime over the machine lifetime.





# EXCEPTIONAL PERFORMANCE

Camso keeps you productive on the job-site with the right products for your application and surface type.





#### THE CAMSO DIFFERENCE

Camso tracks reduce the overall cost of equipment ownership over the lifetime of the machine.

# TRACKS COMPLETE LINE OVERVIEW

#### TRACKS FOR MINI-EXCAVATORS



#### TRACKS FOR MULTI-TERRAIN LOADERS



MTL HXD

#### TRACKS FOR CARRIERS



CAMSO CARRIER HXD

#### TRACKS FOR COMPACT TRACK LOADERS



CTL HXD

OTT TRACKS FOR SKID STEER LOADERS



#### TRACKS FOR PAVERS



CAMSO HXD CHEVRON




CAMSO HXD SMOOTH

# TREAD PATTERNS



#### **COMPACT TRACK LOADERS**

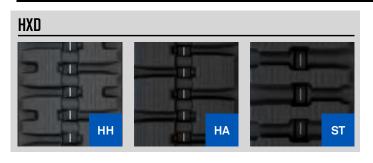

#### SD



# TREAD PATTERNS (continued)



## MINI-EXCAVATORS

HXD







































**MULTI-TERRAIN LOADERS** 







OVER-THE-TIRE TRACKS (OTT)







**CARRIERS** 





**BV206** 





**PAVERS** 










#### **BEST CHOICE FOR ABRASIVE TERRAIN**

## The ultimate track for durability and performance

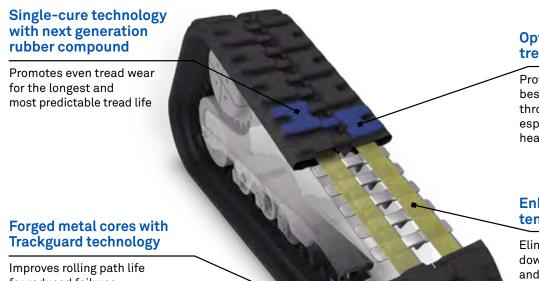

Optimized H pattern tread profile

Provides excellent best-in-class durability throughout service life, especially in abrasive heavy-duty applications

Enhanced endless hightensile steel cables

Eliminates unexpected downtime due to cable and joint failures

for reduced failures and enhanced durability

Ultimate durability and remarkable traction to maximize your uptime on heavy-duty applications.

# PERFORMANCE TREAD LIFE FAILURE RESISTANCE TRACTION

#### **BEST TRACK CHOICE FOR:**











#### **BEST CHOICE FOR MUD AND SNOW**


## All-season traction and versatility

# Low rolling-resistance rubber carcass

Minimizes wear on undercarriage parts for optimal equipment operation



Improves rolling path life for reduced failures and enhanced durability

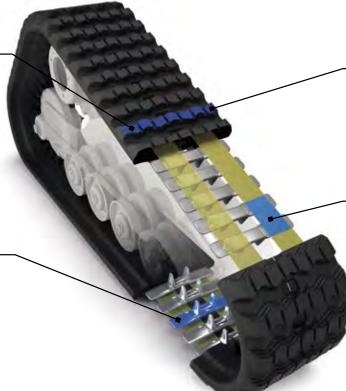

#### Versatile all-season traction tread pattern with self-cleaning lugs

Provides outstanding traction on various surface conditions year-round

# Endless high-tensile steel cables

Eliminates unexpected downtime due to cable and joint failures

A versatile solution that provides ultimate traction and excellent performance on various surface conditions year-round.

# PERFORMANCE TREAD LIFE FAILURE RESISTANCE TRACTION

#### **BEST TRACK CHOICE FOR:**







# CAMSO CTL SPROCKET




# **OEM quality and performance at aftermarket prices**

Fitments available for all major manufacturers

- Enhanced hardening with deeper penetration Provides longer sprocket wear
- Premium quality design and engineering Meets the toughest OEM specifications
- Optimized geometry and design
  Ensures best fitment with tracks for longer track life






See specifications on page 77

# CAMSO MTL HXD



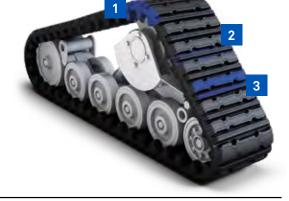

#### **Enhanced durability and protection**

Fitments available for all major manufacturers

- Single-cure technology with superior internal casing structure
  Designed to provide maximum drive lug bonding
  and utilisation life
- Heavy duty carcass construction
  Increases lateral stability to eliminate detracking for more uptimes
- Versatile all-purpose multi-bar tread pattern
  Performs excellent in traction applications,
  turf-friendly applications and everything in between

# PERFORMANCE TREAD LIFE

FAILURE RESISTANCE

TRACTION

BEST TRACK CHOICE FOR:



See specifications on page 80





#### **Exceptional off-road track performance**

Fitments available for all major manufacturers

- Case-hardened all-steel track construction

  Maximized durability and performance in severe applications
- Customizable sizing with variable pitch design Facilitates easy product selection and installation
- Engineered high-traction tread bar
  Enhanced all-around traction especially on open side slopes
  and unprecedented traction on ice
- Wide-void design
  Enhances debris and rock cleanout providing optimum traction
  on soft surfaces





TREAD LIFE



FAILURE RESISTANCE



#### **BEST TRACK CHOICE FOR:**







SLOPED

See specifications on page 81

# CAMSO **RUBBER OTT**



#### Track performance almost anywhere

Fitments available for all major manufacturers

- Full rubber track reinforced with steel core and cables
  Allows smoother operation on asphalt, concrete
  and turf surfaces without damage or marking
- Wide continuous rubber track footprint
  Increases flotation by 5 times compared to tires alone,
  and at least twice as much as standard steel tracks
- Embedded forged metal core with engineered wing design Ensures strength and ridgity to avoid detracking
- Internal traction rib
  Provides high traction between tire and track
  and prevents tire wear



#### **PERFORMANCE**

TREAD LIFE

FAILURE RESISTANCE

TRACTION

#### **BEST TRACK CHOICE FOR:**

SNOW TURF

DIRT




See specifications on page 80

# CAMSO **EXC HXD PADS**



## Extremely durable chain-on pads offering the best uptime solution

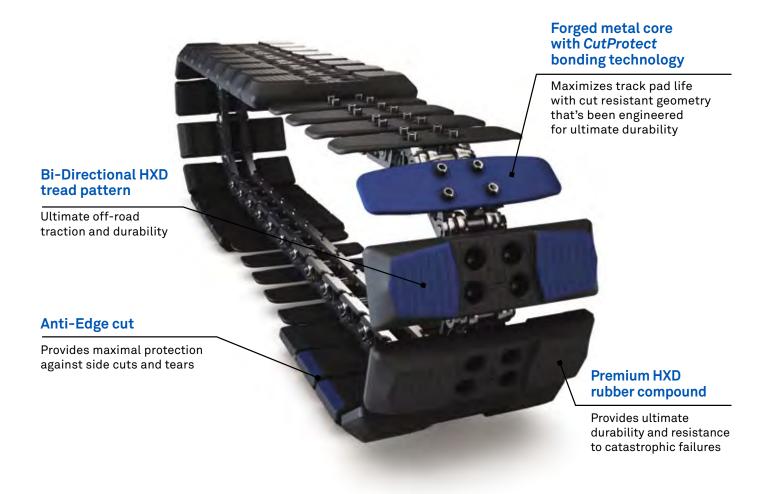

Chain-on pads (roadliners) with a premium quality HXD rubber compound. Supported by a forged metal plate with optimized geometry to maximize edge protection ensuring long service life.



#### **BEST TRACK CHOICE FOR:**











## Extreme durability and resistance to severe conditions

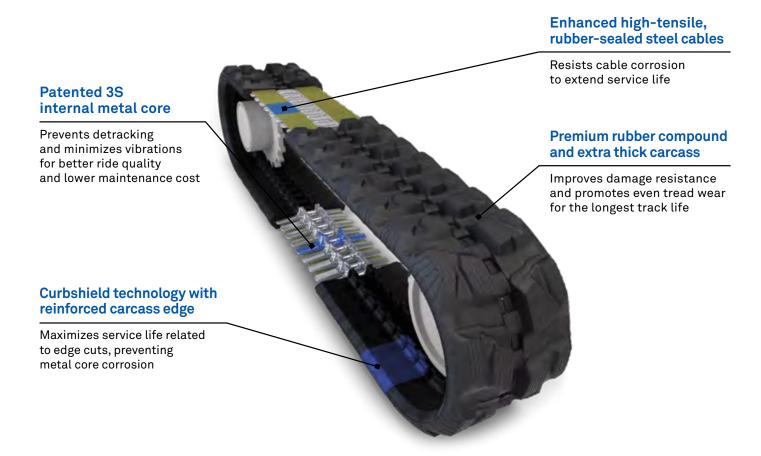

The ultimate solution for most users, engineered to provide maximum protection against damage and catastrophic failure, increasing your uptime.




#### BEST TRACK CHOICE FOR:

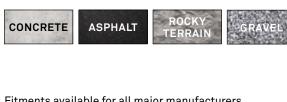





# Delivers enhanced service life with performance and predictability

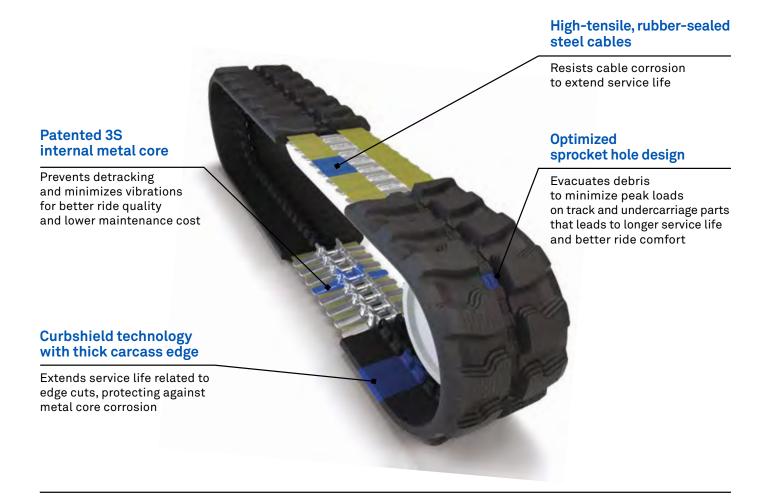

The best solution for heavy-duty applications. Designed to provide excellent protection against damage and failure for a long and predictable service life.




#### BEST TRACK CHOICE FOR:







## Top performance and uptime

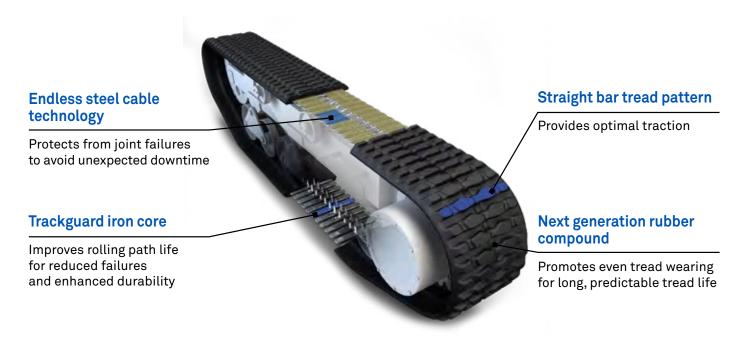

The ideal carrier track to perform in the most severe application and avoid unexpected downtime. It is built to provide best durability for a long and predictable track life.



#### **BEST TRACK CHOICE FOR:**









Fitments available for all major manufacturers See technical data on page 81



# CAMSO HXD CHEVRON Paver track

Durability meets traction



# CAMSO HXD SMOOTH Paver track

Durability at its best

# **TECHNICAL DATA**

# **TECHNICAL DATA | TIRES**

| Billion   Tirke Size  |      | IUAL DAIA         |      |                  |      |      |    |                             |
|---|------|-------------------|------|------------------|------|------|----|-----------------------------|
| Page  |      | TIRE SIZE         |      |                  | PAGE | O.D. |    | PID                         |
| Page  | 8    | 10x3 (8)          | -    | Camso AWP 583S   | 39   | 10.0 | -  | 31.182.251                  |
| Part  |      |                   |      | Camso Hauler SKS | -    | 22.8 | 16 | 8.161.8000 / 8.161.6500     |
| 12  |      |                   | 6    | Camso SKS 532    | 11   | 22.6 | 16 | 8.1210.9650                 |
| 12  |      | 23x8.50-12 SS     |      | Camso Xtra Wall  | -    | 22.4 | 18 | 8.356.8026                  |
| 12  |      |                   |      | Camso Hauler SKS | -    | 22.8 | 16 | 8.165.8002 / 8.165.7204     |
| 12   2612.00-12   S   |      |                   | 12 - | Camso SKS 532    | 11   | 22.5 | 16 | 8.1211.9654                 |
| 16.5  |      | 25x7-12           | -    | Solideal Magnum  | 52   | *    | *  | 9.1064.13611                |
| 10  | 12   |                   | 8    | Camso SKS 511    | 13   | 26.0 | 28 | 8.338.4267                  |
| Cambo Krts Wall   - 2.8.8   27  |      | 26x12.00-12 SS    |      | Camso SKS 532    | 11   | 25.5 | 25 | 8.1212.9658                 |
| Camso NRS 532   11   2.3   16   8.159.734   |      |                   | 10 - | Camso Xtra Wall  | _    | 25.8 | 27 | 8.430.8030 / 8.430.6644     |
| 11.1-ISSLIMP   12   Camso Krts Wall   22.5   14   8.777.8042  |      | 27x10-12          | 14   | Camso Xtra Wall  | _    | 27.1 | 24 | 1.1237.10771 / 1.1237.10828 |
| S,70-12 NHS   |      |                   |      | Camso Hauler SKS |      | 23.0 | 15 | 8.159.734                   |
| 11L-15SL IMP  |      | 5.70-12 NHS       | 4    |                  | 11   |      |    |                             |
| 11L-15SL IMP  |      |                   | -    |                  |      |      | 14 |                             |
| 15.3  |      | 11L-15SL IMP      | 12   |                  | 20   |      |    |                             |
| 15  |      |                   |      |                  |      |      | -  |                             |
| 15.3  |      | 27710100 1011110  |      |                  | _    |      |    |                             |
| 15  |      | 27x8.50-15 NHS    | 6    |                  | _    |      |    |                             |
| 152   27x8.50-15 NHS   8   Camso SKS 532   11   26.7   18   8.1208.9642   |      |                   |      |                  |      |      |    |                             |
| Table   Camso SKS 753   12   26.7   24   8.1181.9536  |      | 27x8 50-15 NHS    | 8    |                  | _    |      |    |                             |
| 15  |      | 27.00.00 10 1010  | -    |                  |      |      |    |                             |
| 153   |      | 29v12 50-15 NHS   | 8    |                  |      |      |    |                             |
| Section   Sect  | 15   | 20012.00 10 14110 |      |                  |      |      |    |                             |
| STATIS.50-15 NHS  |      |                   | -    |                  |      |      |    |                             |
| Camso Xtra Wall   - 31.0   30   8.775,7365 / 8.775,8267   |      | 31x15.50-15 NHS   | 8 -  |                  | _    |      |    |                             |
| 31x15.50-15 NHS   |      |                   | -    |                  | !!   |      |    |                             |
| 7.00-15 SS  |      | 21, 15 EO 15 NUO  | 10   |                  | 10   |      |    |                             |
| 7.50-15 NHS   |      |                   |      |                  |      |      |    |                             |
| 8.50/90-15K   |      |                   |      |                  |      |      |    |                             |
| 10.0/75-15.3 IMP  |      |                   |      |                  |      |      |    |                             |
| 10.0/75-15.3 IMP  |      |                   |      |                  |      |      |    |                             |
| 11.5/80-15.3 IMP  |      |                   |      |                  |      |      |    |                             |
| 11.5/80-15.3 IMP  | 45.0 | 10.0//5-15.3 IMP  |      |                  |      |      |    |                             |
| 14  | 15.3 |                   | 8    |                  |      |      |    |                             |
| 11L-16SL IMP 12 Camso BHL 530 20 31.3 16 2.97.543 27x8.50-16 - Camso SKS 793S 15 26.6 31 9.1572.17904  6.50-16 - Camso SKS 782S 14 29.3 18.9 9.87.4658  - Camso SKS 786S 16 29.3 - 9.89.491  16 7.50-16 - Camso SKS 782S 14 31.2 23.9 9.93.4663  - Camso SKS 782S 14 31.2 23.9 9.544.8573 / 9.543.8570  - Camso SKS 782S 14 32.2 17.6 9.98.4669  - Camso SKS 782S 14 32.2 17.6 9.101.4671  9.00-16 16 Camso BHL 573 - 36.2 26 2.1191.9580  16.1 14L-16.1SL IMP 14 Camso BHL 530 20 * * 2.110.586  8 Camso SKS 332 11 30.0 18 8.652.8038  Camso Hauler SKZ 12 30.9 39 8.177.8010 / 8.177.6510  Camso SKS 332 11 * * 8.1308.11047  Camso SKS 332 11 * * 8.1308.11047  Camso SKS 332 11 30.2 23 8.1004.8699 / 8.1004.8701  Camso SKS 783 12 31.1 37 8.1024.8833 / 8.1024.8835  Camso SKS 753 12 31.1 37 8.1024.8835  |      |                   | 14   |                  |      |      |    | -                           |
| 16.50-16  |      |                   | 10   |                  | _    |      |    |                             |
| 16  |      |                   |      |                  |      |      |    |                             |
| 16  |      | 2/x8.50-16        | _    |                  | _    |      |    |                             |
| 16  |      | 6.50-16           | _    |                  |      |      |    |                             |
| 7.50-16  - Camso SKS 782S 14 31.2 23.9 9.544.8573 / 9.543.8570  - Camso SKS 782S 14 32.2 17.6 9.98.4669  - Camso SKS 782S 14 32.2 17.6 9.101.4671  9.00-16 16 Camso BHL 573 - 36.2 26 2.1191.9580  16.1 14L-16.1SL IMP 14 Camso BHL 530 20 * * * 2.110.586  8 Camso SKS 332 11 30.0 18 8.652.8038  Camso Hauler SKZ 12 30.9 39 8.177.8010 / 8.177.6510  Camso SKS 332 11 * * * 8.1308.11047  Camso SKS 332 11 30.2 23 8.1004.8699 / 8.1004.8701  Camso SKS 732 10 30.6 29 8.954.8431  Camso SKS 753 12 31.1 37 8.1024.8833 / 8.1024.8835  Camso SKS 775 13 30.7 48 8.957.8437   |      |                   | -    |                  |      |      |    |                             |
| Range   Rang  | 16   | 7.50-16           | _    |                  |      |      |    |                             |
| 16.5     10-16.5 NHS   16     Camso SKS 782S   14   32.2   17.6   9.101.4671  |      |                   |      |                  |      |      |    |                             |
| 9.00-16 16 Camso BHL 573 - 36.2 26 2.1191.9580  16.1 14L-16.1SL IMP 14 Camso BHL 530 20 * * 2.110.586  8 Camso SKS 332 11 30.0 18 8.652.8038  Camso Hauler SKZ 12 30.9 39 8.177.8010 / 8.177.6510  Camso SKS 332 11 * * * 8.1308.11047  Camso SKS 532 11 30.2 23 8.1004.8699 / 8.1004.8701  Camso SKS 732 10 30.6 29 8.954.8431  Camso SKS 753 12 31.1 37 8.1024.8833 / 8.1024.8835  Camso SKS 775 13 30.7 48 8.957.8437  |      | 8.00-16           |      |                  |      |      |    |                             |
| 16.1         14L-16.1SL IMP         14         Camso BHL 530         20         *         *         2.110.586           16.5         8         Camso SKS 332         11         30.0         18         8.652.8038           16.5         Camso Hauler SKZ         12         30.9         39         8.177.8010 / 8.177.6510           Camso SKS 332         11         *         *         8.1308.11047           Camso SKS 532         11         30.2         23         8.1004.8699 / 8.1004.8701           Camso SKS 732         10         30.6         29         8.954.8431           Camso SKS 753         12         31.1         37         8.1024.8833 / 8.1024.8835           Camso SKS 775         13         30.7         48         8.957.8437   |      |                   |      |                  | 14   |      |    |                             |
| 16.5  10-16.5 NHS  8  |      |                   |      |                  | -    |      |    |                             |
| 16.5 NHS  10-16.5 |      | 14L-16.1SL IMP    |      |                  |      |      |    |                             |
| 16.5 NHS 10-16.5 NHS 10   Camso SKS 332   11   *  |      | 10-16.5 NHS       | 8    |                  |      |      |    |                             |
| 10-16.5 NHS  10 10-16.5 NHS  10 Camso SKS 532 11 30.2 23 8.1004.8699 / 8.1004.8701  Camso SKS 732 10 30.6 29 8.954.8431  Camso SKS 753 12 31.1 37 8.1024.8833 / 8.1024.8835  Camso SKS 775 13 30.7 48 8.957.8437  |      |                   |      |                  |      |      |    |                             |
| 16.5 10-16.5 NHS 10 Camso SKS 732 10 30.6 29 8.954.8431 Camso SKS 753 12 31.1 37 8.1024.8833 / 8.1024.8835 Camso SKS 775 13 30.7 48 8.957.8437  |      |                   |      |                  |      |      |    |                             |
| 10  |      |                   |      |                  |      |      |    | -                           |
| Camso SKS 775 13 30.7 48 8.957.8437   |      |                   | 10   |                  |      |      |    |                             |
|   |      |                   |      | Camso SKS 753    | 12   | 31.1 | 37 | 8.1024.8833 / 8.1024.8835   |
| Camso SKS 332 11 32.2 23 8.654.6768   |      |                   | _    | Camso SKS 775    | 13   | 30.7 | 48 | 8.957.8437                  |
|   |      |                   |      | Camso SKS 332    | 11   | 32.2 | 23 | 8.654.6768                  |

| NAME   PAGE   O.D.   0.74D   32-00   1.00    |                 |                            |           |                 |      |      |                               |                           |
|--|-----------------|----------------------------|-----------|-----------------|------|------|-------------------------------|---------------------------|
| 12-10.5 NHS  | RIM<br>DIAMETER | TIRE SIZE                  | PR/<br>SR | PRODUCT<br>NAME | PAGE | O.D. | O.T.D.<br>[32 <sup>nd</sup> ] | PID                       |
| 14.5 NHS  12.16.5 NHS  14.   |                 |                            | _         | Camso BHL 753   | 20   | 32.6 | 23                            | 2.910.8058                |
| 14.16.5 NMS  16.5  16.5  17.5  18.6.5 SARPH SARP |                 |                            | -         |                 | 12   |      |                               | 8.189.1035                |
| 16.5  16.5   Cambo SKS 732   10   32.5   33   8.898.9433   8.898.9433   16.1025.8891   6.1025.8991   |                 |                            | _         | Camso SKS 332   | 11   | *    | *                             | 8.1309.11049              |
| 18.5   Cambo SKS 775   12   33.0   37   8.1025 8393 / 8.   |                 | 12-16.5 NHS                | 12        |                 |      |      |                               |                           |
| 16.5   |                 |                            | -         |                 |      |      |                               |                           |
| 16,5   |                 |                            | -         |                 |      |      |                               |                           |
| Part   | 16.5            |                            | 1/        |                 |      |      |                               |                           |
| 26x12-16.5   10  | -               |                            | 14        |                 |      |      |                               |                           |
| 31.5x13.00-16.5 NHS  |                 | 26x12-16.5                 | 10        |                 | -    |      |                               |                           |
| 10.   Camso SKS 511   13   32.6   29   8.500.7923  | -               | 31 5×13 00-16 5 NHS        | 10        |                 | _    |      |                               |                           |
| 17.5   | -               | 31.3213.00-10.314113       |           |                 | 13   |      |                               |                           |
| 14   |                 | 33x15 50-16 5 NHS          | 10        |                 |      |      |                               |                           |
| 17.5   |                 | 00010.00 10.01110          | 14 -      |                 | 12   |      |                               |                           |
| 17.5   |                 |                            |           |                 |      |      |                               |                           |
| 17.5   |                 |                            | -         |                 |      |      |                               |                           |
| 10.5-18  | 17.5            | 14-17.5 NHS                | 14        |                 |      |      |                               |                           |
| 10.5-18  |                 |                            | -         | Camso SKS 753   | 12   | 37.4 | 50                            | 8.1027.8849               |
| 12.075-18 IMP  |                 |                            | -         | Camso SKS 775   | 13   | 36.6 | 52                            | 8.1263.10870              |
| 12.5-18  |                 | 10.5-18                    | 10        | Camso 4L I3     | _    | 35.3 | 34                            | 14.234.7956               |
| 12.5-18  |                 | 12.0/75-18 IMP             | 12        | Camso MPT 552   | 29   | 36.0 | 25                            | 2.1076.9043               |
| 18   |                 | 40.5.40                    | 12        | Camso 4L I3     | -    | 39.2 | 28                            | 14.230.7954               |
| 18   |                 | 12.5-18                    | 16        | Camso 4L I3     | -    | 39.5 | 31                            | 14.1056.8961              |
| 18   |                 |                            |           | Camso BHL 532   | 19   | 39.0 | 30                            | 2.1240.10783              |
| Camso BHL 753   20   39.2   29   2.911.8060  |                 | 12 E /00 10 IMD            | 10        | Camso BHL 732   | 18   | 38.4 | 30                            | 2.1241.10787              |
| Camso IM R1  | 10              | 12.5/80-18 IMP             | 12 -      | Camso BHL 753   | 20   | 39.2 | 29                            | 2.911.8060                |
| 320/80R18 (12.5/80R18) IND   | 10              |                            |           | Camso TM R1     | -    | 39.1 | 37                            | 2.1248.10824 / 2.524.6664 |
| 335/80R18  | _               | 280/80-18 (10.5/80-18) IND | -         | Camso MPT 732   | 28   | 35.4 | 21                            | 14.1215.9681              |
| 340/80-18 (12.5-18) IND   -   Camso MPT 732   28   39.4   28   14.1216.9685     340/80-18 IND   -   Camso MPT 753   29   39.6   26   14.1016.8779     405/70R18   -   Camso MPT 553R   32   40.1   21   14.1184.9544     19.5   15-19.5 NHS   14   Camso Hauler SKS   -   40.2   35   8.206.994 / 8.206.6542     18-19.5   16   Camso MR 1   30   44.6   39   14.1199.9610     Camso TM R4   30   44.9   35   14.1198.9606     14   Camso WEX 552   35   41.9   26   4.901.8071     Camso WEX 552   45   41.9   26   4.874.8072     16   Camso WEX 552   45   41.9   26   4.1260.10858     17   Camso WEX 553   35   39.6   44   9.115.10037     10.00-20   -   Camso WEX 583S   35   39.6   44   9.115.10037     -   Camso WEX 583S   35   39.6   44   9.115.6699     -   Camso WEX 583S   35   39.6   44   9.1124.5681     -   Solideal Magnum   52   40.9   49   9.121.13193     10.5-20   10   Camso 4L I3   -   37.4   28   14.235.2499     11.00-20 NHS   16   Camso WIL 34   43.3   30   4.138.7996     11.00-20 NHS   16   Camso WIP 576   38   41.5   21   3.132.645     11.00-20 NHS   18   Camso CMP 576   38   41.7   21   3.133.647     12.00-20   -   Camso WEX 583S   35   42.8   48   9.129.14025 / 9.1555.17812     12.00-20   12   Camso WEX 583S   35   42.8   48   9.133.8546 / 9.1555.17812     12.5-20   12   Camso WIL 33   -   43.6   34   14.239.7960     12.5-20   12   Camso WIL 33   -   43.6   34   14.239.7960     14.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     14.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     14.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     14.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     14.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     14.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     14.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     15.5-20   15   Camso 4L I3   -   43.6   34   14.239.7960     15.5-20   15   Camso 4L I3   -   43.6   34   14.239.7960     15.5-20   14   Camso 4L I3   -   43.6   34   14.239.7960     15.5-20   15   Camso 4L I3   -   43.6   3   | _               | 320/80R18 (12.5/80R18) IND | -         | Camso MPT 732   | 28   | 38.3 | 33                            | 14.1221.9705              |
| 340/80-18 IND  | _               | 335/80R18                  | _         | Camso MPT 553R  | 32   | 38.9 | 21                            | 14.1183.9542              |
| 19.5   15-19.5 NHS   | _               | 340/80-18 (12.5-18) IND    | -         | Camso MPT 732   | 28   | 39.4 | 28                            | 14.1216.9685              |
| 19.5   | _               | 340/80-18 IND              | -         | Camso MPT 753   |      | 39.6 | 26                            | 14.1016.8779              |
| 18-19.5   16   |                 |                            | -         |                 | 32   |      |                               |                           |
| 18-19.5  | 19.5            | 15-19.5 NHS                | 14        |                 |      |      |                               |                           |
| 14   |                 | 18-19.5                    | 16 -      |                 |      |      |                               |                           |
| Camso WEX 552   45   41.9   26   4.874.8072  | -               |                            |           |                 |      |      |                               |                           |
| 10.00-20    Table   Camso WEX 752   34   41.9   26   4.1260.10858  |                 | 10.00-20                   | 14        |                 |      |      |                               |                           |
| Tame   |                 |                            |           |                 |      |      |                               |                           |
| 10.00-20   |                 |                            |           |                 |      |      |                               |                           |
| Camso WEX 583S   35   39.6   44   9.119.5679   |                 |                            |           |                 |      |      |                               |                           |
| Camso WEX 583S   35   39.6   44   9.124.5681   |                 |                            |           |                 |      |      |                               |                           |
| Page   |                 |                            |           |                 |      |      |                               |                           |
| Texas   Texa   |                 |                            |           |                 |      |      |                               |                           |
| 10.5-20 10 Camso 4L I3 - 37.4 28 14.235.2499  11.00-20 16 Camso WL 34 43.3 30 4.138.7996  - Solideal Magnum 52 41.7 38 9.555.13574  11.00-20 NHS 16 Camso CMP 576 38 41.5 21 3.132.645  18 Camso CMP 576 38 41.7 21 3.133.647  - Camso WEX 583S 35 42.8 48 9.129.14025 / 9.1555.17812  12.00-20 - Camso WEX 583S 35 42.8 48 9.133.8546 / 9.1555.17812  - Solideal Magnum 52 43.0 47 9.135.10149  12.5-20 12 Camso 4L I3 - 41.5 29 14.236.7958 / 14.236.6554  14.5-20 14 Camso 4L I3 - 43.6 34 14.239.7960  | 20 -            |                            |           |                 |      |      |                               |                           |
| 11.00-20       16       Camso WL       34       43.3       30       4.138.7996         11.00-20 NHS       16       Camso CMP 576       38       41.5       21       3.132.645         18       Camso CMP 576       38       41.7       21       3.133.647         2       Camso WEX 583S       35       42.8       48       9.129.14025 / 9.1555.17812         12.00-20       -       Camso WEX 583S       35       42.8       48       9.133.8546 / 9.1555.17812         -       Solideal Magnum       52       43.0       47       9.135.10149         12.5-20       12       Camso 4L I3       -       41.5       29       14.236.7958 / 14.236.6554         14.5-20       14       Camso 4L I3       -       43.6       34       14.239.7960   |                 | 10.5-20                    |           | <del>-</del>    |      |      |                               |                           |
| 11.00-20   |                 | 1010 20                    |           |                 |      |      |                               |                           |
| 11.00-20 NHS       16       Camso CMP 576       38       41.5       21       3.132.645         18       Camso CMP 576       38       41.7       21       3.133.647         12.00-20       —       Camso WEX 583S       35       42.8       48       9.129.14025 / 9.1555.17812         —       Camso WEX 583S       35       42.8       48       9.133.8546 / 9.1555.17812         —       Solideal Magnum       52       43.0       47       9.135.10149         12.5-20       12       Camso 4L I3       —       41.5       29       14.236.7958 / 14.236.6554         14.5-20       14       Camso 4L I3       —       43.6       34       14.239.7960  |                 | 11.00-20                   |           |                 |      |      |                               |                           |
| 11.00-20 NHS     18     Camso CMP 576     38     41.7     21     3.133.647       12.00-20     — Camso WEX 583S     35     42.8     48     9.132.8546 / 9.1555.17812       -     Solideal Magnum     52     43.0     47     9.135.10149       12.5-20     12     Camso 4L I3     —     41.5     29     14.236.7958 / 14.236.6554       14.5-20     14     Camso 4L I3     —     43.6     34     14.239.7960   |                 | 11.00-20 NHS               |           |                 |      |      |                               |                           |
| 12.00-20     -     Camso WEX 583S     35     42.8     48     9.133.8546 / 9.1555.17812       -     Solideal Magnum     52     43.0     47     9.135.10149       12.5-20     12     Camso 4L I3     -     41.5     29     14.236.7958 / 14.236.6554       14.5-20     14     Camso 4L I3     -     43.6     34     14.239.7960  | _               |                            | 18        | Camso CMP 576   |      | 41.7 | 21                            |                           |
| 12.00-20     -     Camso WEX 583S     35     42.8     48     9.133.8546 / 9.1555.17812       -     Solideal Magnum     52     43.0     47     9.135.10149       12.5-20     12     Camso 4L I3     -     41.5     29     14.236.7958 / 14.236.6554       14.5-20     14     Camso 4L I3     -     43.6     34     14.239.7960  |                 | 12.00-20                   | -         |                 |      |      | 48                            |                           |
| 12.5-20 12 Camso 4L I3 - 41.5 29 14.236.7958 / 14.236.6554 14.5-20 14 Camso 4L I3 - 43.6 34 14.239.7960  |                 |                            | -         | Camso WEX 583S  |      | 42.8 | 48                            |                           |
| 14.5-20 14 Camso 4L I3 – 43.6 34 14.239.7960   |                 |                            | -         | Solideal Magnum | 52   | 43.0 | 47                            | 9.135.10149               |
|  |                 | 12.5-20                    | 12        | Camso 4L I3     | _    | 41.5 | 29                            | 14.236.7958 / 14.236.6554 |
| 290/90-20 18 Camso WEX 752 34 41.6 31 4.1245.10803   |                 | 14.5-20                    | 14        | Camso 4L I3     | -    | 43.6 | 34                            | 14.239.7960               |
|  |                 | 290/90-20                  | 18        | Camso WEX 752   | 34   | 41.6 | 31                            | 4.1245.10803              |

# **TECHNICAL DATA | TIRES**

|                 | IUAL DAIA       |           |                                |      |              |                               |                              |  |
|-----------------|-----------------|-----------|--------------------------------|------|--------------|-------------------------------|------------------------------|--|
| RIM<br>DIAMETER | TIRE SIZE       | PR/<br>SR | PRODUCT<br>NAME                | PAGE | O.D.         | O.T.D.<br>[32 <sup>nd</sup> ] | PID                          |  |
|                 |                 | _         | Camso SKS 782S                 | 14   | 30.7         | 42                            | 9.550.8595 / 9.549.8591      |  |
|                 |                 | -         | Camso SKS 786S                 | 16   | 30.7         | -                             | 9.470.8400                   |  |
|                 | 31x10-20        | -         | Camso SKS 792S                 | 14   | 30.7         | 42                            | 9.794.12197 / 9.793.12195    |  |
|                 |                 | -         | Camso SKS 793S                 | 15   | 30.7         | 49                            | 9.1297.14967                 |  |
|                 |                 | -         | Camso SKS 796S                 | 16   | 30.7         | -                             | 9.795.12189                  |  |
|                 | 335/80R20       | -         | Camso MPT 553R                 | 32   | 40.8         | 21                            | 14.1122.9297                 |  |
|                 |                 | -         | Camso SKS 782S                 | 14   | 32.7         | 50                            | 9.552.8603 / 9.551.8599      |  |
|                 |                 | -         | Camso SKS 786S                 | 16   | 32.7         | -                             | 9.475.8411                   |  |
|                 | 33x12-20        | _         | Camso SKS 792S                 | 14   | 32.7         | 50                            | 9.809.12624 / 9.796.12199    |  |
|                 |                 | _         | Camso SKS 793S                 | 15   | 32.7         | 54                            | 9.1296.14965                 |  |
|                 |                 | _         | Camso SKS 796S                 | 16   | 32.7         | -                             | 9.798.12191                  |  |
|                 | 340/80-20 IND   | _         | Camso MPT 753                  | 29   | 42.0         | 31                            | 14.1017.8783                 |  |
|                 | 365/80R20       | _         | Camso MPT 553R                 | 32   | 42.7         | 25                            | 14.1182.9540                 |  |
|                 |                 | -         | Camso SKS 782S                 | 14   | 35.8         | 54                            | 9.554.8611 / 9.553.8607      |  |
|                 |                 | -         | Camso SKS 786S                 | 16   | 35.8         | -                             | 9.480.8423                   |  |
|                 | 36x14-20        | -         | Camso SKS 792S                 | 14   | 35.8         | 54                            | 9.800.12205 / 9.799.12203    |  |
|                 |                 | -         | Camso SKS 793S                 | 15   | 35.8         | 66                            | 9.1298.14969                 |  |
|                 |                 | _         | Camso SKS 796S                 | 16   | 35.8         | -                             | 9.801.12193                  |  |
|                 | 385/70-20       | _         | Camso MPT 793S                 | 31   | 41.0         | 68                            | 9.1510.16377                 |  |
|                 | 400/70-20 IND   | _         | Camso MPT 732                  | 28   | 41.9         | 39                            | 14.1217.9689                 |  |
|                 | 400/70-20 1110  | -         | Camso MPT 753                  | 29   | 43.3         | 34                            | 14.1018.8787 / 14.1018.10963 |  |
|                 |                 |           | Camso 4L I3                    | -    | 42.6         | 33                            | 14.252.7962                  |  |
|                 |                 | 14        | Camso 4L R1                    | 30   | 43.2         | 43                            |                              |  |
|                 | 405/70-20       |           | Camso TM R4                    | 30   | 42.7         | 34                            |                              |  |
|                 | 400/70 20       |           | Camso 4L I3                    | -    |              | -                             | 14.578.5506                  |  |
|                 |                 | 16        | Camso 4L R1                    | 30   | _            | -                             | 14.983.8584                  |  |
|                 |                 |           | Camso TM R4                    | 30   | 43.1         | 40                            | 14.948.8399                  |  |
|                 | 405/70R20       | -         | Camso MPT 553R                 | 32   | 42.1         | 23                            | 14.1121.9295                 |  |
|                 | 500/45-20 IND   | _         | Camso WEX 732                  | 36   | 38.7         | 37                            | 4.1157.9373                  |  |
|                 |                 | _         | Camso WEX 552                  | 35   | 38.3         | 26                            | 4.1028.8859                  |  |
|                 | 8.25-20         | 14        | Camso WEX 752                  | 34   | 38.6         | 21                            | 4.1261.10862                 |  |
|                 |                 |           | Camso WL                       | 34   | 39.4         | 33                            | 4.137.7994                   |  |
|                 |                 |           | Camso WEX 552                  | 35   | 40.2         | 25                            | 4.878.7856                   |  |
|                 |                 | 14        | Camso WL                       | 34   | 40.9         | 34                            | 4.135.7992                   |  |
|                 | 9.00-20         |           | Camso WEX 752                  | 34   | 40.6         | 25                            | 4.1262.10866                 |  |
|                 |                 | 18        | Camso WEX 752                  | 34   | 40.4         | 25                            | 4.1356.11207                 |  |
|                 |                 |           | Camso WEX 583S                 | 35   | 38.3         | 50                            | 9.111.9849                   |  |
|                 | 315/80-22.5     | _         | Camso WEX 553                  | 36   | 43.5         | 38                            | 4.1247.10811                 |  |
| 22.5            | 385/65-22.5 NHS | 16        | Camso Hauler SKS               |      | 43.0         | 35                            | 8.232.8044 / 8.232.6552      |  |
|                 | 500/60-22.5 IMP | 16        | Camso DMP 532                  |      | 45.9         | 44                            | 5.1228.9727                  |  |
|                 | 18-22.5         | 16        | Camso 4L R1                    | 30   | 47.4*        | 43*                           | 14.365.9598                  |  |
| 23              |                 |           | Camso TM R4                    | 30   | 47.8         | 39                            | 14.1197.9602                 |  |
|                 | 315/70-22.5     |           | Camso WEX 553                  | 36   | 40.6         | 25                            | 4.1246.10807                 |  |
|                 |                 | 0.4       | Camso WEX 553                  | 36   | 43.5         | 38                            | 4.1385.11249                 |  |
|                 | 12.00-24        | 24        | Camso MST 776                  | 52   | 50.2         | 71                            | 13.1013.8745                 |  |
| 24              |                 | _         | Camso WEX 583S                 | 35   | 46.4         | 42                            | 9.139.9233                   |  |
|                 |                 | 10        | Camso TLH 732                  | 22   | 50.9         | 29                            | 6.986.8617                   |  |
|                 | 13.00-24        | 12        | Camso TLH 753                  | 23   | 51.0         | 29                            | 6.985.8613                   |  |
|                 |                 | 16 -      | Camso TLH 753                  | 23   | 50.5         | 29                            | 6.985.8613                   |  |
|                 |                 |           | Camso TLH 732                  | 22   | 50.8         | 30                            | 6.989.8625                   |  |
|                 |                 |           | Camso TLH 753                  | 23   | 50.5         | 31                            | 6.988.8621                   |  |
|                 |                 |           | Camso TLH 592S                 | 26   | 49.6         | 64                            | 9.1575.17916                 |  |
|                 | 13.00-24 TG     |           | Camso TLH 792S                 | 26   | 50.8         | 88                            | 9.1088.13697 / 9.1523.16790  |  |
|                 |                 | 12        | Camso TLH 532<br>Camso TLH 532 | 23   | 49.2<br>49.7 | 26<br>26                      | 6.891.7888<br>6.891.7888     |  |
|                 |                 | 12        | Camso TLH 732+                 | 23   | 49.7         | _                             | 6.1291.10987                 |  |
|                 |                 | 16        | Camso TLH 732+                 | 22   |              | _                             | 6.1291.10987                 |  |
|                 |                 | 10        | Gailleo ILII / 32T             | - 22 |              | _                             | 0.1293.10991                 |  |

| RIM<br>DIAMETER | TIRE SIZE                | PR/<br>SR | PRODUCT<br>NAME             | PAGE | O.D.         | O.T.D.<br>[32 <sup>nd</sup> ] | PID                          |
|-----------------|--------------------------|-----------|-----------------------------|------|--------------|-------------------------------|------------------------------|
|                 |                          |           | Camso TLH 732               |      | 53.0         | 31                            | 6.991.8633                   |
|                 |                          | 12        | Camso TLH 753               | 23   | 52.9         | 31                            | 6.990.8629                   |
|                 |                          |           | Camso TLH 753               | 23   | 53.3         | 31                            | 6.990.8629                   |
|                 | 14.00-24                 | 16        | Camso TLH 732               |      | 53.3         | 33                            | 6.994.8641                   |
|                 | 14.00 24                 |           | Camso TLH 753               | 23   | 53.3         | 33                            | 6.993.8637                   |
|                 |                          |           | Camso TLH 592S              | 26   | 51.8         | 77                            | 9.1573.17912                 |
|                 |                          | -         | Camso TLH 792S              | 26   | 52.4         | 111                           | 9.1144.14049 / 9.1521.16786  |
|                 |                          |           | Camso WEX 583S              | 35   | 52.4         | 37                            | 9.140.12181                  |
|                 |                          | 12        | Camso TLH 532               | 23   | 52.1         | 28                            | 6.894.7902                   |
|                 | 14.00-24 TG              |           | Camso TLH 732+              | 22   | *            | *                             | 6.1295.10995                 |
|                 |                          | 16        | Camso TLH 732+              | 22   | *            | *                             | 6.1297.10999                 |
|                 | 14.00R24                 | *         | Camso GRD 533R              | 47   | 53.4         | 34                            | 6.1120.9293                  |
|                 | 14.9-24 IND              | 12        | Camso BHL 532               | 19   | 48.5         | 28                            | 2.621.6135                   |
|                 |                          |           | Camso SL R4                 | 19   | 48.5         | 37                            | 2.260.2710                   |
|                 | 15.5/80-24 IMP           | 14        | Camso 4L R1                 | 30   | 50.5         | 50                            | 14.393.7966 / 14.393.8269    |
|                 | 40.00.07                 | 16        | Camso 4L R1                 | 30   | 50.5         | 50                            | 14.507.4517                  |
|                 | 16.00-24                 | 16        | Camso GRD 732               | 48   | 58.8         | 42                            | 6.1127.9307                  |
|                 | 16.5/85-24 IMP           | 8         | Camso 4L R1                 | 30   | 52.4         | 31                            | 14.511.7970                  |
|                 |                          | 14        | Camso 4L R1                 | 30   | 52.2         | 32                            | 14.506.7968                  |
|                 | 16.9-24 IND              | 12        | Camso BHL 532               | 19   | 51.0         | 29                            | 2.622.6136                   |
|                 |                          |           | Camso SL R4                 | 19   | 51.3         | 29                            | 2.107.7982                   |
|                 | 475L 07 IND              | 10        | Camso BHL 532               | 19   | 49.1         | 30                            | 2.620.6134                   |
| 24              | 17.5L-24 IND             | 10        | Camso SL R4                 | 19   | 49.9         | 34                            | 2.103.570                    |
| 24              |                          | 12        | Camso SL R4                 | 19   | 49.2         | 40                            | 2.456.4293 / 2.456.7352      |
|                 | 19.5L-24 IND             | 10        | Camso BHL 532               | 19   | 51.9         | 33                            | 2.725.7217                   |
|                 |                          | 12        | Camso BHL 732               | 20   | 52.3<br>E1.E | 31                            | 2.1243.10795                 |
|                 |                          |           | Camso BHL 753 Camso BHL 532 | 19   | 51.5<br>54.1 | 33                            | 2.914.8066                   |
|                 | 21L-24 IND               | 12        | Camso BHL 732               | 18   | 54.4         | 48                            | 2.1244.10799                 |
|                 | 375/85-24                |           | Camso MPT 793S              | 31   | 49.0         | 76                            | 9.1525.16618                 |
|                 | 400/70-24 IND            |           | Camso MPT 753               | 29   | 46.7         | 37                            | 14.1019.8791 / 14.1019.10965 |
|                 | 400/70R24 IND            | _         | Camso MPT 532R              | 32   | 45.4         | 33                            | 14.1124.9301                 |
|                 | 400/701124 1112          | _         | Camso MPT 753               | 29   | 49.0         | 42                            | 14.1020.8795 / 14.1020.10967 |
|                 | 400/80-24 IND            | _         | Camso TM R4                 | 30   | 49.0         | 43                            | 14.897.8157                  |
|                 | 400/80R24 IND            | _         | Camso MPT 532R              | 32   | 48.8         | 39                            | 14.1156.9369                 |
|                 |                          | 14        | Camso 4L I3                 |      | 46.8         | 34                            | 14.253.7964                  |
|                 | 405/70-24                |           | Camso 4L I3                 |      |              |                               | 14.980.8574                  |
|                 |                          | 16        | Camso 4L R1                 | 30   | 47.2         | 33                            | 14.981.8578                  |
|                 | 440/80-24 (16.9-24) IND  | _         | Camso MPT 732               | 28   | 51.8         | 33                            | 14.1232.10749                |
|                 | 440/80-24 IND            | _         | Camso TM R4                 | 30   | 52.3         | 43                            | 14.945.8373                  |
|                 | 440/80R24 IND            | -         | Camso MPT 532R              | 32   | 51.2         | 38                            | 14.1129.9311                 |
|                 |                          |           | Camso 4L R1                 | 30   | 48.9         | 33                            | 2.1200.9614                  |
|                 | 460/70-24 IND            | -         | Camso MPT 753               | 29   | 49.3         | 43                            | 14.1015.8775                 |
|                 |                          |           | Camso TM R4                 | 30   | 49.8         | 43                            | 14.1002.8689                 |
|                 | 460/70R24 IND            | -         | Camso MPT 532R              | 32   | 48.7         | 38                            | 14.1125.9303                 |
|                 | 500/70R24 (19.5LR24) IND | -         | Camso MPT 732               | 28   | 52.3         | 31                            | 14.1218.9693                 |
|                 | 500/70R24 IND            | -         | Camso MPT 532R              | 32   | 51.0         | 40                            | 14.1126.9305                 |
|                 | 14.00-25                 | 12        | Camso MPT 773               | _    | 54.0         | 38                            | 14.1192.9584                 |
|                 | 14.00-23                 | 20        | Camso MPT 773               | -    | 53.7         | 38                            | 14.1193.9588                 |
|                 |                          | 12        | Camso LM L2                 | 49   | 50.5         | 33                            | 13.421.8057                  |
|                 |                          | 12        | Camso LM L3                 | 49   | 50.5         | 34                            | 13.420.8056 / 13.420.7619    |
| 25              | 15.5-25                  |           | Camso LM L2                 | 49   | 50.4         | 33                            | 13.521.4944                  |
|                 |                          | 16        | Camso LM L2                 | 49   | 50.4         | 33                            | 13.521.4944                  |
|                 |                          |           | Camso LM L3                 | 49   | 50.2         | 34                            | 13.551.7952                  |
|                 | 15.5R25                  | *         | Camso MPT 553R              | 32   | 50.0         | 29                            | 13.1225.9721                 |
|                 |                          | **        | Camso MPT 553R              | 32   | 50.0         | 29                            | 13.1225.9721                 |
|                 | 16.00-25                 | _         | Solideal Magnum             | 52   | 58.2         | 77                            | 9.422.16708                  |

# **TECHNICAL DATA | TIRES**

| TEGITITIONE DATA |           |           |                               |      |              |                               |                              |  |  |
|------------------|-----------|-----------|-------------------------------|------|--------------|-------------------------------|------------------------------|--|--|
| RIM<br>DIAMETER  | TIRE SIZE | PR/<br>SR | PRODUCT<br>NAME               | PAGE | O.D.         | O.T.D.<br>[32 <sup>nd</sup> ] | PID                          |  |  |
|                  |           | 10        | Camso LM L2                   | 49   | 53.4         | 33                            | 13.423.3849                  |  |  |
|                  |           | 12        | Camso LM L3                   | 49   | 54.7         | 34                            | 13.422.4657                  |  |  |
|                  |           |           | Camso LM L2                   | 49   | 52.9         | 33                            | 13.490.4315                  |  |  |
|                  | 17.5-25   | 16        | Camso LM L3                   | 49   | 54.8         | 33                            | 13.489.4665                  |  |  |
|                  | 17.5-25   | 10        | Camso WHL 773                 | 51   | 53.3         | 34                            | 13.971.8541                  |  |  |
|                  |           |           | Camso WHL 775                 | 51   | 55.2         | 78                            | 13.961.8461                  |  |  |
|                  |           | 20        | Camso LM L3                   | 49   | 53.7         | 35                            | 13.541.5228                  |  |  |
|                  |           | 24        | Camso LM L2                   | 49   | 53.4         | 33                            | 13.1014.8765                 |  |  |
|                  |           |           | Camso EMT 538R                | 47   | 53.0         | 34                            | 13.1194.9592                 |  |  |
|                  |           | *         | Camso WHL 553R                | 44   | 53.0         | 31                            | 13.1282.10953                |  |  |
|                  |           |           | Camso WHL 753R                | 42   | 53.1         | 35                            | 13.680.7090                  |  |  |
|                  | 17.5R25   |           | Camso EMT 538R                | 47   | 53.0         | 34                            | 13.1194.9592                 |  |  |
|                  |           | **        | Camso WHL 553R                | 44   | 53.0         | 31                            | 13.1282.10953                |  |  |
|                  |           |           | Camso WHL 753R                | 42   | 53.1         | 35                            | 13.680.7090                  |  |  |
|                  |           |           | Camso WHL 776R                | 45   | 55.2         | 94                            | 13.879.7860                  |  |  |
|                  |           | 16        | Camso LM L2                   | 49   | 58.9         | 38                            | 13.425.7950                  |  |  |
|                  |           |           | Camso LM L3                   | 49   | 59.2         | 40                            | 13.424.4874                  |  |  |
|                  | 20.5-25   |           | Camso LM L3                   | 49   | 59.3         | 38                            | 13.491.4904                  |  |  |
|                  |           | 20        | Camso WHL 773                 | 51   | 58.6         | 35                            | 13.972.8545                  |  |  |
|                  |           |           | Camso WHL 775                 | 51   | 61.5         | 97                            | 13.962.8465                  |  |  |
|                  |           |           | Camso EMT 538R                | 47   | 59.1         | 38                            | 13.1195.9594                 |  |  |
|                  |           |           | Camso EMT 538R                | 47   | 59.1         | 37                            | 13.1195.9594                 |  |  |
|                  |           | *         | Camso WHL 553R                | 44   | 59.3         | 39                            | 13.1283.10955                |  |  |
|                  | 00 5005   |           | Camso WHL 753R                | 42   | 58.4         | 39                            | 13.681.7092                  |  |  |
|                  | 20.5R25   |           | Camso WHL 775R                | 45   | 60.8         | 93                            | 13.881.7864                  |  |  |
|                  |           |           | Camso EMT 538R                | 47   | 59.1         | 38                            | 13.1195.9594                 |  |  |
|                  |           | **        | Camso WHL 553R Camso WHL 753R | 44   | 59.3<br>58.4 | 39                            | 13.1283.10955<br>13.681.7092 |  |  |
| 25               |           |           | Camso WHL 775R                | 45   | 60.8         | 93                            | 13.881.7864                  |  |  |
| 23               |           |           | Camso LM L3                   | 49   | 63.6         | 47                            | 13.427.4913                  |  |  |
|                  |           | 20        | Camso WHL 773                 | 51   | 63.5         | 42                            | 13.973.8549                  |  |  |
|                  | 23.5-25   |           | Camso WHL 775                 | 51   | 65.7         | 111                           | 13.963.8469                  |  |  |
|                  |           |           | Camso LM L3                   | 49   | 64.2         | 47                            | 13.493.4902                  |  |  |
|                  |           | 24        | Camso WHL 773                 | 51   | 63.5         | 42                            | 13.974.8553                  |  |  |
|                  |           |           | Camso EMT 538R                | 47   | 63.1         | 42                            | 13.1196.9596                 |  |  |
|                  |           | *         | Camso WHL 553R                | 44   | 63.5         | 43                            | 113.1284.10957               |  |  |
|                  |           |           | Camso WHL 753R                | 42   | 63.5         | 44                            | 13.682.7094                  |  |  |
|                  |           |           | Camso EMT 538R                | 47   | 63.1         | 42                            | 13.1196.9596                 |  |  |
|                  | 23.5R25   |           | Camso WHL 553R                | 44   | 63.5         | 43                            | 113.1284.10957               |  |  |
|                  |           | **        | Camso WHL 753R                | 42   | 63.5         | 44                            | 13.682.7094                  |  |  |
|                  |           |           | Camso WHL 775R                | 45   | 65.9         | 101                           | 13.882.7866                  |  |  |
|                  |           |           | Camso WHL 776R                | 45   | 65.9         | 101                           | 13.883.7868                  |  |  |
|                  |           | 20        | Camso LM L3                   | 49   | 69.0         | 50                            | 13.428.4914                  |  |  |
|                  | 26.5-25   |           | Camso LM L3                   | 49   | 68.8         | 50                            | 13.495.4920                  |  |  |
|                  | 20.3-23   | 28        | Camso WHL 773                 | 51   | 68.7         | 47                            | 13.975.8557                  |  |  |
|                  |           |           | Camso WHL 775                 | 51   | 70.8         | 116                           | 13.964.8473                  |  |  |
|                  |           | *         | Camso WHL 553R                | 44   | 68.5         | 44                            | 13.1285.10959                |  |  |
|                  |           |           | Camso WHL 753R                | 42   | 68.7         | 48                            | 13.684.7098                  |  |  |
|                  | 26.5R25   |           | Camso WHL 553R                | 44   | 68.5         | 44                            | 13.1285.10959                |  |  |
|                  |           | **        | Camso WHL 753R                | 42   | 68.7         | 48                            | 13.684.7098                  |  |  |
|                  |           |           | Camso WHL 775R                | 45   | 70.5         | 108                           | 13.885.7872                  |  |  |
|                  |           |           | Camso WHL 776R                | 45   | 70.3         | 108                           | 13.886.7874                  |  |  |
|                  | 29.5-25   | 28        | Camso LM L3                   | 49   | 73.7         | 45                            | 13.666.6942                  |  |  |
|                  |           | *         | Camso WHL 753R                | 42   | 73.6         | 50                            | 13.686.7102                  |  |  |
|                  | 29.5R25   | **        | Camso WHL 553R                | 44   | 73.1         | 49                            | 13.1286.10961                |  |  |
|                  |           | **        | Camso WHL 775R                | 42   | 73.6         | 50                            | 13.686.7102                  |  |  |
|                  |           |           | Camso WHL 775R                | 45   | 75.4         | 116                           | 13.887.7876                  |  |  |

| RIM<br>DIAMETER | TIRE SIZE               | PR/<br>SR | PRODUCT<br>NAME  | PAGE | O.D. | O.T.D.<br>[32 <sup>nd</sup> ] | PID                     |
|-----------------|-------------------------|-----------|------------------|------|------|-------------------------------|-------------------------|
|                 | 600/65R25               | *         | Camso EMT 553R   | 47   | 55.5 | 45                            | 13.1151.9357            |
| 25              | 650/65R25               | */**      | Camso EMT 553R   | 47   | 58.3 | 50                            | 13.1152.9359            |
|                 | 750/65R25               | **        | Camso EMT 553R   | 47   | 62.7 | 50                            | 13.1154.9363            |
|                 |                         |           | Camso 4L R1      | 30   | 55.7 | 42                            | 2.337.8610              |
|                 | 18.4-26 IND             | 12        | Camso BHL 532    | 19   | 57.1 | 31                            | 2.625.6139              |
| 26 -            |                         |           | Camso BHL 753    | 20   | 56.2 | 31                            | 2.913.8064              |
| 20              | 23.1-26 IND             | 12        | Camso CMP 533    | 38   | 62.7 | 34                            | 3.949.8451              |
|                 | 480/80-26 (18.4-26) IND | -         | Camso MPT 732    | 28   | 56.7 | 37                            | 14.1219.9697            |
|                 | 480/80R26 IND           | -         | Camso MPT 532R   | 32   | 55.7 | 42                            | 14.1130.9313            |
|                 |                         |           | Camso BHL 532    | 19   | 55.8 | 35                            | 2.626.6140              |
|                 | 16.9-28 IND             | 12        | Camso BHL 732    | 18   | 56.1 | 44                            | 2.1242.10791            |
|                 |                         |           | Camso BHL 753    | 20   | 55.1 | 35                            | 2.912.8062              |
| _               | 18.4-28 IND             | 12        | Camso SL R4      | 19   | 58.6 | 49                            | 2.118.602               |
| _               | 070/75 00               | 14        | Camso TLH 753    | 23   | 50.2 | 42                            | 14.995.8645             |
|                 | 370/75-28               | 18        | Camso TLH 753    | 23   | 50.2 | 42                            | 14.1167.9497            |
| 28              | 385/45-28               | 18        | Camso Hauler SKS | -    | 43.0 | 32                            | 8.670.8050 / 8.670.8115 |
|                 | /00/7E 20               | 16        | Camso TLH 753    | 23   | 51.2 | 45                            | 14.996.8649             |
|                 | 400/75-28               | 16        | Camso TLH 753    | 23   | 51.2 | 45                            | 14.995.8645             |
|                 | 400/75-28               | 18        | Camso TLH 753    | 23   | 51.6 | 45                            | 14.1168.9499            |
|                 | 440/80-28 (16.9R28)     | -         | Camso MPT 732    | 28   | 56.3 | 44                            | 14.1220.9701            |
|                 | 440/80R28 IND           |           | Camso MPT 532R   | 32   | 55.2 | 42                            | 14.1131.9316            |
|                 | 440/80R28 IND           |           | Camso MPT 773    |      | 56.2 | 45                            | 14.1271.10911           |
| 30              | 420/80-30 IND           | -         | Camso SL R4      | 19   | 57.2 | 38                            | 2.614.6038              |
| 255             | 12x4.5 (255)            | -         | Camso AWP 583S   | 39   | 12.0 | -                             | 31.183.252              |
| 267             | 12 5/4 25 (267)         |           | Camso AWP 583S   | 39   | 12.5 |                               | 31.179.247              |
| 267             | 12.5x4.25 (267)         |           | Camso AWP 583S   | 39   | 12.5 | _                             | 31.179.248              |
| 280             | 323x100 (280)           | -         | Camso AWP 583S   | 39   | 12.7 | -                             | 38.1313.1415            |
| 318             | 15x5 (318)              | -         | Camso AWP 583S   | 39   | 15.0 | -                             | 31.181.250              |
| 320             | 15x5 (320)              | -         | Camso AWP 583S   | 39   | 15.0 | -                             | 31.180.249              |
| 354             | 406x125 (354)           | -         | Camso AWP 583S   | 39   | 16.0 | _                             | 38.1314.1416            |

The information contained in this document is for guidance purposes only.

Products may be subject to change by regions. Camso reserves the right to phase out products without notice.

 $\label{please visit} \textbf{camso.co}, \textbf{connectbeyondroad.michelingroup.com} \ \text{or consult your sale representative}.$ 

# TECHNICAL DATA | TRACKS

| WIDTH | PITCH | LINK       | PRODUCT<br>NAME | TREAD    | GUIDING | METAL PIECE<br>NAME | METAL PIECE<br>TYPE | PAGE<br>NUMBER |
|-------|-------|------------|-----------------|----------|---------|---------------------|---------------------|----------------|
|       |       | 39         |                 | НН       | В       | R                   | Standard            | 63             |
|       |       | 39         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 40         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 41         | 0 071 111/5     | ST       | J       | R                   | Rail Type           | 63             |
| 180   | 72    | 42         | Camso CTL HXD   | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 44         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 45         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 47         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 39         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 41         |                 | ST       | J       | R                   | Rail Type           | 63             |
| 230   | 72    | 42         | Camso CTL HXD   | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 44         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 45         |                 | ST       | J       | R                   | Rail Type           | 63             |
|       |       | 39         |                 | НН       | В       | R                   | Standard            | 63             |
| 250   | 72    | 52         | Camso CTL HXD   | НН       | В       | D                   | Standard            | 63             |
| 300   | 84    | 46         | Camso CTL HXD   | НН       | В       | E                   | Standard            | 63             |
|       |       | 49         |                 | НН       | В       | E                   | Standard            | 63             |
|       |       | 52         |                 | НН       | В       | E                   | Standard            | 63             |
| 320   | 86    | 53         | Camso CTL HXD   | HH       | В       | E                   | Standard            | 63             |
| 320   | 00    | 54         | Calliso CTETIAD | НН       | В       | E                   | Standard            | 63             |
|       |       | 52         |                 | НН       | J       | W                   | Rail Type           | 63             |
|       |       | 49         |                 | НН       | В       | E                   | Standard            |                |
|       |       | 50         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 52         | Camso CTL HXD   | HH       | В       | E                   | Standard            | 63             |
| /00   | 06    |            |                 |          | В       |                     |                     |                |
| 400   | 86    | 53         |                 | HH       |         | E                   | Standard            | 63             |
|       |       | 55         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 56         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 60         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 42         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 52         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 53         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 55         | 0 071 111/5     | HH       | В       | E                   | Standard            | 63             |
|       | 86    | 56         | Camso CTL HXD   | HH       | В       | E                   | Standard            | 63             |
| 450   |       | 58         |                 | HA       | В       | E                   | Standard            | 63             |
|       |       | 59         |                 | НН       | В       | E                   | Standard            | 63             |
|       |       | 60         |                 | HH       | В       | E                   | Standard            | 63             |
|       |       | 63         |                 | НН       | В       | E                   | Standard            | 63             |
|       | 100   | 48         | Camso CTL HXD   | HH       | J       | E                   | Rail Type           | 63             |
|       |       | 50         |                 | НН       | J       | Е                   | Rail Type           | 63             |
|       |       | <b>,</b> F |                 | <b>D</b> |         |                     | 0: 1 1              | 0.5            |
|       |       | 45         |                 | В        | В       | E                   | Standard            | 65             |
|       |       | 48         |                 | B        | В       | E                   | Standard            | 65             |
|       |       | 49         |                 | B        | В       | E                   | Standard            | 65             |
|       |       | 50         |                 | B        | В       | E                   | Standard            | 65             |
| 320   | 86    | 52         | Camso CTL SD    | B        | В       | E                   | Standard            | 65             |
|       |       | 53         |                 | B        | В       | E                   | Standard            | 65             |
|       |       | 56         |                 | B        | В .     | E                   | Standard            | 65             |
|       |       | 46         |                 | B        | J       | W                   | Rail Type           | 65             |
|       |       | 52         |                 | В        | J       | W                   | Rail Type           | 65             |
|       |       | 49         |                 | В        | В       | E                   | Standard            | 65             |
| 400   | 86    | 50         | Camso CTL SD    | В        | В       | E                   | Standard            | 65             |
|       |       | 52         |                 | В        | В       | E                   | Standard            | 65             |
|       |       | 53         |                 | В        | В       | Е                   | Standard            | 65             |

| WIDTH | PITCH | LINK  | PRODUCT<br>NAME                | TREAD    | GUIDING  | METAL PIECE<br>NAME | METAL PIECE<br>TYPE     | PAGE<br>NUMBER |
|-------|-------|-------|--------------------------------|----------|----------|---------------------|-------------------------|----------------|
|       |       | 54    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 55    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 56    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 58    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 52    |                                | В        | В        | E                   | Standard                | 65             |
|       | 86    | 53    | Camso CTL SD                   | В        | В        | Е                   | Standard                | 65             |
| 450   |       | 55    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 56    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 58    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 59    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 60    |                                | В        | В        | E                   | Standard                | 65             |
|       |       | 63    |                                | В        | В        | E                   | Standard                | 65             |
|       | 100   | 48    | Camso CTL SD                   | В        | J        | E                   | Rail Type               | 65             |
|       |       | 50    |                                | В        | J        | Е                   | Rail Type               | 65             |
|       |       | 00    |                                | A11      |          | 1/ 0                | 20                      |                |
|       |       | 62    |                                | AH       | <u> </u> | KA<br>KA            | 3S<br>3S                | 59<br>59       |
|       |       | 66    |                                | AH<br>AH | l<br>I   | KA                  | 3S                      | 59             |
| 230   | 48    | 68    | Camso MEX HXD                  | AH       | i        | KA                  | 35                      | 59<br>59       |
| 230   | 40    | 70    | Calliso WILX LIXD              | AH       | <u>'</u> | KA                  | 35                      | 59<br>59       |
|       |       | 70 72 | -                              | AH       | i        | KA                  | 38                      | 59<br>59       |
|       |       | 76    |                                | AH       | i        | KA                  | 38                      | 59             |
|       |       | 73    |                                | AH       | i        | SA                  | 3S / Narrow             | 59             |
|       |       | 74    |                                | AH       | ı        | SA                  | 3S / Narrow             | 59             |
|       |       | 75    |                                | AH       | ı        | WA                  | 3S / Wide               | 59             |
|       |       | 77    | -<br>-<br>-<br>Camso MEX HXD - | AH       | ı        | SA                  | 3S / Narrow             | 59             |
|       |       | 78    |                                | AH       | ı        | SA                  | 3S / Narrow             | 59             |
|       |       | 79    |                                | AH       | ı        | SA                  | 3S / Narrow             | 59             |
|       |       | 79    |                                | AH       | ı        | WA                  | 3S / Wide               | 59             |
| 300   | 55    | 81    |                                | AH       | ı        | SA                  | 3S / Narrow             | 59             |
|       |       | 81    |                                | AH       | ı        | WA                  | 3S / Wide               | 59             |
|       |       | 83    |                                | AH       | I        | SA                  | 3S / Narrow             | 59             |
|       |       | 85    |                                | AH       | ı        | SA                  | 3S / Narrow             | 59             |
|       |       | 86    |                                | AH       | ı        | WA                  | 3S / Wide               | 59             |
|       |       | 87    |                                | AH       | ı        | WA                  | 3S / Wide               | 59             |
|       |       | 88    |                                | АН       | I        | SA                  | 3S / Narrow             | 59             |
|       |       | 82    |                                | AH       | ı        | WA                  | 3S                      | 59             |
|       | 52.5  | 86    | Camso MEX HXD                  | AH       | ı        | WA                  | 3S                      | 59             |
| 350   |       | 90    |                                | AH       | I        | WA                  | 3S                      | 59             |
|       | 55    | 86    | Camso MEX HXD                  | V1       | J        | SA                  | 3S                      | 59W            |
|       | 73    | 76    | Camso MEX HXD                  | АН       | J        | EA                  | 3S / Rail Type          | 59             |
|       |       | 72    |                                | АН       | I        | EA                  | 3S / Wide               | 59             |
|       |       | 73    |                                | АН       | I        | WA                  | 3S / Narrow             | 59             |
|       |       | 74    |                                | АН       | l l      | EA                  | 3S / Wide               | 59             |
|       | 72.5  | 74    | Camso MEX HXD                  | АН       | l l      | WA                  | 3S / Narrow             | 59             |
| 400   |       | 76    |                                | АН       | l l      | EA                  | 3S / Wide               | 59             |
|       |       | 82    |                                | АН       | I        | EA                  | 3S / Wide               | 59             |
|       |       | 74    |                                | АН       | J        | EA                  | 3S / Rail Type          | 59             |
|       | 73    | 76    | Camso MEX HXD                  | АН       | J        | EA                  | 3S / Rail Type          | 59             |
|       | 75.5  | 74    | Camso MEX HXD                  | АН       | J        | WA                  | 3S / Offset / Rail Type | 59             |

## TECHNICAL DATA | TRACKS

| ILUII | IIIUAL | . DAIA | IIIVALI          | <b>/</b> U |         |                     |                         |                |
|-------|--------|--------|------------------|------------|---------|---------------------|-------------------------|----------------|
| WIDTH | PITCH  | LINK   | PRODUCT<br>NAME  | TREAD      | GUIDING | METAL PIECE<br>NAME | METAL PIECE<br>TYPE     | PAGE<br>NUMBER |
|       | 71     | 84     | Camso MEX HXD    | АН         | I       | JA                  | 3S                      | 59             |
|       |        | 86     | Calliso WEX HAD  | АН         | I       | JA                  | 3S                      | 59             |
|       |        | 74     |                  | АН         | I       | JA                  | 38                      | 59             |
|       | 76     | 80     | Camso MEX HXD    | АН         | I       | JA                  | 38                      | 59             |
|       | 70     | 82     | Calliso WEX TIXD | АН         | I       | JA                  | 38                      | 59             |
| 450   |        | 84     |                  | АН         | I       | JA                  | 3S                      | 59             |
| 400   |        | 74     |                  | АН         | I       | AA                  | 3S / Wide               | 59             |
|       |        | 76     |                  | AH         | I       | AA                  | 3S / Wide (36)          | 59             |
|       | 81     | 76     | Camso MEX HXD    | AH         | 1       | AA                  | 3S / Wide               | 59             |
|       |        | 76     |                  | AH         | 1       | OA                  | 3S / Narrow             | 59             |
|       |        | 78     |                  | AH         | I       | OA                  | 3S / Narrow             | 59             |
|       | 83.5   | 74     | Camso MEX HXD    | AH         | J       | UA                  | 3S / Offset / Rail Type | 59             |
| 485   | 92     | 72     | Camso MEX HXD    | AH         | I       | D                   | Offset                  | 59             |
|       |        | 78     |                  | AH         | I       | DA                  | 38                      | 59             |
| 500   | 92     | 80     | Camso MEX HXD    | AH         | l I     | DA                  | 38                      | 59             |
|       |        | 84     |                  | AH         | I       | DA                  | 38                      | 59             |
|       |        | 88     |                  | АН         | I       | DA                  | 3S                      | 59             |
|       |        |        |                  |            |         |                     |                         |                |
| 130   | 72     | 29     | Camso MEX SD     | A          | Α       | R                   | Standard                | 60             |
|       |        | 28     |                  | S          | Α       | F                   | Standard                | 60             |
|       |        | 30     |                  | S          | Α       | F                   | Standard                | 60             |
|       | 60     | 34     | Camso MEX SD     | S          | Α       | F                   | Standard                | 60             |
|       |        | 35     |                  | S          | A       | F                   | Standard                | 60             |
|       |        | 37     |                  | S          | Α       | F                   | Standard                | 60             |
|       | 38     | 38     |                  | S          | Α       | F                   | Standard                | 60             |
|       |        | 31     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 32     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 34     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 35     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 36     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 37     |                  | X          | Α       | R                   | Standard                | 60             |
| 180   |        | 38     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 39     |                  | X          | Α       | Р                   | Standard                | 60             |
|       |        | 39     |                  | X          | Α       | R                   | Standard                | 60             |
|       | 72     | 40     | Camso MEX SD     | X          | Α       | R                   | Standard                | 60             |
|       |        | 42     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 35     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 37     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 38     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 39     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 40     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 41     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 42     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 43     |                  | Р          | В       | R                   | Rail Type               | 60             |
|       |        | 34     |                  | Α          | Α       | Р                   | Standard                | 60             |
|       |        | 37     |                  | А          | А       | Р                   | Standard                | 60             |
|       |        | 38     |                  | А          | А       | Р                   | Standard                | 60             |
|       |        | 39     |                  | A          | Α       | Р                   | Standard                | 60             |
|       |        | 40     |                  | Α          | Α       | Р                   | Standard                | 60             |
|       |        | 41     |                  | A          | Α       | Р                   | Standard                | 60             |
| 200   | 72     | 42     | Camso MEX SD     | A          | Α       | Р                   | Standard                | 60             |
|       |        | 42     |                  | X          | A       | R                   | Standard                | 60             |
|       |        | 43     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 44     |                  | X          | Α       | R                   | Standard                | 60             |
|       |        | 43     |                  | V4         | J       | Р                   | Rail Type               | 60             |
|       |        | 45     |                  | V4         | J       | Р                   | Rail Type               | 60             |
|       |        | 47     |                  | V4         | J       | Р                   | Rail Type               | 60             |

| WIDTH | PITCH | LINK     | PRODUCT<br>NAME | TREAD | GUIDING | METAL PIECE<br>NAME | METAL PIECE<br>TYPE     | PAGE<br>NUMBER |
|-------|-------|----------|-----------------|-------|---------|---------------------|-------------------------|----------------|
|       |       | 60       |                 | V1    | I       | KA                  | 3S                      | 60             |
|       |       | 62       |                 | V1    | 1       | KA                  | 3S                      | 60             |
|       |       | 64       |                 | V1    | 1       | KA                  | 3S                      | 60             |
|       |       | 66       |                 | V1    | I       | KA                  | 3S                      | 60             |
|       |       | 68       |                 | V1    | I       | KA                  | 3S                      | 60             |
|       | 48    | 70       | Camso MEX SD    | V1    | I       | KA                  | 3S                      | 60             |
|       |       | 72       |                 | V1    | I       | KA                  | 3S                      | 60             |
|       |       | 74       |                 | V1    | I       | KA                  | 3S                      | 60             |
|       |       | 76       |                 | V2    | I       | KA                  | 3S                      | 60             |
|       |       | 70       |                 | V5    | J       | KA                  | 3S / Rail Type          | 60             |
| _     |       | 70       |                 | ZZ    | J       | K                   | Rail Type               | 60             |
|       |       | 37       |                 | A     | Α       | Р                   | Standard                | 60             |
|       |       | 39       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       |       | 40       |                 | Α     | Α       | Р                   | Standard                | 60             |
| 230   |       | 41       |                 | A     | Α       | Р                   | Standard                | 60             |
|       |       | 42       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       |       | 43       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       |       | 45       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       |       | 47       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       |       | 48       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       | 72    | 50       | Camso MEX SD    | A     | Α       | Р                   | Standard                | 60             |
|       |       | 52       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       |       | 54       |                 | Α     | Α       | Р                   | Standard                | 60             |
|       |       | 56       |                 | A     | А       | Р                   | Standard                | 60             |
|       |       | 57       |                 | Α     | Α       | P                   | Standard                | 60             |
|       |       | 59       |                 | Α     | A       | P                   | Standard                | 60             |
|       |       | 42       |                 | B     | Α       | P                   | Standard                | 60             |
|       |       | 56       |                 | В     | Α .     | P                   | Standard                | 60             |
|       |       | 46       |                 | V4    | J       | P                   | Rail Type               | 60             |
|       |       | 47       |                 | V4    | J       | P                   | Rail Type               | 60             |
|       |       | 72       |                 | V1    | l       | KA                  | 38                      | 60             |
|       |       | 76       |                 | V1    | !       | KA                  | 38                      | 60             |
|       | 48    | 78       | Camso MEX SD    | V1    |         | KA                  | 3S                      | 60             |
|       |       | 80       |                 | V1    |         | KA                  | 38                      | 60             |
| _     |       | 82       |                 | V1    | 1       | KA                  | 38                      | 60             |
|       |       | 41       |                 | D     | Α       | P                   | Standard                | 60             |
|       |       | 45       |                 | D     | Α       | P                   | Standard                | 60             |
|       |       | 47       |                 | D     | Α       | <u>Р</u><br>Р       | Standard                | 60             |
|       |       | 48       |                 | D     | Α       | Р                   | Standard                | 60             |
|       | 72    | 50       | Camso MEX SD    | D<br> | Α       | Р                   | Standard                | 60             |
|       | 12    | 52<br>52 | Calliso MEX 3D  | D     | A       | <u>г</u><br>Р       | Standard<br>Standard    | 60             |
| 250   |       | 52       |                 | B     | A       | PR                  | Standard                | 60             |
|       |       | 56       |                 | В     | A       | P                   | Standard                | 60             |
|       |       | 64       |                 | В     | A       | Р                   | Standard                | 60             |
|       |       | 57       |                 | D     | A       | Р                   | Standard                | 60             |
|       | 47    | 84       | Camso MEX SD    | V5    | J       | KA                  | 3S / Rail Type          | 60             |
| _     | 48.5  | 84       | Camso MEX SD    | OZ    | J       | KA                  | 3S / Offset / Rail Type | 60             |
| _     |       | 76       |                 | V1    | ı       | SA                  | 3S / Narrow             | 60             |
|       |       | 77       |                 | V1    | ı       | SA                  | 3S / Narrow             | 60             |
|       | 52.5  | 78       | Camso MEX SD    | V1    | ı       | SA                  | 3S / Narrow             | 60             |
|       |       | 80       |                 |       | •       | -7.                 | 3S / Narrow             | 60             |
|       |       | 78       |                 | V5    | J       | SA                  | 3S / Rail Type          | 60             |
|       |       |          |                 |       |         |                     |                         |                |
| _     | 55.5  | 79       | Camso MEX SD    | V1    | J       | SA                  | 3S / Rail Type          | 60             |

# TECHNICAL DATA | TRACKS

| I LOIIMIUAL DAIA |                |                  | INAUNO          |       |         |                     |                         |                |  |  |
|------------------|----------------|------------------|-----------------|-------|---------|---------------------|-------------------------|----------------|--|--|
| WIDTH            | PITCH          | LINK             | PRODUCT<br>NAME | TREAD | GUIDING | METAL PIECE<br>NAME | METAL PIECE<br>TYPE     | PAGE<br>NUMBER |  |  |
|                  |                | 82               |                 | V5    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
| 280              | 52.5           | 86               | Camso MEX SD    | V5    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 80               | 0 11577.00      | V5    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
|                  | 53             | 84               | Camso MEX SD    | V5    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 77               | 0 MEV.OD        | Y2    | J       | SF                  | Rail Type               | 60             |  |  |
|                  | 55 <del></del> | 81               | Camso MEX SD    | Y2    | J       | SF                  | Rail Type               | 60             |  |  |
|                  |                | 72               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 72               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 74               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 74               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 76               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 76               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 78               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 78               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 80               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 80               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 82               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 82               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
| 300              | 52.5           | 84               | Camso MEX SD    | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 84               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 86               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 86               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 88               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 88               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 90               |                 | V1    | I       | WA                  | 3S / Wide               | 60             |  |  |
|                  |                | 92               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 98               |                 | V1    | I       | SA                  | 3S / Narrow             | 60             |  |  |
|                  | 80             |                  | V5              | J     | SA      | 3S / Rail Type      | 60                      |                |  |  |
|                  |                | 84               |                 | V5    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 86               |                 | V5    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 88               |                 | V5    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 76               |                 | 0     | J       | SA                  | 3S / Offset / Rail Type | 60             |  |  |
|                  | 55.5           | 78               | Camso MEX SD    | 0     | J       | SA                  | 3S / Offset / Rail Type | 60             |  |  |
|                  | 33.3           | 82               | Calliso MLX 3D  | 0     | J       | SA                  | 3S / Offset / Rail Type | 60             |  |  |
|                  |                | 79               |                 | V1    | J       | SA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 40               |                 | Q     | Α       | W                   | Standard                | 60             |  |  |
| 320              | 100            | 43               | Camso MEX SD    | Q     | Α       | W                   | Standard                | 60             |  |  |
|                  |                | 52               |                 | Q     | Α       | W                   | Standard                | 60             |  |  |
|                  |                | 84               |                 | V1    | I       | WA                  | 3S                      | 60             |  |  |
| 350              | 52.5           | 86               | Camso MEX SD    | V1    | I       | WA                  | 3S                      | 60             |  |  |
| 550              |                | 88               |                 | V1    | I       | WA                  | 38                      | 60             |  |  |
|                  | 54.5           | 86               | Camso MEX SD    | V1    | J       | WA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 68               |                 | V1    | I       | EA                  | 3S / Wide               | 60             |  |  |
|                  |                | 72               |                 | V1    | I       | EA                  | 3S / Wide               | 60             |  |  |
|                  |                | 72               |                 | V1    | I       | WA                  | 3S / Narrow             | 60             |  |  |
|                  |                | 73               |                 | V1    | I       | WA                  | 3S / Narrow             | 60             |  |  |
| 400              | 72.5           | 74               | Camso MEX SD    | V1    | I       | EA                  | 3S / Wide               | 60             |  |  |
| 400              | , 2.0          | 72.5<br>74<br>76 | 5450 MEA OD     | V1    | I       | WA                  | 3S / Narrow             | 60             |  |  |
|                  |                |                  |                 | V1    | I       | EA                  | 3S / Wide (33)          | 60             |  |  |
|                  | 76<br>76<br>82 |                  | V1              | I     | EA      | 3S / Wide           | 60                      |                |  |  |
|                  |                |                  |                 | V1    | I       | EA                  | 3S / Wide               | 60             |  |  |
|                  |                | 74               |                 | V1    | J       | EA                  | 3S / Rail Type          | 60             |  |  |
|                  |                | 82               |                 | V1    | I       | JA                  | 3S                      | 60             |  |  |
| 450              | 71             | 84               | Camso MEX SD    | V1    | I       | JA                  | 3S                      | 60             |  |  |
|                  |                | 86               |                 | V1    | I       | JA                  | 3S                      | 60             |  |  |

| WIDTH | PITCH            | LINK | PRODUCT<br>NAME     | TREAD   | GUIDING | METAL PIECE<br>NAME | METAL PIECE<br>TYPE | PAGE<br>NUMBER |
|-------|------------------|------|---------------------|---------|---------|---------------------|---------------------|----------------|
|       |                  | 76   |                     | V1      | I       | AA                  | 3S / Wide (36)      | 60             |
|       | 81               | 76   | 0 MEV 0D            | V1      | I       | AA                  | 3S / Wide           | 60             |
| 450   | 81               | 76   | - Camso MEX SD      | V1      | I       | OA                  | 3S / Narrow         | 60             |
|       |                  | 78   |                     | V1      | I       | OA                  | 3S / Narrow         | 60             |
|       | 83,5             | 74   | Camso MEX SD        | Z2      | I       | EA                  | 3S                  | 60             |
| 381   | 100              | 42   | Camso MTL HXD       | MTL1    | -       | -                   | -                   | 66             |
|       | 100              | 56   | Camso MTL HXD       | MTL2    | -       | -                   | -                   | 66             |
| 457   | 100 (200)        | 51   | Camso MTL HXD       | MTL2    | -       | -                   | -                   | 66             |
|       | 100 (201)        | 51   | Camso MTL HXD       | MTL2    | -       | -                   | -                   | 66             |
|       |                  | 26   |                     | -       | -       | -                   | -                   | 67             |
|       |                  | 27   |                     | -       | -       | -                   | -                   | 67             |
| 10    | 152.4            | 28   | Camso Rubber OTT    | -       | -       | -                   | -                   | 67             |
|       |                  | 29   |                     | -       | -       | -                   | -                   | 67             |
|       |                  | 31   |                     | -       | -       | -                   | -                   | 67             |
|       |                  | 29   |                     | -       | -       | -                   | -                   | 67             |
|       |                  | 30   |                     | -       | -       | -                   | -                   | 67             |
| 12    | 152.4            | 31   | Camso Rubber OTT    | -       | -       | -                   | -                   | 67             |
|       |                  | 32   |                     | -       | -       | -                   | -                   | 67             |
|       |                  | 33   |                     | -       | -       | -                   | -                   | 67             |
|       |                  |      |                     |         |         |                     |                     |                |
| 400   | 224              | 36   | Camso Paver HXD     | Smooth  | -       | -                   | -                   | 68             |
| 406   | 224              | 31   | - Camso Paver HXD   | Smooth  | -       | -                   | -                   | 68             |
| 406   | 224              | 31   | Calliso Pavel HAD   | Chevron | -       | -                   | -                   | 68             |
| 457   | 224              | 36   | - Camso Paver HXD   | Smooth  | -       | -                   | -                   | 68             |
| 407   | <b>457</b> 224 — |      | Callisu Favel HAD   | Chevron | -       | -                   | -                   | 68             |
|       |                  |      |                     |         |         |                     |                     |                |
| 700   | 100              | 96   | - Camso Carrier HXD | A2      | В       | Т                   | Standard            | 68             |
| 700   | 100              | 98   | James Carrier HAD   | A2      | В       | Т                   | Standard            | 68             |
| 750   | 150              | 66   | Camso Carrier HXD   | A2      | В       | Т                   | Standard            | 68             |

| WIDTH<br>(mm) | TIRE SIZE            | LINK | PRODUCT NAME    | DESCRIPTION        | PAGE<br>NUMBER |
|---------------|----------------------|------|-----------------|--------------------|----------------|
| 335           | 10-16.5 / 27x10.5-15 | 18   | Camso Steel OTT | 335x18x263 B T10 S | 67             |
| 380           | 12-16.5              | 20   | Camso Steel OTT | 380x20x263 B T12 S | 67             |

| WIDTH<br>(mm) | PITCH | PRODUCT NAME       | DESCRIPTION  | PAGE<br>NUMBER |  |
|---------------|-------|--------------------|--------------|----------------|--|
| 400           | 135   | Camso EXC HXD PADS | RP-400125AHB | - 61           |  |
| 400           | 133   | Camso EXC HXD PADS | RP-400125AHC | 01             |  |
|               | 140   | Camso EXC HXD PADS | RP-450130AHA |                |  |
| 450           | 15/   | Camso EXC HXD PADS | RP-450145AHA | 61             |  |
|               | 154   | Camso EXC HXD PADS | RP-450145AHB |                |  |
| 500           | 171.5 | Camso EXC HXD PADS | RP-500165AHB | 61             |  |
| 600           | 190   | Camso EXC HXD PADS | RP-600185AHA | 61             |  |

<sup>\*</sup>Verify exact fitment with the machine serial number at: https://camso.co/en/products-solutions/construction

The information contained in this document is for guidance purposes only. Please visit **camso.co**, **connectbeyondroad.michelingroup.com** or consult your sale representative.

## **5 YEAR** TIRE WARRANTY\*

All Camso products are guaranteed to be free from defects due to materials and workmanship.

If a product is deemed defective upon our examination and analysis inside a period of five (5) years from the manufacture of the product, Camso will provide an allowance against the current purchase price. The allowance will be determined by Camso, to be applied towards the purchase of a new product, based on the remaining unused portion of the tread or warrantable lifetime on the defective product.

The cost of transportation, service, and sales tax, already paid will be borne by the owner of the Camso product making the claim. Warranty will not apply if the Camso product has been installed incorrectly, altered, repaired or misused in any matter whatsoever, which, in our opinion, has affected the performance of the tire.

Camso can not be held responsible for damages or claims caused by the tire whether such damages are direct or indirect, special, consequential or otherwise. Any liability is strictly limited to repair or reduction of an applicable purchase, according to the mentioned provision in our General Claim Policy and Adjustments.

This warranty is for the exclusive benefit of the owner and is transferrable to a subsequent owner but is not otherwise assignable.

\*This text is an extract of our General Claim Policy and Adjustments, which is the only valid and applicable Policy.

## **WARRANTY TERMS CONSTRUCTION TRACK\*\***

| Track Series     |                      |                |
|------------------|----------------------|----------------|
| Machine Type     | Months of Service*** | Hours Limit*** |
| Camso SD series  | · · · · · ·          |                |
| CTL              | 18                   | 1500           |
| MEX              | 30                   | 2500           |
| Camso HXD series |                      |                |
| CTL              | 24                   | 2000           |
| MEX              | 42                   | 3500           |
| PAD's            | 20                   | 2500           |
| MTL              | 14                   | 1200           |
| ОТТ              | 12                   | No Limit       |
| Steel OTT        | 24                   | No Limit       |
| CAR              | 12                   | 1000           |
| RHV              | 12                   | 1000           |
| PAV              | 18                   | 1500           |

<sup>\*\*</sup> This is an extract of our warranty certificate.

<sup>\*\*\*</sup> Whichever comes first. If unknown months of service, manufacturing date will be used.

## CAMSO DIGITAL TOOLS

### **CAMSO WEBSITE**

Developed for those who work and play on a surface that isn't a road, Camso.co provides information and tools wherever and whenever users need them, no matter what device they're using: a phone, a tablet or a computer.

#### camso.co

- Product selectors for OTR tires, tracks and track systems for the Construction, Material Handling, Agriculture, and Powersports industries
- Dedicated content such as testimonials, videos, best practices and industry news
- Service and support information including warranty documents, data books and fitment guides
- Contact finder



## **BEYOND ROAD CONNECT**

<u>connectbeyondroad.michelingroup.com</u> or on the App Store

Beyond Road connect, previously known as the Camso Connect, is a tool that facilitates the explanation of the features and benefits of our Material Handling, Construction and Agricultural products.

- Accessible off-line with the iOs app version
- Complete product information, including features and benefits and product sheets
- 360 views of products and action videos
- Product support information



#### CONNECT WITH US FOR EXCLUSIVE ROAD FREE CONTENT



@camso.co



/camoplastsolideal



@camso\_co



@camso\_co



@camso\_co



