WE START WHERE THE ROAD ENDS

CAMSO

ROAD FREE COMPANY

CONSTRUCTION TIRES & TRACKS

DATABOOK 2016

GENERAL REFERENCE DATA

LOAD INDEX EQUIVALENCES in kg and lb

LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb
100	800	1,764	121	1,450	3,200	142	2,650	5,840	160	4,500	9,920	181	8,250	18,190	202	15,000	33,070
101	825	1,819	122	1,500	3,310	143	2,725	6,010	161	4,625	10,200	182	8,500	18,740	203	15,500	34,180
102	850	1,874	123	1,550	3,420	144	2,800	6,170	162	4,750	10,470	183	8,750	19,290	204	16,000	35,280
103	875	1,929	124	1,600	3,530	145	2,900	6,390	163	4,875	10,750	184	9,000	19,840	205	16,500	36,380
104	900	1,985	125	1,650	3,640	146	3,000	6,610	164	5,000	11,020	185	9,250	20,390	206	17,000	37,480
105	925	2,040	126	1,700	3,750	147	3,075	6,780	165	5,150	11,350	186	9,500	20,940	207	17,500	38,590
106	950	2,095	127	1,750	3,860	148	3,150	6,950	166	5,300	11,690	187	9,750	21,500	208	18,000	39,690
110	1,060	2,337	128	1,800	3,970	149	3,250	7,170	170	6,000	13,230	188	10,000	22,050	209	18,500	40,790
111	1,090	2,403	129	1,850	4,080	150	3,350	7,390	171	6,150	13,560	189	10,300	22,710	210	19,000	41,890
112	1,120	2,470	130	1,900	4,190	151	3,450	7,610	172	6,300	13,890	190	10,600	23,370	211	19,500	43,000
113	1,150	2,536	131	1,950	4,300	152	3,550	7,830	173	6,500	14,330	191	10,900	24,030	212	20,000	44,100
114	1,180	2,602	132	2,000	4,410	153	3,650	8,050	174	6,700	14,770	192	11,200	24,690	213	20,600	45,420
115	1,215	2,679	133	2,060	4,540	154	3,750	8,270	175	6,900	15,210	193	11,500	25,360	214	21,200	46,750
116	1,250	2,756	134	2,120	4,670	155	3,875	8,540	176	7,100	15,650	194	11,800	26,020	215	21,800	48,070
117	1,285	2,833	135	2,180	4,810	156	4,000	8,820	177	7,300	16,090	195	12,150	26,790	216	22,400	49,390
118	1,320	2,911	136	2,240	4,940	157	4,125	9,090	178	7,500	16,530	196	12,500	27,560	217	23,000	50,700
119	1,360	2,999	140	2,500	5,510	158	4,250	9,370	179	7,750	17,090	200	14,000	30,870	218	23,600	52,040
120	1,400	3,090	141	2,575	5,680	159	4,375	9,650	180	8,000	17,640	201	14,500	31,970	219	24,300	53,580

INFLATION UNITS

Kpa	Bar	Psi	kg/cm²
100	1	14.5	1.0
150	1.5	22	1.5
200	2	29	2
250	2.5	36	2.6
300	3	44	3.1
350	3.5	51	3.6
400	4	58	4.1
450	4.5	65	4.6
500	5	73	5.1
550	5.5	80	5.6
600	6	87	6.1
650	6.5	94	6.6
700	7	102	7.1
750	7.5	109	7.7
800	8	116	8.2
850	8.5	123	8.7
900	9	131	9.2
950	9.5	138	9.7
1000	10	145	10.2
1050	10.5	152	10.7

SPEED INDEX

Speed km/h	Speed index
5	A1
10	A2
15	A3
20	A4
25	A5
40	A8
50	B

TABLE OF CONTENTS

SKID STEER LOADERS

CAMSO SKS 775 — 4
CAMSO SKS 753 — 5
CAMSO SKS 732 — 6
CAMSO SKS 532 — 7
CAMSO SKS 793S — 8
CAMSO HAULER SKZ — 9
CAMSO SKS 792S *formerly Solideal SolidAir SKS* — 10
CAMSO SKS 796S *formerly Solideal SolidAir SM* — 11
CAMSO HAULER SKS — 12
CAMSO XTRA WALL — 14
CAMSO SKS 774 *formerly Solideal Hauler XD44* — 16
CAMSO SKS 332 *formerly Solideal Gripper* — 17
CAMSO SKS 782S *formerly Solideal Safetymaster SKS* — 17
CAMSO SKS 786S *formerly Solideal Safetymaster SM* — 19

BACKHOE LOADERS

CAMSO BHL 753 *formerly Solideal BHZ* — 20
CAMSO SL R4 — 21
CAMSO BHL 532 *formerly Solideal SLA R4* — 23
CAMSO 4L R1 — 24
CAMSO BHL 530 *formerly Solideal MR F3* — 26

TELEHANDLERS

CAMSO TLH 792S *formerly Solideal SolidAir TLH* — 27
CAMSO SL G3 — 28
CAMSO SL G2 — 30
CAMSO TLH 532 *formerly Solideal TH2* — 32
CAMSO TM R4 — 34
CAMSO 4L I3 — 35

WHEEL LOADERS | ARTICULATED DUMP TRUCKS MOTOR GRADERS

CAMSO WHL 753R *formerly Solideal SRGP* — 36
CAMSO WHL 775R *formerly Solideal SRLD* — 38
CAMSO WHL 776R *formerly Solideal SRLS* — 40
CAMSO ADT 753R *formerly Solideal SRAT* — 42
CAMSO WHL 775 — 44
CAMSO LM L3 — 46
CAMSO LM L2 — 50
CAMSO WHL 773 *formerly Solideal RM L3* — 54
CAMSO SKZ — 56

WHEEL EXCAVATORS

CAMSO WL — 58
CAMSO WEX 552 *formerly Solideal WEX* — 60

COMPACTION EQUIPMENT

CAMSO CMP 533 — 62
CAMSO CMP 576 *formerly Solideal SM C1* — 63

TRUCK MOUNTED FORKLIFTS

CAMSO SKS 511 *formerly Solideal SKS R1* — 64

MINI-EXCAVATORS

CAMSO MEX HXD — 66
CAMSO MEX SD — 68

COMPACT TRACK LOADERS

CAMSO CTL HXD — 70
CAMSO CTL SD — 71

MULTI-TERRAIN LOADERS

CAMSO MTL HXD — 72

OTT FOR SKID STEER LOADERS

CAMSO OTT HXD — 73

PAVERS

CAMSO HXD SMOOTH — 74
CAMSO HXD CHEVRON — 75

CARRIERS

CAMSO CARRIER HXD — 76

COMPLETE LINE OVERVIEW — 78



CAMSO SKS 775

THE VERSATILE HEAVY-DUTY CHOICE

FEATURES

- Massive 50/32 tread depth with high lug-to-void ratio
- Innovative tread pattern
- New impact guard sidewall design
- Hauler stepped shoulder lugs

BENEFITS

- Maximizes tire life and tread impact resistance
- Optimizes traction and versatility for mixed and hard surface applications
- Deflects debris to better protect sidewalls and reduce stress cracking
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5 (265/70-16.5)	10	8.25	-	778	269	40.0	-	-	-	TBLS	134	A2	L-5	5.25	3380	2460	2140	1690
				30.6	*10.6*	*50*	-	-	-					*75*	*7450*	*5450*	*4700*	*3750*
12-16.5 (305/70-16.5)	12	9.75	-	833	307	40.0	-	-	-	TBLS	145	A2	L-5	5.60	4550	3310	2880	2280
				32.8	*12.1*	*50*	-	-	-					*80*	*10050*	*7300*	*6350*	*5050*



CAMSO SKS 753

VERSATILITY AND DURABILITY

FEATURES

- Innovative non-directional tread pattern
- High lug-to-void ratio
- New impact guard sidewall design
- Stepped shoulder lugs

BENEFITS

- Optimizes durability and versatility on mixed and hard surfaces
- Provides excellent wear and puncture resistance
- Deflects debris to better protect sidewalls and reduce stress cracking
- Enhance tread cleanout and traction in softer surfaces

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TL/TT	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	10 km/h	15 km/h	30 km/h
10-16.5	10	8.25	-	791	268	29	-	367	2386	TL	-	-	-	5,20	3375	2135	1685	1450
				31,1	*10,6*	*37*	-	*14,4*	*93,9*					*75*	*7440*	*4710*	*3720*	*3205*
12-16.5	12	9.75	-	837	326	29	-	388	2496	TL	-	-	-	5,50	4525	2865	2265	1950
				33,0	*12,8*	*37*	-	*15,3*	*98,3*					*80*	*9985*	*6320*	*4995*	*4300*
14-17.5 (355/70-17.5)	14	10.50	-	950	357	40	-	436	2861	TL	-	-	-	5,50	6125	3875	3060	2635
				37,4	*14,1*	*50*	-	*17,2*	*112,6*					*80*	*13495*	*8540*	*6745*	*5805*



CAMSO SKS 732

THE ULTIMATE OFF-ROAD SKID STEER TIRE SOLUTION

FEATURES

- Massive tread depth with optimized lug-to-void ratio
- New impact guard sidewall design
- New wraparound hauler steps
- Innovative curved and tapered tread lugs

BENEFITS

- Maximizes off-road durability and traction
- Deflects debris to better protect sidewalls and reduce stress cracking
- Maximizes tread cleanout for best off-road traction
- Enhances traction and ensures even wearing

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5 (265/70-16.5)	8	8.25	-	777	265	23.0	-	-	-	TBLS	129	A2	R-4	4.20	2960	2160	1875	1480
				30.6	*10.4*	*29*	-	-	-					*60*	*6550*	*4750*	*4150*	*3250*
10-16.5 (265/70-16.5)	10	8.25	-	777	265	23.0	-	-	-	TBLS	134	A2	R-4	5.25	3380	2460	2140	1690
				30.6	*10.4*	*29*	-	-	-					*75*	*7450*	*5450*	*4700*	*3750*
12-16.5 (305/70-16.5)	10	9.75	-	836	330	25.0	357	585	2520	TBLS	140	A2	R-4	4.50	4020	2930	2545	2010
				32.9	*13.0*	*31*	*14.0*	*23.0*	*99.2*					*64*	*8850*	*6450*	*5600*	*4450*
12-16.5 (305/70-16.5)	12	9.75	-	833	325	27	358	381	2516	TBLS	145	A2	R-4	5.60	4550	3310	2880	2280
				32.5	*12.6*	*23*	*14.1*	*15.0*	*99.1*					*80*	*10050*	*7300*	*6350*	*5050*
14-17.5 (355/70-17.5)	14	10.50	-	930	370	32.0	-	-	-	TBLS	155	A2	R-4	5.60	6120	4460	3875	3060
				36.6	*14.6*	*40*	-	-	-					*80*	*13500*	*9850*	*8550*	*6750*



CAMSO SKS 532

BEST GENERAL DUTY SOLUTION

FEATURES

- Extra-deep tread depth with curved tread lugs
- Self cleaning stepped tread
- Impact guard sidewall design
- Void guard tread impact protection

BENEFITS

- Ensures great durability and extra traction
- Maximizes cleanout for improved off-road traction
- Deflects debris to better protect sidewalls and reduce stress cracking
- Protects from tread punctures to minimize flat tires

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TL/TT	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	10 km/h	15 km/h	30 km/h
10-16.5	10	8.25	-	768	278	18	-	356	2316	TL	-	-	-	5,20	3375	2135	1685	1450
				30,2	*10,9*	*23*	-	*14,0*	*91,2*					*75*	*7440*	*4710*	*3720*	*3205*
12-16.5	12	9.75	-	831	330	19	-	383	2513	TL	-	-	-	5,50	4525	2865	2265	1950
				32,7	*13,0*	*24*	-	*15,1*	*98,9*					*80*	*9985*	*6320*	*4995*	*4300*
14-17.5 (355/70-17.5)	14	10.50	-	925	351	24	-	423	2789	TL	-	-	-	5,50	6125	3875	3060	2635
				36,4	*13,8*	*30*	-	*16,7*	*109,8*					*80*	*13495*	*8540*	*6745*	*5805*



CAMSO SKS 793S

SEVERE-DUTY AND FLAT-FREE

FEATURES

- Innovative non-directional tread pattern
- New elongated aperture design
- Massive tread depth
- Reusable wheel

BENEFITS

- Provides greater durability and versatility for mixed and hard surface applications
- Provides excellent ride quality and reduces cracking
- Improves durability for longer service life
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] *[inches]*						HEEL		LOAD CAPACITY [kg] *[lb]*						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
										LOAD WHEEL		STEERING WHEEL				
		O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	780	233	39	253	372	2451	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	*9.2*	*49*	*10.0*	*14.6*	*96.5*			-	*8885*	*6835*	*8900*	*8100*	*6850*	*10350*
33x12-20 (12-16.5)	7.50	830	285	39	310	391	2503	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	*11.2*	*50*	*12.2*	*15.4*	*98.5*			-	*11465*	*8820*	*11500*	*10400*	8850	13350
36x14-20 (14-17.5)	7.50	910	322	52	359	424	2858	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	*12.7*	*66*	*14.1*	*16.7*	*112.5*			-	*13650*	*10500*	*13650*	*12350*	10500	15850



CAMSO HAULER SKZ

OFF-ROAD TRACTION AND DURABILITY

FEATURES

- Non-directional extra deep tread
- Large footprint with massive lug-to-void ratio
- Versatile tread pattern
- Wide sidewall

BENEFITS

- Improves tread life and resistance to punctures
- Provides excellent durability and even tread wearing
- Optimizes traction and handling on mixed and hard surfaces
- Provides superior side impact resistance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5	10	8.25	-	786	275	31.0	295	364	2335	TBLS	134	A2	L-4	5.25	3380	2460	2140	1690
				30.9	*10.8*	*39*	*11.6*	*14.3*	*91.9*					*75*	*7450*	*5450*	*4700*	*3750*
12-16.5	12	9.75	-	831	321	35.0	344	384	2483	TBLS	145	A2	L-4	5.60	4550	3310	2880	2280
				32.7	*12.6*	*44*	*13.5*	*15.1*	*97.8*					*80*	*10050*	*7300*	*6350*	*5050*
14-17.5	14	10.50	-	932	352	45.0	382	426	2733	TBLS	155	A2	L-4	5.60	6120	4460	3875	3060
				36.7	*13.9*	*57*	*15.0*	*16.8*	*107.6*					*80*	*13500*	*9850*	*8550*	*6750*
31x15.5-15	8	13.00	13LB	777	384	24.0	24.0	24.0	2304	TBLS	126	A2	L-4	3.10	2670	1940	1690	1340
				30.6	*15.1*	*30*	*0.9*	*0.9*	*90.7*					*44*	*5900*	*4300*	*3750*	*2950*
33x15.5-16.5	14	12.00	-	836	380	35.0	414	384	2446	TBLS	148	A2	L-4	4.90	4980	3620	3150	2490
				32.9	*15.0*	*44*	*16.3*	*15.1*	*96.3*					*70*	*11000*	*8000*	*6950*	*5500*



CAMSO SKS 792S

Formerly Solideal SolidAir SKS

FLAT-PROOF DURABILITY MEETS OFF-ROAD TRACTION

FEATURES

- FEA-validated aperture design
- Hauler stepped tread design
- Reusable wheel

BENEFITS

- Improves ride quality and reduces cracking
- Provides excellent cleanout for improved off-road traction
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] *[inches]*						HEEL		LOAD CAPACITY [kg] *[lb]*						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
										LOAD WHEEL		STEERING WHEEL				
		O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	*9.3*	*42*	*10.2*	*14.6*	*99.3*			-	*8885*	*6835*	*8900*	*8100*	*6850*	*10350*
33x12-20 (12-16.5)	7.50	831	287	40	326	388	2669	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	*11.3*	*50*	*12.8*	*15.3*	*105.1*			-	*11465*	*8820*	*11500*	*10400*	8850	13350
36x14-20 (14-17.5)	7.50	910	320	43	345	426	2860	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	*12.6*	*54*	*13.6*	*16.8*	*112.6*			-	*13650*	*10500*	*13650*	*12350*	10500	15850



CAMSO SKS 796S

Formerly Solideal SolidAir SM

HARD SURFACE SOLID TIRE SOLUTION

FEATURES

- FEA-validated aperture design
- Full-width footprint
- Reusable wheel

BENEFITS

- Improves ride quality and reduces cracking
- Provides excellent stability and tread life
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] *[inches]*						HEEL		LOAD CAPACITY [kg] *[lb]*						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
										LOAD WHEEL		STEERING WHEEL				
		O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	*9.3*	*42*	*10.2*	*14.6*	*99.3*			-	*8885*	*6835*	*8900*	*8100*	*6850*	*10350*
33x12-20 (12-16.5)	7.50	831	287	40	326	388	2669	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	*11.3*	*50*	*12.8*	*15.3*	*105.1*			-	*11465*	*8820*	*11500*	*10400*	8850	13350
36x14-20 (14-17.5)	7.50	909	326	43	360	425	2873	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	*12.8*	*54*	*14.2*	*16.7*	*113.1*			-	*13650*	*10500*	*13650*	*12350*	10500	15850



CAMSO HAULER SKS

VERSATILE DURABILITY ON MIXED SURFACES

FEATURES

- Extra-wide, deep lug design
- Hauler stepped tread design
- Reinforced sidewall
- Undertread protection

BENEFITS

- Provides excellent durability and traction in off-road conditions
- Provides excellent cleanout for improved traction
- Provides improved side impact resistance
- Improves tread impact resistance for fewer flat tires

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
5.70-12	6	4.50I	5JA	585	157	12.0	-	275	1746	TBLS	93	A2	R4	4.20	1040	760	660	520
				23.0	*6.2*	*15*	*0.0*	*10.8*	*68.7*					*60*	*2300*	*1700*	*1450*	*1150*
23x8.5-12	6	7.00I	7JA	578	210	12.5	-	261	1725	TBLS	101	A2	R4	3.50	1300	950	825	650
				22.8	*8.3*	*16*	*0.0*	*10.3*	*67.9*					*50*	*2850*	*2100*	*1800*	*1450*
23x8.5-12	12	7.00I	7JA	578	218	12.5	233	286	1725	TBLS	115	A2	R4	7.00	1950	1420	1235	980
				22.8	*8.6*	*16*	*9.2*	*11.3*	*67.9*					*100*	*4300*	*3150*	*2750*	*2150*
27x8.5-15 (215/70-15)	6	7JA	6.5K/7J	680	210	13.0	-	316	2029	TBLS	112	A2	R4	3.10	1780	1290	1125	890
				26.8	*8.3*	*16*	*0.0*	*12.4*	*79.9*					*44*	*3950*	*2850*	*2500*	*1950*
27x10.5-15	8	8.50	8LB/8W	700	252	19.5	269	333	2120	TBLS	120	A2	R4	4.10	2200	1600	1390	1100
				27.6	*9.9*	*25*	*10.6*	*13.1*	*83.5*					*59*	*4850*	*3550*	*3050*	*2450*
31x15.5-15	8	13.00	13LB	782	385	24.0	405	366	2334	TBLS	126	A2	R4	3.10	2670	1940	1690	1340
				30.8	*15.2*	*30*	*15.9*	*14.4*	*91.9*					*44*	*5900*	*4300*	*3750*	*2950*
31x15.5-15	12	13.00	13LB	780	384	24.0	403	362	2353	TBLS	136	A2	R4	5.25	3520	2560	2230	1760
				30.7	*15.1*	*30*	*15.9*	*14.3*	*92.6*					*75*	*7750*	*5650*	*4900*	*3900*
10-16.5	8	8.25	-	784	275	16.5	293	361	2340	TBLS	129	A2	R4	4.20	2960	2160	1875	1480
				30.9	*10.8*	*21*	*11.5*	*14.2*	*92.1*					*60*	*6550*	*4750*	*4150*	*3250*
10-16.5 (265/70-16.5)	10	8.25	-	790	275	16.5	297	364	2358	TBLS	134	A2	R4	5.25	3380	2460	2140	1690
				31.1	*10.8*	*21*	*11.7*	*14.3*	*92.8*					*75*	*7450*	*5450*	*4700*	*3750*
31.5x13-16.5	10	9.75	-	787	311	18.0	333	361	2364	TBLS	139	A2	R4	4.90	3850	2800	2435	1920
				31.0	*12.2*	*23*	*13.1*	*14.2*	*93.1*					*70*	*8500*	*6200*	*5400*	*4250*
12-16.5 (305/70-16.5)	10	9.75	-	830	325	20.3	359	385	2511	TBLS	140	A2	R4	4.50	4020	2930	2545	2010
				32.7	*12.8*	*26*	*14.1*	*15.2*	*98.9*					*64*	*8850*	*6450*	*5600*	*4450*
33x15.5-16.5	12	12.00	-	829	386	20.0	381	2485	2364	TBLS	145	A2	R4	4.10	4580	3340	2900	2290
				32.6	*15.2*	*25*	*15.0*	*97.8*	*93.1*					*59*	*10100*	*7350*	*6400*	*5050*
14-17.5	14	10.50	-	932	352	27.0	427	2802	2511	TBLS	155	A2	R4	5.60	6120	4460	3875	3060
				36.7	*13.9*	*34*	*16.8*	*110.3*	*98.9*					*80*	*13500*	*9850*	*8550*	*6750*



CAMSO HAULER SKS (cont.)

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
15-19.5	14	11.75	12.25	1020	398	28.0	460	3044	1746	TBLS	164	A2	R4	5.60	8010	5830	5070	4010
				40.2	*15.7*	*35*	*18.1*	*119.8*	*68.7*					*80*	*17700*	*12850*	*11200*	*8850*
385/65-22.5	12	11.75	12.25	1100	374	28.0	498	3265	1725	TBLS	-	A2	R4	5.00	9090	6610	5750	4540
				43.3	*14.7*	*35*	*19.6*	*128.5*	*67.9*					*71*	*20050*	*14600*	*12700*	*10000*
385/65-22.5	16	11.75	12.25	1092	382	28.0	495	3591	1725	TBLS	175	A2	R4	7.00	11120	8100	7040	5560
				43.0	*15.0*	*35*	*19.5*	*141.4*	*67.9*					*100*	*24550*	*17900*	*15550*	*12250*
385/45-28	16	W13x28	-	1086	370	25.5	495	3301	2029	TBLS	176	A2	R4	6.50	11120	8100	7040	5560
				42.8	*14.6*	*32*	*19.5*	*130.0*	*79.9*					*93*	*24550*	*17900*	*15550*	*12250*
385/45-28	18	W13x28	-	1092	382	25.5	494	3327	2120	TBLS	179	A2	R4	7.50	12140	8840	7685	6070
				43.0	*15.0*	*32*	*19.4*	*131.0*	*83.5*					*107*	*26800*	*19500*	*16950*	*13400*



CAMSO XTRA WALL

BUILT FOR TOUGH OFF-ROAD APPLICATIONS

FEATURES

- Wide, deep lug design
- Hauler stepped tread design
- Reinforced sidewall
- Rim protector

BENEFITS

- Provides enhanced durability and traction in off-road conditions
- Provides enhanced cleanout for improved traction
- Provides improved side impact resistance
- Protects wheel from impact damage

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
5.70-12	6	4.50I	5JA	566	152	13.0	162	266	1689	TBLS	93	A2	R4	4.20	1040	760	660	520
				22.3	*6.0*	*16*	*6.4*	*10.5*	*66.5*					*60*	*2300*	*1700*	*1450*	*1150*
23x8.5-12	6	7.00I	7JA	572	213	14.5	228	256	1723	TBLS	101	A2	R4	3.50	1300	950	825	650
				22.5	*8.4*	*18*	*9.0*	*10.1*	*67.8*					*50*	*2850*	*2100*	*1800*	*1450*
23x8.5-12	12	7.00I	7JA	586	231	14.5	-	275	1749	TBLS	115	A2	R4	7.00	1950	1420	1235	980
				23.1	*9.1*	*18*	-	*10.8*	*68.9*					*100*	*4300*	*3150*	*2750*	*2150*
26x12-12	10	10.50	8.50/8.50JA	655	297	21.5	-	297	1955	TBLS	124	A2	R-4	4.50	2580	1870	1630	1290
				25.8	*11.7*	*27*	-	*11.7*	*77.0*					*64*	*5700*	*4150*	*3600*	*2850*
27x10-12	14	8.00G	-	700	265	19.0	288	316	2111	TT	132	A2	R-4	7.00	4640	4080	3545	2800
				27.6	*10.4*	*24*	*11.3*	*12.4*	*83.1*					*100*	*10250*	*9000*	*7850*	*6200*
7.00-15	6	5.50	6LB	775	222	16.0	246	361	2359	TBLS	121	A2	R-4	4.10	2280	1660	1440	1140
				30.5	*8.7*	*20*	*9.7*	*14.2*	*92.9*					*59*	*5050*	*3650*	*3200*	*2500*
27x8.5-15	6	7JA	6.5K/7J	679	213	15.0	245	309	2026	TBLS	112	A2	R-4	3.10	1780	1290	1125	890
				26.7	*8.4*	*19*	*9.6*	*12.2*	*79.8*					*44*	*3950*	*2850*	*2500*	*1950*
31x15.5-15	8	13.00	13LB	788	384	24.0	401	365	2352	TBLS	126	A2	R-4	3.10	2670	1940	1690	1340
				31.0	*15.1*	*30*	*15.8*	*14.4*	*92.6*					*44*	*5900*	*4300*	*3750*	*2950*
26x12-16.5 (300/40-16.5)	10	9.75	-	663	283	23.5	295	303	1986	TBLS	124	A2	R-4	4.00	2580	1870	1630	1290
				26.1	*11.1*	*30*	*11.6*	*11.9*	*78.2*					*57*	*5700*	*4150*	*3600*	*2850*
10-16.5	6	8.25	-	763	275	17.5	296	349	2277	TBLS	124	A2	R-4	3.15	2510	1830	1590	1260
				30.0	*10.8*	*22*	*11.7*	*13.7*	*89.6*					*45*	*5550*	*4050*	*3500*	*2800*
10-16.5	8	8.25	-	763	275	17.5	293	349	2277	TBLS	129	A2	R-4	4.20	2960	2160	1875	1480
				30.0	*10.8*	*22*	*11.5*	*13.7*	*89.6*					*60*	*6550*	*4750*	*4150*	*3250*
10-16.5	10	8.25	-	765	276	17.5	-	348	2306	TBLS	134	A2	R-4	5.25	3380	2460	2140	1690
				30.1	*10.9*	*22*	-	*13.7*	*90.8*					*75*	*7450*	*5450*	*4700*	*3750*
12-16.5	8	9.75	-	826	319	18.0	355	372	2465	TBLS	135	A2	R-4	3.50	3440	2510	2180	1720
				32.5	*12.6*	*23*	*14.0*	*14.6*	*97.0*					*50*	*7600*	*5550*	*4800*	*3800*



CAMSO XTRA WALL (cont.)

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
12-16.5	10	9.75	-	820	318	18.0	349	369	2479	TBLS	140	A2	R-4	4.50	4020	2930	2545	2010
				32.3	*12.5*	*23*	*13.7*	*14.5*	*97.6*					*64*	*8850*	*6450*	*5600*	*4450*
12-16.5	12	9.75	-	824	321	18.0	358	372	2459	TBLS	145	A2	R-4	5.60	4550	3310	2880	2280
				32.4	*12.6*	*23*	*14.1*	*14.6*	*96.8*					*80*	*10050*	*7300*	*6350*	*5050*
14-17.5	12	10.50	-	912	351	31.0	397	417	2746	TBLS	152	A2	R-4	4.80	5610	4080	3550	2800
				35.9	*13.8*	*39*	*15.6*	*16.4*	*108.1*					*69*	*12400*	*9000*	*7850*	*6200*



CAMSO SKS 774

Formerly Solideal Hauler XD44

A TOUGH L5 HARD SURFACES TIRE

FEATURES

- Extra-deep L5 tread
- 80% lug-to-void ratio
- Reinforced sidewall

BENEFITS

- Provides excellent tire life and tread impact resistance
- Provides excellent durability protection against tread impacts
- Provides improved side impact resistance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5	10	8.25	-	786	272	35.0	299	366	2393	TBLS	134	A2	L-5	5.25	3380	2460	2140	1690
				30.9	*10.7*	*44*	*11.8*	*14.4*	*94.2*					*75*	*7450*	*5450*	*4700*	*3750*
12-16.5	12	9.75	-	833	323	35.0	392	392	2542	TBLS	145	A2	L-5	5.60	4550	3310	2880	2280
				32.8	*12.7*	*44*	*15.4*	*15.4*	*100.1*					*80*	*10050*	*7300*	*6350*	*5050*



CAMSO SKS 332

Formerly Solideal Gripper

RELIABLE PERFORMANCE AND QUALITY

FEATURES

- Deep lug design
- Lower lug-to-void ratio
- Premium rubber compounds

BENEFITS

- Provides good durability and traction in light-duty conditions
- Provides good traction in off-road conditions
- Provides good chunk and tear resistance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5	8	8.25	-	764	275	15.0	304	346	2313	TBLS	129	A2	R-4	4.20	2960	2160	1875	1480
				30.1	*10.8*	*19*	*12.0*	*13.6*	*91.1*					*60*	*6550*	*4750*	*4150*	*3250*
12-16.5	10	9.75	-	819	318	18.0	348	370	2521	TBLS	140	A2	R-4	4.50	4020	2930	2545	2010
				32.2	*12.5*	*23*	*13.7*	*14.6*	*99.3*					*64*	*8850*	*6450*	*5600*	*4450*



CAMSO SKS 782S

Formerly Solideal Safetymaster SKS

SOLID OFF-ROAD TRACTION

FEATURES

- Full solid construction
- Hauler stepped tread design
- Reusable wheel

BENEFITS

- Provides excellent durability and flat-free operation
- Provides excellent cleanout for improved off-road traction
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] *[inches]*						HEEL		LOAD CAPACITY [kg] *[lb]*						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
										LOAD WHEEL		STEERING WHEEL				
		O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	*9.3*	*42*	*10.2*	*14.6*	*99.3*			-	*8885*	*6835*	*8900*	*8100*	*6850*	*10350*
33x12-20	7.50	831	287	40	326	396	2677	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	*11.3*	*50*	*12.8*	*15.6*	*105.4*			-	*11465*	*8820*	*11500*	*10400*	8850	13350
36x14-20	7.50	910	320	43	345	426	2860	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	*12.6*	*54*	*13.6*	*16.8*	*112.6*			-	*13650*	*10500*	*13650*	*12350*	10500	15850



CAMSO SKS 786S

Formerly Solideal Safetymaster SM

SOLID HARD SURFACE DURABILITY

FEATURES

- Full solid construction
- Full-width footprint
- Reusable wheel

BENEFITS

- Provides excellent durability and flat-free operation
- Provides excellent stability and tread life
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] *[inches]*						HEEL		LOAD CAPACITY [kg] *[lb]*						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
										LOAD WHEEL		STEERING WHEEL				
		O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	*9.3*	*42*	*10.2*	*14.6*	*99.3*			-	*8885*	*6835*	*8900*	*8100*	*6850*	*10350*
33x12-20	7.50	831	287	40	326	396	2677	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	*11.3*	*50*	*12.8*	*15.6*	*105.4*			-	*11465*	*8820*	*11500*	*10400*	8850	13350
36x14-20	7.50	909	326	43	360	429	2905	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	*12.8*	*54*	*14.2*	*16.9*	*114.4*			-	*13650*	*10500*	*13650*	*12350*	10500	15850



CAMSO BHL 753

Formerly Solideal BHZ

DURABILITY MEETS RIDE QUALITY

FEATURES

- Non-directional tread pattern with high lug-to-void ratio
- Optimized. continuous-contact tread pattern
- Non-directional tread pattern with high lug-to-void ratio
- Tapered tread lugs

BENEFITS

- Ensures even tread wearing for greater durability
- Significantly reduces vibration for improved ride quality
- Protects against tread impacts and punctures
- Improves lug stability for even wearing

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
12-16.5	12	9.75	-	826	319	18	339	378	2489	TBLS	145	A2	R-4	5.60	4550	3310	2880	2280
				32.5	*12.6*	*23*	*13.4*	*14.9*	*98.0*					*80*	*10050*	*7300*	*6350*	*5050*
12.5/80-18 (320/80-18)	12	W9x18	11x18	984*	310*	24*	343	-	-	TBLS	129	A6	R-4	3.70	4375	-	2410	2240
				38.7	*12.2*	*30*	*13.5*	-	-					*53*	*9650*	-	*5300*	*4950*
				984*	310*	24*	343	-	-	TBLS	142			3.70	4375	-	3450	3205
				38.7	*12.2*	*30*	*13.5*	-	-					*53*	*9650*	-	*7600*	*7100*
19.5L-24 (500/70-24)	12	DW16Ax24	W16x24	1316*	503*	25*		-	-	TBLS	151	A8	R-4	2.30	7935	-	5240	4625
				51.8	*19.8*	*31*	-	-	-					*33*	*17500*	-	*11550*	*10200*
				1316*	503*	25*		-	-	TBLS				2.30	7935	-	4450	3900
				51.8	*19.8*	*31*	-	-	-					*33*	*17500*	-	*9800*	*8600*
18.4-26 (480/80-26)	12	W16Lx26	DW16A. W15Lx26	1418*	482*	26*		-	-	TBLS/ TT	156	A8	R-4	2.50	9200	-	5840	5360
				55.8	*19.0*	*33*	*0.0*	-	-					*36*	*20300*	-	*12900*	*11850*
				1418*	482*	26*		-	-	TBLS/ TT				2.50	9200	-	4830	4520
				55.8	*19.0*	*33*	*0.0*	-	-					*36*	*20300*	-	*10650*	*10000*
16.9-28 (440/80-28)	12	W15Lx28	W14Lx28	1404*	445*	28*	547	-	-	TBLS/ TT	152	A8	R-4	2.60	8165	-	5180	3800
				55.3	*17.5*	*35*	*21.5*	-	-					*37*	*18000*	-	*11450*	*8400*
				1404*	445*	28*	547	-	-	TBLS/ TT				2.60	8165	-	4290	3690
				55.3	*17.5*	*35*	*21.5*	-	-					*37*	*18000*	-	*9450*	*8150*



CAMSO SL R4

HEAVY-DUTY DURABILITY AND TRACTION

FEATURES

- Heavy-duty carcass
- Optimized lug-to-void ratio with extra-deep tread
- Hauler stepped tread design

BENEFITS

- Improves stability and side impact resistance
- Increases tread life and off-road traction
- Improves self-cleaning and stone ejection for excellent traction

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
				873.0	282.0	22	283.0	401.0	2550.0		119			4	3220	-	1770	1645
10.5/80-18	10	W9x18	W8x18. 9x18	*34.4*	*11.1*	*28*	*11.1*	*15.8*	*100.4*	TBLS		A6	R-4	*53*	*7100*	-	*3900*	*3650*
				873.0	282.0	22	283.0	401.0	2550.0		131			4	3220	-	2540	2360
				34.4	*11.1*	*28*	*11.1*	*15.8*	*100.4*					*53*	*7100*	-	*5600*	*5200*
				958.0	292.0	27	344.0	423.0	2836.0		129			4	4375	-	2410	2240
12.5/80-18	12	W9x18	11x18	*37.7*	*11.5*	*34*	*13.5*	*16.7*	*111.7*	TBLS		A6	R-4	*53*	*9650*	-	*5300*	*4950*
				958.0	292.0	27	344.0	423.0	2836.0		142			4	4375	-	3450	3205
				37.7	*11.5*	*34*	*13.5*	*16.7*	*111.7*					*53*	*9650*	-	*7600*	*7100*
				950.0	292.0	27	318.0	442.0	2823.0		134			4	4980	-	2760	2565
12.5/80-18	14	W9x18	11x18	*37.4*	*11.5*	*34*	*12.5*	*17.4*	*111.1*	TBLS		A6	R-4	*61*	*11000*	-	*6100*	*5650*
				950.0	292.0	27	318.0	442.0	2823.0		146			4	4980	-	3900	3630
				37.4	*11.5*	*34*	*12.5*	*17.4*	*111.1*					*61*	*11000*	-	*8600*	*8000*
				1238.0	403.0	30	451.0	555.0	3694.0					3	6670	-	4230	3885
14.9-24	12	W13x24	W11x24, W12x24	*48.7*	*15.9*	*38*	*17.8*	*21.9*	*145.4*	TBLS	145	A8	R-4	*41*	*14700*	-	*9350*	*8600*
				1238.0	403.0	30	451.0	555.0	3694.0					3	6670	-	3500	3275
				48.7	*15.9*	*38*	*17.8*	*21.9*	*145.4*					*41*	*14700*	-	*7750*	*7250*
				1300.0	444.0	27	495.0	581.0	3846.0					2.6	7475	-	4745	4355
16.9-24	12	W15Lx24	W14Lx24	*51.2*	*17.5*	*34*	*19.5*	*22.9*	*151.4*	TBLS	149	A8	R-4	*38*	*16500*	-	*10450*	*9600*
				1300.0	444.0	27	495.0	581.0	3846.0					2.6	7475	-	3930	3675
				51.2	*17.5*	*34*	*19.5*	*22.9*	*151.4*					*38*	*16500*	-	*8700*	*8100*
				1258.0	445.0	30	502.0	567.0	3716.0					2	6440	-	4090	3750
17.5L-24	10	W15Lx24	W14Lx24	*49.5*	*17.5*	*38*	*19.8*	*22.3*	*146.3*	TBLS	144	A8	R-4	*31*	*14200*	-	*9050*	*8300*
				1258.0	445.0	30	502.0	567.0	3716.0					2	6440	-	3380	3165
				49.5	*17.5*	*38*	*19.8*	*22.3*	*146.3*					*31*	*14200*	-	*7450*	*7000*
				1243.0	448.0	28	-	559.0	3728.0					3	7475	-	4750	4355
17.5L-24	12	W15Lx24	W14Lx24	*48.9*	*17.6*	*35*	-	*22.0*	*146.8*	TBLS	149	A8	R-4	*37*	*16500*	-	*10500*	*9600*



CAMSO SL R4 (cont.)

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
17.5L-24	12	W15Lx24	W14Lx24	1243.0	448.0	28	-	559.0	3728.0	TBLS	149	A8	R-4	3	7475	-	3930	3675
				48.9	*17.6*	*35*	-	*22.0*	*146.8*					*37*	*16500*	-	*8700*	*8100*
19.5L-24	12	DW16Ax24	W16x24	1312.0	485.0	28	536.0	568.0	3895.0	TBLS	151	A8	R-4	2	7935	-	5240	4625
				51.7	*19.1*	*35*	*21.1*	*22.4*	*153.3*					*33*	*17500*	-	*11550*	*10200*
				1312.0	485.0	28	536.0	568.0	3895.0					2	7935	-	4450	3900
				51.7	*19.1*	*35*	*21.1*	*22.4*	*153.3*					*33*	*17500*	-	*9800*	*8600*
19.5L-24	14	DW16Ax24	W16x24	1322.0	505.0	28	-	576.0	3932.0	TBLS	155	A8	R-4	3	8915	-	5890	5195
				52.0	*19.9*	*35*	-	*22.7*	*154.8*					*37*	*19700*	-	*13000*	*11450*
				1322.0	505.0	28	-	576.0	3932.0					3	8915	-	5000	4380
				52.0	*19.9*	*35*	-	*22.7*	*154.8*					*37*	*19700*	-	*11050*	*9650*
21L-24	12	DW18Ax24	W18Lx24	1390.0	534.0	38	521.0	614.0	4072.0	TBLS	155	A8	R-4	2	8915	-	5660	5195
				54.7	*21.0*	*48*	*20.5*	*24.2*	*160.3*					*31*	*19700*	-	*12500*	*11450*
				1390.0	534.0	38	521.0	614.0	4072.0					2	8915	-	4680	4380
				54.7	*21.0*	*48*	*20.5*	*24.2*	*160.3*					*31*	*19700*	-	*10350*	*9650*
18.4-26	12	W16Lx26	DW16A. W15Lx26	1430.0	494.0	28	541.0	635.0	4270.0	TBLS	156	A8	R-4	3	9200	-	5840	5360
				56.3	*19.4*	*35*	*21.3*	*25.0*	*168.1*					*36*	*20300*	-	*12900*	*11850*
				1430.0	494.0	28	541.0	635.0	4270.0					3	9200	-	4830	4520
				56.3	*19.4*	*35*	*21.3*	*25.0*	*168.1*					*36*	*20300*	-	*10650*	*10000*
16.9-28	12	W15Lx28	W14Lx28	1427.0	455.0	33	647.0	647.0	4285.0	TBLS/ TT	152	A8	R-4	3	8165	-	5180	3800
				56.2	*17.9*	*42*	*25.5*	*25.5*	*168.7*					*37*	*18000*	-	*11450*	*8400*
				1427.0	455.0	33	647.0	647.0	4285.0					3	8165	-	4290	3690
				56.2	*17.9*	*42*	*25.5*	*25.5*	*168.7*					*37*	*18000*	-	*9450*	*8150*
18.4-28	12	W16Lx28	W15Lx28	1500.0	504.0	39	-	663.0	4414.0	TBLS/ TT	157	A8	R-4	3	9490	-	6020	5530
				59.1	*19.8*	*49*	-	*26.1*	*173.8*					*36*	*20950*	-	*13300*	*12200*
				1500.0	504.0	39	-	663.0	4414.0					3	9490	-	4980	4660
				59.1	*19.8*	*49*	-	*26.1*	*173.8*					*36*	*20950*	-	*11000*	*10300*
16.9-30	14	W15Lx30	W14Lx30	1444.0	444.0	31	-	670.0	4310.0	TBLS/ TT	154	A8	R-4	3	8625	-	5475	5025
				56.9	*17.5*	*39*	-	*26.4*	*169.7*					*41*	*19050*	-	*12100*	*11100*
				1444.0	444.0	31	-	670.0	4310.0					3	8625	-	4530	4240
				56.9	*17.5*	*39*	-	*26.4*	*169.7*					*41*	*19050*	-	*10000*	*9350*



CAMSO BHL 532

Formerly Solideal SLA R4

ROADING COMFORT AND OFF-ROAD TRACTION

FEATURES

- Engineered low-vibration tread design
- Continuous multi-angle tread lugs
- Hauler stepped tread design

BENEFITS

- Minimizes vibrations for improved ride quality
- Minimizes vibrations for improved ride quality
- Improves self-cleaning and stone ejection for excellent traction

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
14.9-24	12	W13x24	W11x24. W12x24	1221	394	25	434	548	3644	TBLS	145	A8	R-4	2.90	6670	-	4230	3885
				48.1	*15.5*	*31*	*17.1*	*21.6*	*143.5*					*41*	*14700*	-	*9350*	*8600*
				1221	394	25	434	548	3644					2.90	6670	-	3500	3275
				48.1	*15.5*	*31*	*17.1*	*21.6*	*143.5*					*41*	*14700*	-	*7750*	*7250*
16.9-24	12	W15Lx24	W14Lx24	1281	450	27	-	578	3823	TBLS	149	A8	R-4	2.60	7475	-	4745	4355
				50.4	*17.7*	*34*	-	*22.8*	*150.5*					*38*	*16500*	-	*10450*	*9600*
				1281	450	27	-	578	3823					2.60	7475	-	3930	3675
				50.4	*17.7*	*34*	-	*22.8*	*150.5*					*38*	*16500*	-	*8700*	*8100*
17.5L-24	10	W15Lx24	W14Lx24	1243	445	25	481	546	3709	TBLS	144	A8	R-4	2.20	6440	-	4090	3750
				48.9	*17.5*	*31*	*18.9*	*21.5*	*146.0*					*31*	*14200*	-	*9050*	*8300*
				1243	445	25	481	546	3709					2.20	6440	-	3380	3165
				48.9	*17.5*	*31*	*18.9*	*21.5*	*146.0*					*31*	*14200*	-	*7450*	*7000*
19.5L-24	12	DW16Ax24	W16x24	1320	495	26	-	585	3978	TBLS	151	A8	R-4	2.30	7935	-	5240	4625
				52.0	*19.5*	*33*	-	*23.0*	*156.6*					*33*	*17500*	-	*11550*	*10200*
				1320	495	26	-	585	3978					2.30	7935	-	4450	3900
				52.0	*19.5*	*33*	-	*23.0*	*156.6*					*33*	*17500*	-	*9800*	*8600*
21L-24	12	DW18Ax24	W18Lx24	1377	534	28	580	601	4110	TBLS	155	A8	R-4	2.20	8915	-	5660	5195
				54.2	*21.0*	*35*	*22.8*	*23.7*	*161.8*					*31*	*19700*	-	*12500*	*11450*
				1377	534	28	580	601	4110					2.20	8915	-	4680	4380
				54.2	*21.0*	*35*	*22.8*	*23.7*	*161.8*					*31*	*19700*	-	*10350*	*9650*
18.4-26	12	W16Lx26	DW16A. W15Lx26	1449	490	26	525	626	4269	TBLS/ TT	156	A8	R-4	2.50	9200	-	5840	5360
				57.0	*19.3*	*33*	*20.7*	*24.6*	*168.1*					*36*	*20300*	-	*12900*	*11850*
				1449	490	26	525	626	4269					2.50	9200	-	4830	4520
				57.0	*19.3*	*33*	*20.7*	*24.6*	*168.1*					*36*	*20300*	-	*10650*	*10000*
16.9-28	12	W15Lx28	W14Lx28	1417	455	28	547	621	4224	TBLS/ TT	152	A8	R-4	2.60	8165	-	5180	3800
				55.8	*17.9*	*35*	*21.5*	*24.4*	*166.3*					*37*	*18000*	-	*11450*	*8400*
				1417	455	28	547	621	4224					2.60	8165	-	4290	3690
				55.8	*17.9*	*35*	*21.5*	*24.4*	*166.3*					*37*	*18000*	-	*9450*	*8150*



CAMSO 4L R1

ROADING COMFORT AND OFF-ROAD TRACTION

FEATURES

- Aggressive curved R1 tread pattern
- Hauler stepped tread design
- Robust carcass design

BENEFITS

- Maximizes traction and improves ride quality
- Maximizes tread cleanout in off-road conditions for improved traction
- Improves stability and side impact resistance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*					LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] *[lb]*				
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	S.L.R.	R.C.							STATIC	8 km/h *5 mph*	16 km/h *10 mph*	40 km/h *25 mph*	50 km/h *30 mph*
10.0/75-15.3	8	TT / TBLS	9x15.3	-	795	261	22	344	2373	119	A8	R-4	3.10	DUMPER	FREE	2245	1905	1810	-	1225
					31.3	*10.3*	*28*	*13.5*	*93.4*				*44*			*4950*	*4200*	*4000*	-	*2700*
					795	261	22	344	2373	106			3.10		DRIVE	2235	1330	1265	-	855
					31.3	*10.3*	*28*	*13.5*	*93.4*				*44*			*4950*	*2950*	*2800*	-	*1900*
11.5/80-15.3	8	TT / TBLS	9x15.3	-	853	286	23	362	2549	126	A8	R-1	2.70	DUMPER	FREE	2805	2380	2260	-	1530
					33.6	*11.3*	*29*	*14.3*	*100.4*				*39*			*6200*	*5250*	*5000*	-	*3400*
					853	286	23	362	2549	114			2.70		DRIVE	2775	1650	1570	-	1060
					33.6	*11.3*	*29*	*14.3*	*100.4*				*39*			*6150*	*3650*	*3450*	-	*2350*
12.5/80-18	12	TBLS	W9x18	11x18	989.0	312.0	30	450.0	3005.0	129	A6	R-1	4	-	DRIVE	4375	2410	2240	1665	-
					38.9	*12.3*	*38*	*17.7*	*118.3*				*53*			*9650*	*5300*	*4950*	*3700*	-
					989.0	312.0	30	450.0	3005.0	142			4		FREE ROLLING	4375	3450	3205	2385	-
					38.9	*12.3*	*38*	*17.7*	*118.3*				*53*			*9650*	*7600*	*7100*	*5250*	-
18-19.5	16	TT / TBLS	14x19.5	-	1105	448	26	497	3667	160	A8	R-1	4.50	MPT	DRIVE	7425	5850	5400	-	4050
					43.5	17.6	33	19.6	144.4				64			16400	12900	11900	-	8950
405/70-20 (16/70-20)	14	TT / TBLS	13x20	13SDC	1098	410	34	505	3332	154	A8	R-1	3.50	MPT	FREE	6190	5250	4990	-	3375
					43.2	*16.1*	*43*	*19.9*	*131.2*				*50*			*13650*	*11600*	*11000*	-	*7450*
					1098	410	34	505	3332	142			3.50		DRIVE	6230	3710	3525	-	2385
					43.2	*16.1*	*43*	*19.9*	*131.2*				*50*			*13750*	*8200*	*7800*	-	*5250*
18-22.5	16	TT / TBLS	14x22.5	-	1105	448	28	494	3667	163	A8	R1	4.50	MPT	DRIVE	8045	6340	5850	-	4390
					43.5	17.6	35	19.4	144.4				64			17750	14000	12900	-	9700
405/70-24 (16/70-24)	14	TT / TBLS	13x24	13SDC	1202	406	27	543	3587	156	A8	R-1	2.70	MPT	FREE	6600	5600	5320	-	3600
					47.3	*16.0*	*34*	*21.4*	*141.2*				*39*			*14550*	*12350*	*11750*	-	*7950*
					1202	406	27	543	3587	144			2.70		DRIVE	6580	3920	3725	-	2520
					47.3	*16.0*	*34*	*21.4*	*141.2*				*39*			*14550*	*8650*	*8200*	-	*5550*



CAMSO 4L R1 (cont.)

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*					LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] *[lb]*				
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	S.L.R.	R.C.							STATIC	8 km/h *5 mph*	16 km/h *10 mph*	40 km/h *25 mph*	50 km/h *30 mph*
15.5/80-24	12	TT / TBLS	13x24	W12/W13/ W14L	1297	411	40	550	3852	157	A8	R-1	3.00	MPT	FREE	2245	1905	1810	-	1225
					51.1	*16.2*	*50*	*21.7*	*151.7*				*43*			*4950*	*4200*	*4000*	-	*2700*
					1297	411	40	550	3852	145			3.00		DRIVE	2235	1330	1265	-	855
					51.1	*16.2*	*50*	*21.7*	*151.7*				*43*			*4950*	*2950*	*2800*	-	*1900*
15.5/80-24	14	TT / TBLS	13x24	W12/W13/ W14L	1294	402	40	551	3864	160	A8	R-1	3.50	MPT	FREE	2805	2380	2260	-	1530
					50.9	*15.8*	*50*	*21.7*	*152.1*				*50*			*6200*	*5250*	*5000*	-	*3400*
					1294	402	40	551	3864	148			3.50		DRIVE	2775	1650	1570	-	1060
					50.9	*15.8*	*50*	*21.7*	*152.1*				*50*			*6150*	*3650*	*3450*	-	*2350*
16.5/85-24	8	TBLS	13x24	W13/W14L/ W15L	1327	417	26	575	4026	154	A8	R-1	1.90	MPT	FREE	6190	5250	4990	-	3375
					52.2	*16.4*	*33*	*22.6*	*158.5*				*27*			*13650*	*11600*	*11000*	-	*7450*
					1327	417	26	575	4026	142			1.90		DRIVE	6230	3710	3525	-	2385
					52.2	*16.4*	*33*	*22.6*	*158.5*				*27*			*13750*	*8200*	*7800*	-	*5250*
16.5/85-24	14	TT / TBLS	13x24	W13/W14L/ W15L	1327	428	25	256	3998	165	A8	R-1	3.30	MPT	FREE	8500	7210	6850	-	4635
					52.2	*16.9*	*31*	*10.1*	*157.4*				*47*			*18750*	*15900*	*15100*	-	*10250*
					1327	428	25	256	3998	153			3.30		DRIVE	8580	5110	4855	-	3285
					52.2	*16.9*	*31*	*10.1*	*157.4*				*47*			*18950*	*11300*	*10700*	-	*7250*



CAMSO BHL 530

Formerly Solideal MR F3

PERFORMANCE AND QUALITY YOU CAN RELY ON

FEATURES

- Engineered F3 rib tread design
- Robust carcass
- Deep tread depth

BENEFITS

- Provides smooth ride and effective steering
- Reduces tread crowning for even wearing and excellent stability
- Enhances longevity

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
11L-15SL	10	8LBx15	10LBx15	768	280	13.5	278	362	2397	TBLS	118	B	F-3	3.00	2640	-	-	-
				30.2	11.0	17	10.9	14.3	94.4					42.86	5850	-	-	-
11L-16SL	12	8LBx16	W8L. 10LB. W10Lx16	802	262	13.5	278	358	2397	TBLS	123	B	F-3	3.60	3110	-	-	-
				31.6	10.3	17	10.9	14.1	94.4					51.43	6850	-	-	-
14.5/75-16.1SL	10	W11Cx16.1	-	940	361	17	391	417	2706	TBLS	121	A8	F-3	2.80	4350	-	2480	2175
				37.0	14.2	21	15.4	16.4	106.5					40.00	9600	-	5450	4800



CAMSO TLH 792S

Formerly Solideal SolidAir TLH

EXTREME-DUTY FLAT-FREE TIRE SOLUTION

FEATURES

- Engineered solid tire solution
- Patented triangular aperture design
- Massive tread depth
- Hauler stepped tread design

BENEFITS

- Provides flat-free operation and ultimate durability
- Optimizes stability, strength and comfort
- Improves durability and traction
- Provides excellent cleanout for improved traction

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] *[inches]*						HEEL		LOAD CAPACITY [kg] *[lb]*						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
										LOAD WHEEL		STEERING WHEEL				
		O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
13.00-24	8.50V	1290	330	70	377	595	4027	-	■	-	-	-	7650	6950	6375	9625
		50.8	*13.0*	*88*	*14.8*	*23.4*	*158.5*			-	-	-	*16900*	*15350*	*14050*	*21250*
14.00-24	8.50V	1330	350	88	394	617	4164	-	■	-	-	-	8460	7685	7050	10645
		52.4	*13.8*	*111*	*15.5*	*24.3*	*163.9*			-	-	-	*18700*	*16950*	15550	23500



CAMSO SL G3

MULTI-SURFACE STABILITY AND PERFORMANCE

FEATURES

- Extra-deep non-directional tread pattern
- Optimized lug-to-void ratio
- Heavy-duty sidewall construction
- Flatter tread profile

BENEFITS

- Optimizes durability and traction on mixed and hard surfaces
- Provides excellent traction for mixed and hard surface applications
- Provides superior side impact resistance and stability
- Resists tread crowning for even wearing

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1303	367	28	413	576	3832	143	A8	GRADER	G-3
					51.3	*14.4*	*35*	*16.3*	*22.7*	*150.9*				
					1303	367	28	413	576	3832	168	A2	LOADER-DOZER	L-3
					51.3	*14.4*	*35*	*16.3*	*22.7*	*150.9*				
14.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1354	385	30	445	592	3998	147	A8	GRADER	G-3
					53.3	*15.2*	*38*	*17.5*	*23.3*	*157.4*				
					1354	385	30	445	592	3998	166	A2	LOADER-DOZER	L-3
					53.3	*15.2*	*38*	*17.5*	*23.3*	*157.4*				
14.00-24 TG	16	TT / TBLS	10.00VA	-	1338	393	30	428	622	3993	153	A8	GRADER	G-3
					52.7	*15.5*	*38*	*16.9*	*24.5*	*157.2*				
					1338	393	30	428	622	3993	177	A2	LOADER-DOZER	L-3
					52.7	*15.5*	*38*	*16.9*	*24.5*	*157.2*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																				
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-
3750	*4200*	*4550*	*4950*	*5200(10)*	*5500*	*5850*	*6000(12)*	*6200(14)*	*6400(16)*	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)
-	-	-	-	-	-	-	-	*9950*	*10500*	*11050(10)*	*11350*	*11700*	*12350(12)*	*12350*	*12800*	*13250(14)*	*13600*	*13900*	*14350(16)*
2060	2300	2500	2650	2800	3075(12)	3250	3450(14)	3550	3650(16)	-	-	-	-	-	-	-	-	-	-
4550	*5100*	*5500*	*5850*	*6200*	*6800(12)*	*7150*	*7600(14)*	*7850*	*8050(16)*	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	5450	5600(10)	6000	6150	6300(12)	6500	6700(14)	6900	7100	7300(16)	-	-
-	-	-	-	-	-	-	-	*12050*	*12350(10)*	*13250*	*13600*	*13900(12)*	*14350*	*14800(14)*	*15250*	*15650*	*16100(16)*	-	-
2060	2300	2500	2650	2800	3075(12)	3250	3450(14)	3550	3650(16)	-	-	-	-	-	-	-	-	-	-
4550	*5100*	*5500*	*5850*	*6200*	*6800(12)*	*7150*	*7600(14)*	*7850*	*8050(16)*	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	5450	5600(10)	6000	6150	6300(12)	6500	6700(14)	6900	7100	7300(16)	-	-
-	-	-	-	-	-	-	-	*12050*	*12350(10)*	*13250*	*13600*	*13900(12)*	*14350*	*14800(14)*	*15250*	*15650*	*16100(16)*	-	-



CAMSO SL G2

HEAVY-DUTY OFF-ROAD DURABILITY AND TRACTION

FEATURES

- Extra-deep tread pattern
- Hauler stepped tread design
- Heavy-duty sidewall construction
- Flatter tread profile

BENEFITS

- Provides best durability and traction in off-road conditions
- Provides excellent cleanout for improved traction
- Provides superior side impact resistance and stability
- Resists tread crowning for even wearing

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1261	358	22	413	559	3789	143	A8	GRADER	G-2
					49.6	*14.1*	*28*	*16.3*	*22.0*	*149.2*				
					1261	358	22	413	559	3789	168	A2	LOADER-DOZER	L-2
					49.6	*14.1*	*28*	*16.3*	*22.0*	*149.2*				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1324	384	22	411	569	3982	147	A8	GRADER	G-2
					52.1	*15.1*	*28*	*16.2*	*22.4*	*156.8*				
					1324	384	22	411	569	3982	166	A2	LOADER-DOZER	L-2
					52.1	*15.1*	*28*	*16.2*	*22.4*	*156.8*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																				
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-
3750	*4200*	*4550*	*4950*	*5200(10)*	*5500*	*5850*	*6000(12)*	*6200(14)*	*6400(16)*	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)
-	-	-	-	-	-	-	-	*9950*	*10500*	*11050(10)*	*11350*	*11700*	*12350(12)*	*12350*	*12800*	*13250(14)*	*13600*	*13900*	*14350(16)*
2060	2300	2500	2650	2800	3075(12)	3250	3450(14)	3550	3650(16)	-	-	-	-	-	-	-	-	-	-
4550	*5100*	*5500*	*5850*	*6200*	*6800(12)*	*7150*	*7600(14)*	*7850*	*8050(16)*	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	5450	5600(10)	6000	6150	6300(12)	6500	6700(14)	6900	7100	7300(16)	-	-
-	-	-	-	-	-	-	-	*12050*	*12350(10)*	*13250*	*13600*	*13900(12)*	*14350*	*14800(14)*	*15250*	*15650*	*16100(16)*	-	-



CAMSO TLH 532

Formerly Solideal TH2

HIGH QUALITY FOR STANDARD DUTY

FEATURES

- Deep tread pattern
- Optimized tread pattern
- Flatter tread profile

BENEFITS

- Enhances durability and traction
- Provides good traction in off-road conditions
- Resists tread crowning for even wearing

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1303	367	28	413	576	3832	143	A8	GRADER	G-3
					51.3	*14.4*	*35*	*16.3*	*22.7*	*150.9*				
					1303	367	28	413	576	3832	168	A2	LOADER-DOZER	L-3
					51.3	*14.4*	*35*	*16.3*	*22.7*	*150.9*				
14.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1354	385	30	445	592	3998	147	A8	GRADER	G-3
					53.3	*15.2*	*38*	*17.5*	*23.3*	*157.4*				
					1354	385	30	445	592	3998	166	A2	LOADER-DOZER	L-3
					53.3	*15.2*	*38*	*17.5*	*23.3*	*157.4*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																				
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-
3750	*4200*	*4550*	*4950*	*5200(10)*	*5500*	*5850*	*6000(12)*	*6200(14)*	*6400(16)*	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)
-	-	-	-	-	-	-	-	*9950*	*10500*	*11050(10)*	*11350*	*11700*	*12350(12)*	*12350*	*12800*	*13250(14)*	*13600*	*13900*	*14350(16)*
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-
3750	*4200*	*4550*	*4950*	*5200(10)*	*5500*	*5850*	*6000(12)*	*6200(14)*	*6400(16)*	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)
-	-	-	-	-	-	-	-	*9950*	*10500*	*11050(10)*	*11350*	*11700*	*12350(12)*	*12350*	*12800*	*13250(14)*	*13600*	*13900*	*14350(16)*



CAMSO TM R4

DURABLE OFF-ROAD PERFORMANCE

FEATURES

- Hauler stepped tread design
- Tapered tread lugs
- Optimized lug-to-void ratio
- Heavy-duty carcass

BENEFITS

- Enhances tread cleanout for improved traction
- Improves lug stability for even wearing
- Enhances longevity and tread puncture resistance
- Provides excellent stability and side impact resistance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*					LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] *[lb]*				
			Recom-mended	Alterna-tive	O.D.	O.W.	O.T.D. [mm] *[32nd]*	S.L.R.	R.C.							STATIC	8 km/h *5 mph*	16 km/h *10 mph*	40 km/h *25 mph*	50 km/h *30 mph*
18-19.5	16	TT / TBLS	14x19.5	-	1117	454	32	505	3352	160	A8	R-4	4.50	MPT	DRIVE	9090	6300	5985	-	4050
					44.0	*17.9*	*40*	*19.9*	*132.0*				*64*			*20050*	*13900*	*13200*	-	*8950*
405/70-20 (16/70-20)	14	TT / TBLS	13x20	13SDC	1085	403	27	490	3238	154	A8	R-4	3.50	MPT	FREE	6190	5250	4990	-	3375
					42.7	*15.9*	*34*	*19.3*	*127.5*				*50*			*13650*	*11600*	*11000*	-	*7450*
					1085	403	27	490	3238	142			3.50		DRIVE	6230	3710	3525	-	2385
					42.7	*15.9*	*34*	*19.3*	*127.5*				*50*			*13750*	*8200*	*7800*	-	*5250*
18-22.5	16	TT / TBLS	14x22.5	-	1209	444	35	545	3638	163	A8	R-4	4.50	MPT	DRIVE	9850	6825	6485	-	4390
					47.6	*17.5*	*44*	*21.5*	*143.2*				*64*			*21750*	*15050*	*14300*	-	*9700*
400/80-24 (15.5/80-24)	16	TBLS	13x24	13SDC	1244	411	37	572	3756	156	A8	R-4	4.00	MPT	CONSTANT	6190	5250	4990	-	3375
					49.0	*16.2*	*47*	*22.5*	*147.9*				*57*			*13650*	*11600*	*11000*	-	*7450*
					1244	411	37	572	3756	156			4.00		CYCLIC	6230	3710	3525	-	2385
					49.0	*16.2*	*47*	*22.5*	*147.9*				*57*			*13750*	*8200*	*7800*	-	*5250*
400/80-24 (15.5/80-24)	20	TBLS	13x24	13SDC	1238	409	37	568	3771	162	A8	R-4	5.00	MPT	CONSTANT	10925	5940	5370	-	4560
					48.7	*16.1*	*47*	*22.4*	*148.5*				*71*			*24100*	*13100*	*11850*	-	*10050*
					1238	409	37	568	3771	162			5.00		CYCLIC	10925	7125	6365	-	4560
					48.7	*16.1*	*47*	*22.4*	*148.5*				*71*			*24100*	*15750*	*14050*	-	*10050*
440/80-24 (16.5/85-24)	22	TBLS	DW14Lx24	DW13/DW13L/ DW15L	1328	453	33	600	4016	168	A8	R-4	5.00	MPT	CONSTANT	12880	7000	6330	-	5375
					52.3	*17.8*	*42*	*23.6*	*158.1*				*71*			*28396*	*15679*	*14074*	-	*11850*
					1328	453	33	600	4016	168			5.00		CYCLIC	12880	8400	7505	-	5375
					52.3	*17.8*	*42*	*23.6*	*158.1*				*71*			*28396*	*19136*	*16420*	-	*11850*
460/70-24 IND	-	TL	DW15L	DW14L/DW16L/ TW14L/ TW15L/ TW16L	1261	454	30	-	-	159	A8	R-4	5.00	IND. TRACTOR	CYCLIC	10065	7305	6565	4855	4680
					49.6	*17.9*	*39*	-	-				*71*			*22190*	*16105*	*14475*	*10705*	*10320*
					1261	454	30	-	-	159			5.00		CONSTANT	10065	6345	5470	4640	4550
					49.6	*17.9*	*39*	-	-				*71*			*22190*	*13990*	*12060*	*10230*	*10030*



CAMSO 4L I3

A SMOOTH RIDE WITH ENHANCED TRACTION

FEATURES

- Versatile directional tread pattern with center block
- Hauler stepped tread design
- Open shoulder tread design
- Heavy-duty carcass

BENEFITS

- Reduces vibrations and enhances driving comfort
- Maximizes tread cleanout in off-road conditions for improved traction
- Provides excellent traction in off-road conditions
- Provides excellent stability and side impact resistance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*					LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] *[PSI]*	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] *[lb]*						
			Recom-mended	Alterna-tive	O.D.	O.W.	O.T.D. [mm] *[32nd]*	S.L.R.	R.C.						STATIC	10 km/h *6 mph*	15 km/h *9 mph*	25 km/h *15 mph*	30 km/h *18 mph*	40 km/h *24 mph*	50 km/h *30 mph*
10.0/75-15.3	8	TT / TBLS	9x15.3	-	797	265	29	119	4016	119	A8	3.10	MPT	FREE	2245	1905	1810	1620	1525	1360	1225
					31.4	*10.4*	*37*	*23.6*	*158.1*			*45*			*4950*	*4200*	*3990*	*3570*	*3360*	*3000*	*2700*
					797	265	29	106	4016	106		3.10		DRIVE	2245	1330	1265	1130	1065	950	855
					31.4	*10.4*	*37*	*23.6*	*158.1*			*45*			*4950*	*2935*	*2785*	*2495*	*2345*	*2095*	*1885*
11.5/80-15.3	10	TT / TBLS	9x15.3	-	847	294	25	400	2582	131	A8	3.40	MPT	FREE	3220	2730	2595	2320	2185	1950	1755
					33,3	*11,6*	*31*	*15,7*	*101,7*			*49*			*7100*	*6020*	*5720*	*5115*	*4815*	*4300*	*3870*
					847	294	25	400	2582	119		3.40		DRIVE	3220	1905	1810	1620	1525	1360	1225
					33,3	*11,6*	*31*	*15,7*	*101,7*			*49*			*7100*	*4200*	*3990*	*3570*	*3360*	*3000*	*2700*
10.5-18	10	TT / TBLS	9x18	9SDC	891	269	25	393	2650	126	B	3.75	MPT	-	4875	3510	3200	-	2805	1905	2185
					35.1	10.6	31	15.5	104.3			54			10750	7750	7050	-	6200	4200	4800
12.5-18	12	TT / TBLS	11x18	11SDC 12SDC 12	989	335	22	-	-	131	B	3.50	MPT	-	4250	-	-	-	3200	2185	1905
					38,9	*13,2*	*28*	-	-			*50*			*10750*	-	-	-	*7050*	*4800*	*4450*
10.5-20	10	TT / TBLS	9x20	9SDC	950	278	22	423	2825	128	B	3.50	MPT	-	4500	3240	2970	-	2970	2015	2015
					37.4	*10.9*	*28*	*16.7*	*111.2*			*50*			*9950*	*7150*	*6550*	-	*6550*	*4450*	*4450*
12.5-20	12	TT / TBLS	11x20	11SDC 12SDC 12	1054	348	23	471	3138	132	B	3.50	MPT	-	5000	3600	3300	-	3300	2240	2240
					41.5	13.7	29	18.5	123.5			50			11050	7950	7300	-	7300	4950	4950
14.5-20	14	TT / TBLS	11x20	11SDC 12SDC 12	1107	359	27	490	3277	138	B	3.50	MPT	-	5900	4250	3895	-	3895	2645	2645
					43.6	*14.1*	*34*	*19.3*	*129.0*			*50*			*13000*	*9400*	*8600*	-	*8600*	*5850*	*5850*
405/70-20 (16/70-20)	14	TT / TBLS	13x20	13SDC	1081	442	26	503	3183	154	A8	3.50	MPT	FREE	6190	5250	4990	-	4990	3375	3375
					42.6	*17.4*	*33*	*19.8*	*125.3*			*50*			*13650*	*11600*	*11000*	-	*11000*	*7450*	*7450*
					1081	442	26	503	3183	142		3.50		DRIVE	6230	3710	3525	-	3525	2385	2385
					1.7	*0.7*	*33*	*0.8*	*4.9*			*50*			*13750*	*8200*	*7800*	-	*7800*	*5250*	*5250*
405/70-24 (16/70-24)	14	TT / TBLS	13x24	13SDC	1188	421	27	600	4016	156	A8	3.50	MPT	FREE	6600	5600	5320	-	5320	3600	3600
					46.8	*16.6*	*34*	*23.6*	*158.1*			*50*			*14550*	*12350*	*11750*	-	*11750*	*7950*	*7950*
					1188	421	27	600	4016	144		3.50		DRIVE	6580	3920	3725	-	3725	2520	2520
					46.8	*16.6*	*34*	*23.6*	*158.1*			*50*			*14550*	*8650*	*8200*	-	*8200*	*5550*	*5550*



CAMSO
WHL 753R

Formerly Solideal SRGP

RADIAL PERFORMANCE. VERSATILITY AND DURABILITY

FEATURES

- Heavy-duty Dual-Star carcass
- Optimized tread pattern
- Offset. tapered tread lugs
- Non-directional stepped design

BENEFITS

- Enhances stability and suitability for both one-star and two-star applications
- Provides excellent durability and low wear rate
- Reduces vibration for improved ride quality
- Enhances cleanout for improved traction

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
17.5R25	DUAL STAR® */**	TBLS	14.00/1.5	14.00/1.3 (DC); 13.00/1.4 (DC)	1348	469	28	-	601	4023	182	A2	LOADER - DOZER	L-3
					53.1	*18.5*	*35*	-	*23.7*	*158.4*				
					1348	469	28	-	601	4023	167	B	EARTHMOVER	E-3
					53.1	*18.5*	*35*	-	*23.7*	*158.4*				
					1348	469	28	-	601	4023	153	A8	GRADER	G-3
					53.1	*18.5*	*35*	-	*23.7*	*158.4*				
20.5R25	DUAL STAR® */**	TBLS	17.00/2.0	-	1492	548	33	-	665	4453	193	A2	LOADER - DOZER	L-3
					58.7	*21.6*	*42*	-	*26.2*	*175.3*				
					1492	548	33	-	665	4453	177	B	EARTHMOVER	E-3
					58.7	*21.6*	*42*	-	*26.2*	*175.3*				
					1492	548	33	-	665	4453	161	A8	GRADER	G-3
					58.7	*21.6*	*42*	-	*26.2*	*175.3*				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1615	624	35	-	720	4820	201	A2	LOADER - DOZER	L-3
					63.6	*24.6*	*44*	-	*28.3*	*189.8*				
					1615	624	35	-	720	4820	185	B	EARTHMOVER	E-3
					63.6	*24.6*	*44*	-	*28.3*	*189.8*				
					1615	624	35	-	720	4820	170	A8	GRADER	G-3
					63.6	*24.6*	*44*	-	*28.3*	*189.8*				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1746	704	40	-	779	5211	209	A2	LOADER - DOZER	L-3
					68.7	*27.7*	*50*	-	*30.7*	*205.2*				
					1746	704	40	-	779	5211	193	B	EARTHMOVER	E-3
					68.7	*27.7*	*50*	-	*30.7*	*205.2*				
29.5R25	DUAL STAR® */**	TBLS	25.00/3.5	-	1870	782	40	-	834	5581	216	A2	LOADER - DOZER	L-3
					73.6	*30.8*	*50*	-	*32.8*	*219.7*				
					1870	782	40	-	834	5581	200	B	EARTHMOVER	E-3
					73.6	*30.8*	*50*	-	*32.8*	*219.7*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	-	3650	4000	4250	4625	4850	5300	5600	5800	6000	6150	6500	6700	7100	7300	7500	7750	8000
-	-	-	*8050*	*8800*	*9350*	*10200*	*10700*	*11700*	*12300*	*12800*	*13200*	*13600*	*14300*	*14800*	*15700*	*16100*	*16500*	*17100*	*17600*
-	-	-	-	-	-	3350	3550	3750	4000	4125	4375	4625	4750	5000	5150	5450	-	-	-
-	-	-	-	-	-	*7400*	*7850*	*8250*	*8800*	*9100*	*9650*	*10200*	*10500*	*11000*	*11400*	*12000*	-	-	-
-	-	2360	2650	2900	3075	3350	3650	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5200*	*5840*	*6400*	*6800*	*7400*	*8050*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	10500	11400	12300	13200	13900	14800	15700	16500	17600	18200	19300	19800	20900	21500	22000	22700	24000
-	-	-	*4750*	*5150*	*5600*	*6000*	*6300*	*6700*	*7100*	*7500*	*8000*	*8250*	*8750*	*9000*	*9500*	*9750*	*10000*	*10300*	*10900*
-	-	-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-
-	-	-	-	-	-	*9650*	*10500*	*11000*	*11700*	*12300*	*12800*	*13600*	*14300*	*14800*	*15200*	*16100*	-	-	-
-	-	3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6950*	*7600*	*8550*	*9100*	*9650*	*10200*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	*13200*	*14300*	*15700*	*17100*	*18200*	*19300*	*20400*	*21500*	*22700*	*23400*	*24700*	*25400*	*26800*	*27600*	*28300*	*29100*	*30000*
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	*12300*	*13200*	*14300*	*14800*	*15700*	*16500*	*17100*	*18200*	*18700*	*19800*	*20400*	-	-	-
-	-	4000	4500	4875	5300	5600	6000	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*8800*	*9900*	*10700*	*11700*	*12300*	*13200*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	*16500*	*18200*	*19800*	*20900*	*22700*	*24000*	*25400*	*26800*	*28300*	*29100*	*30900*	*32000*	*33100*	*34200*	*35300*	*36400*	*37500*
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	*15700*	*16500*	*17600*	*18700*	*19800*	*20900*	*21500*	*22700*	*23400*	*24700*	*25400*	-	-	-
-	-	-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600
-	-	-	-	-	-	-	-	-	-	-	*34200*	*35300*	*37500*	*38600*	*39700*	*41900*	*43000*	*44100*	*45400*
-	-	-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-
-	-	-	-	-	-	*18700*	*20400*	*21500*	*22700*	*24000*	*25400*	*26000*	*27600*	*28300*	*30000*	*30900*	-	-	-



CAMSO WHL 775R

Formerly Solideal SRLD

MULTI-SURFACE DURABILITY AT ITS BEST

FEATURES

- Extra-deep lug tread
- Robust Dual-Star carcass
- Contoured lug base
- Heavy-duty sidewall construction

BENEFITS

- Enhances durability and resistance to flat tires for extreme mixed and hard surface applications
- Provides excellent stability and enhanced loading capacity
- Promotes stone ejection and resistance to cracking
- Protects against side impacts and deformation under heavy load

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
20.5R25	DUAL STAR® */**	TBLS	17.00/2.0	-	1544	517	74	-	704	4637	193	A2	LOADER - DOZER	L-5
					60.8	*20.4*	*93.2*	-	*27.7*	*182.6*				
					1544	517	74	-	704	4637	177	B	EARTHMOVER	L-5
					60.8	*20.4*	*93.2*	-	*27.7*	*182.6*				
					1544	517	74	-	704	4637	161	A8	GRADER	L-5
					60.8	*20.4*	*93.2*	-	*27.7*	*182.6*				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1673	605	80	-	751	5025	201	A2	LOADER - DOZER	L-5
					65.9	*23.8*	*100.8*	-	*29.6*	*197.8*				
					1673	605	80	-	751	5025	185	B	EARTHMOVER	L-5
					65.9	*23.8*	*100.8*	-	*29.6*	*197.8*				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1791	700	86	-	801	5379	209	A2	LOADER - DOZER	L-5
					70.5	*27.6*	*108.3*	-	*31.5*	*211.8*				
					1791	700	86	-	801	5379	193	B	EARTHMOVER	L-5
					70.5	*27.6*	*108.3*	-	*31.5*	*211.8*				
29.5R25	12	TT / TBLS	25.00/3.5	-	1870	782	40	-	834	5581	216	A2	LOADER - DOZER	L-3
					73.6	*30.8*	*50*	-	*32.8*	*219.7*				
					1870	782	40	-	834	5581	200	B	EARTHMOVER	E-3
					73.6	*30.8*	*50*	-	*32.8*	*219.7*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	-	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900
-	-	-	*10500*	*11400*	*12300*	*13200*	*13900*	*14800*	*15700*	*16500*	*17600*	*18200*	*19300*	*19800*	*20900*	*21500*	*22000*	*22700*	*24000*
-	-	-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-
-	-	-	-	-	-	*9650*	*10500*	*11000*	*11700*	*12300*	*12800*	*13600*	*14300*	*14800*	*15200*	*16100*	-	-	-
-	-	3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6950*	*7600*	*8550*	*9100*	*9650*	*10200*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	*13200*	*14300*	*15700*	*17100*	*18200*	*19300*	*20400*	*21500*	*22700*	*23400*	*24700*	*25400*	*26800*	*27600*	*28300*	*29100*	*30000*
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	*12300*	*13200*	*14300*	*14800*	*15700*	*16500*	*17100*	*18200*	*18700*	*19800*	*20400*	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	*16500*	*18200*	*19800*	*20900*	*22700*	*24000*	*25400*	*26800*	*28300*	*29100*	*30900*	*32000*	*33100*	*34200*	*35300*	*36400*	*37500*
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	*15700*	*16500*	*17600*	*18700*	*19800*	*20900*	*21500*	*22700*	*23400*	*24700*	*25400*	-	-	-
-	-	-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600
-	-	-	-	-	-	-	-	-	-	-	*34200*	*35300*	*37500*	*38600*	*39700*	*41900*	*43000*	*44100*	*45400*
-	-	-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-
-	-	-	-	-	-	*18700*	*20400*	*21500*	*22700*	*24000*	*25400*	*26000*	*27600*	*28300*	*30000*	*30900*	-	-	-



CAMSO WHL 776R

Formerly Solideal SRLS

HARD SURFACE DURABILITY AT ITS BEST

FEATURES

- Extra-deep smooth tread
- Robust Dual-Star carcass
- Flat tread profile
- Heavy-duty sidewall construction

BENEFITS

- Best durability and resistance to flat tires for extreme hard surface applications
- Provides excellent stability and enhanced loading capability
- Provides enhanced stability and even wear
- Protects against side impacts and deformation under heavy load

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
17.5R25	DUAL STAR® */**	TBLS	14.00/1.5	14.00/1.3 (DC); 13.00/1.4 (DC)	1402	443	75.2	-	646	4211	182	A2	LOADER - DOZER	L-5
					55.2	*17.4*	*94.7*	-	*25.4*	*165.8*				
					1402	443	75.2	-	646	4211	167	B	EARTHMOVER	L-5
					55.2	*17.4*	*94.7*	-	*25.4*	*165.8*				
					1402	443	75.2	-	646	4211	153	A8	GRADER	L-5
					55.2	*17.4*	*94.7*	-	*25.4*	*165.8*				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1673	623	80	-	762	5025	201	A2	LOADER - DOZER	L-5
					65.9	*24.5*	*101*	-	*30.0*	*197.8*				
					1673	623	80	-	762	5025	185	B	EARTHMOVER	L-5
					65.9	*24.5*	*101*	-	*30.0*	*197.8*				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1785	709	86	-	800	5361	209	A2	LOADER - DOZER	L-5
					70.3	*27.9*	*108*	-	*31.5*	*211.1*				
					1785	709	86	-	800	5361	193	B	EARTHMOVER	L-5
					70.3	*27.9*	*108*	-	*31.5*	*211.1*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	-	3650	4000	4250	4625	4850	5300	5600	5800	6000	6150	6500	6700	7100	7300	7500	7750	8000
-	-	-	*8050*	*8800*	*9350*	*10200*	*10700*	*11700*	*12300*	*12800*	*13200*	*13600*	*14300*	*14800*	*15700*	*16100*	*16500*	*17100*	*17600*
-	-	-	-	-	-	3350	3550	3750	4000	4125	4375	4625	4750	5000	5150	5450	-	-	-
-	-	-	-	-	-	*7400*	*7850*	*8250*	*8800*	*9100*	*9650*	*10200*	*10500*	*11000*	*11400*	*12000*	-	-	-
-	-	2360	2650	2900	3075	3350	3650	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5200*	*5840*	*6400*	*6800*	*7400*	*8050*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	*13200*	*14300*	*15700*	*17100*	*18200*	*19300*	*20400*	*21500*	*22700*	*23400*	*24700*	*25400*	*26800*	*27600*	*28300*	*29100*	*30000*
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	*12300*	*13200*	*14300*	*14800*	*15700*	*16500*	*17100*	*18200*	*18700*	*19800*	*20400*	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	*16500*	*18200*	*19800*	*20900*	*22700*	*24000*	*25400*	*26800*	*28300*	*29100*	*30900*	*32000*	*33100*	*34200*	*35300*	*36400*	*37500*
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	*15700*	*16500*	*17600*	*18700*	*19800*	*20900*	*21500*	*22700*	*23400*	*24700*	*25400*	-	-	-



CAMSO
ADT 753R
Formerly Solideal SRAT

RADIAL PERFORMANCE MEETS HIGH TRACTION

FEATURES
- Heavy-duty Dual-Star carcass
- Non-directional tread pattern with optimized lug-to-void ratio
- Deep tread depth
- Premium rubber compounds

BENEFITS
- Optimizes stability for articulated dump truck applications
- Increases traction and durability in off-road conditions
- Enhances traction in off-road conditions
- Reduces heat build-up

PERFORMANCE
TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
20.5R25	DUAL STAR® */**	TBLS	17.00/2.0	-	1485	524	31	-	663	4460	193	A2	LOADER - DOZER	L-3
					58.5	*20.6*	*39*	-	*26.1*	*175.6*				
					1485	524	31	-	663	4460	177	B	EARTHMOVER	E-3
					58.5	*20.6*	*39*	-	*26.1*	*175.6*				
					1485	524	31	-	663	4460	161	A8	GRADER	G-3
					58.5	*20.6*	*39*	-	*26.1*	*175.6*				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1615	614	29	-	716	4850	201	A2	LOADER - DOZER	L-3
					63.6	*24.2*	*36.5*	-	*28.2*	*190.9*				
					1615	614	29	-	716	4850	185	B	EARTHMOVER	E-3
					63.6	*24.2*	*36.5*	-	*28.2*	*190.9*				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1736	688	33	-	767	5236	209	A2	LOADER - DOZER	L-3
					68.3	*27.1*	*41.6*	-	*30.2*	*206.1*				
					1736	688	33	-	767	5236	193	B	EARTHMOVER	E-3
					68.3	*27.1*	*41.6*	-	*30.2*	*206.1*				
29.5R25	DUAL STAR® */**	TBLS	25.00/3.5	-	1871	777	38	-	817	5619	216	A2	LOADER - DOZER	L-3
					73.7	*30.6*	*47.9*	-	*32.2*	*221.2*				
					1871	777	38	-	817	5619	200	B	EARTHMOVER	E-3
					73.7	*30.6*	*47.9*	-	*32.2*	*221.2*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*

1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	-	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900
-	-	-	*10500*	*11400*	*12300*	*13200*	*13900*	*14800*	*15700*	*16500*	*17600*	*18200*	*19300*	*19800*	*20900*	*21500*	*22000*	*22700*	*24000*
-	-	-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-
-	-	-	-	-	-	*9650*	*10500*	*11000*	*11700*	*12300*	*12800*	*13600*	*14300*	*14800*	*15200*	*16100*	-	-	-
-	-	3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6950*	*7600*	*8550*	*9100*	*9650*	*10200*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	*13200*	*14300*	*15700*	*17100*	*18200*	*19300*	*20400*	*21500*	*22700*	*23400*	*24700*	*25400*	*26800*	*27600*	*28300*	*29100*	*30000*
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	*12300*	*13200*	*14300*	*14800*	*15700*	*16500*	*17100*	*18200*	*18700*	*19800*	*20400*	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	*16500*	*18200*	*19800*	*20900*	*22700*	*24000*	*25400*	*26800*	*28300*	*29100*	*30900*	*32000*	*33100*	*34200*	*35300*	*36400*	*37500*
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	*15700*	*16500*	*17600*	*18700*	*19800*	*20900*	*21500*	*22700*	*23400*	*24700*	*25400*	-	-	-
-	-	-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600
-	-	-	-	-	-	-	-	-	-	-	*34200*	*35300*	*37500*	*38600*	*39700*	*41900*	*43000*	*44100*	*45400*
-	-	-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-
-	-	-	-	-	-	*18700*	*20400*	*21500*	*22700*	*24000*	*25400*	*26000*	*27600*	*28300*	*30000*	*30900*	-	-	-



CAMSO WHL 775

A PREMIUM WHEEL LOADER TIRE DURABILITY SOLUTION

FEATURES

- Extra-deep L5 lug tread
- Heavy-duty carcass
- Heavy-duty sidewall construction
- Contoured lug base

BENEFITS

- Enhances durability and resistance to flat tires for extreme mixed and hard surface applications
- Increases stability and side impact resistance
- Protects against side impacts and deformation under heavy load
- Promotes stone ejection and resistance to cracking

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TL / TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*			LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE	APPLICATION
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*					
17.5-25	16	TL	14.00/1.5	-	1405	448	61	177	A2	LOADER - DOZER	L-5	-
					55.3	*17.6*	*77*					
20.5-25	20	TL	17.00/2.0	-	1566	532	77	186	A2	LOADER - DOZER	L-5	-
					61.7	*20.9*	*97*					
23.5-25	20	TL	19.50/2.5	-	1670	596	87	191	A2	LOADER - DOZER	L-5	-
					65.7	*23.5*	*110*					

MAXIMUM TIRE LOAD [kg] *[lb]*											
INFLATION PRESSURE [bar] *[PSI]*	STATIC	BREAK-OUT	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph
4.75	11700	-	9500	8300	7300	6350	6150	5850	5600	5400	5100
69	*25795*	-	*20945*	*18300*	*16095*	*14000*	*13560*	*12895*	*12345*	*11905*	*11245*
4.50	15200	-	12400	10800	9500	8250	8000	7600	7300	7050	6650
65	*33510*	-	*27335*	*23810*	*20945*	*18190*	*17635*	*16755*	*16095*	*15545*	*14660*
3.75	17400	-	14200	12400	10900	9500	9150	8700	8400	8050	7650
54	*38360*	-	*31305*	*27335*	*24030*	*20945*	*20170*	*19180*	*18520*	*17745*	*16865*



CAMSO LM L3

MULTI-SURFACE PERFORMANCE

FEATURES

- Heavy-duty carcass
- Non-directional tread pattern with optimized lug-to-void ratio
- Stepped tread design
- Deep and flat tread profile

BENEFITS

- Increases side impact resistance and stability
- Ensures even tread wearing for greater durability
- Enhances tread cleanout for improved traction
- Reduces tread crowning for improved durability

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
15.5-25	12	TBLS	12.00/1.3	13.00/1.4 (DC)	1283	417	26	491	578	3852	168	A2	LOADER - DOZER	L-3
					50.5	*16.4*	*33*	*19.3*	*22.8*	*151.7*				
					1283	417	26	491	578	3852	149	B	EARTHMOVER	E-3
					50.5	*16.4*	*33*	*19.3*	*22.8*	*151.7*				
					1283	417	26	491	578	3852	142	A8	GRADER	G-3
					50.5	*16.4*	*33*	*19.3*	*22.8*	*151.7*				
15.5-25	16	TBLS	-	12.00/1.3 13.00/1.4 (DC)	1285	407	26	473	581	3898	175	A2	LOADER - DOZER	L-3
					50.6	*16.0*	*33*	*18.6*	*22.9*	*153.5*				
					1285	407	26	473	581	3898	156	B	EARTHMOVER	E-3
					50.6	*16.0*	*33*	*18.6*	*22.9*	*153.5*				
					1285	407	26	473	581	3898	146	A8	GRADER	G-3
					50.6	*16.0*	*33*	*18.6*	*22.9*	*153.5*				
17.5-25	12	TBLS	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1380	467	26	517	619	4093	171	A2	LOADER - DOZER	L-3
					54.3	*18.4*	*33*	*20.4*	*24.4*	*161.1*				
					1380	467	26	517	619	4093	153	B	EARTHMOVER	E-3
					54.3	*18.4*	*33*	*20.4*	*24.4*	*161.1*				
					1380	467	26	517	619	4093	145	A8	GRADER	G-3
					54.3	*18.4*	*33*	*20.4*	*24.4*	*161.1*				
17.5-25	16	TBLS	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1391	460	26	524	628	4172	177	A2	LOADER - DOZER	L-3
					54.8	*18.1*	*33*	*20.6*	*24.7*	*164.3*				
					1391	460	26	524	628	4172	158	B	EARTHMOVER	E-3
					54.8	*18.1*	*33*	*20.6*	*24.7*	*164.3*				
					1391	460	26	524	628	4172	150	A8	GRADER	G-3
					54.8	*18.1*	*33*	*20.6*	*24.7*	*164.3*				
17.5-25	20	TBLS	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1363	477	28	539	619	4086	181	A2	LOADER - DOZER	L-3
					53.7	*18.8*	*35*	*21.2*	*24.4*	*160.9*				
					1363	477	28	539	619	4086	164	B	EARTHMOVER	E-3
					53.7	*18.8*	*35*	*21.2*	*24.4*	*160.9*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																				
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	-	-	-	4250	4475	4675	4875	5100	5350	5600	-	-	-	-	-	-	-	-
-	-	2575	2775	3000	3250	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5700*	*6150*	*6600*	*7150*	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2000	2180	2650	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*4400*	*4800*	*5850*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	4250	4475	4675	4875	5100	5350	5600	5800	6000	6150	6400	6650	6900	-	-
-	-	-	-	-	*9400*	*9900*	*10300*	*10750*	*11250*	*11800*	*12350*	*12800*	*13250*	*13600*	*14150*	*14700*	*15250*	-	-
-	-	2575	2775	3000	3250	3650	4000	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5700*	*6150*	*6600*	*7150*	*8050*	*8850*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2000	2180	2500	2800	3000	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*4400*	*4800*	*5500*	*6200*	*6600*	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	4250	4500	4750	5050	5350	5600	5900	6150	-	-	-	-	-	-	-	-	-	-
-	-	*9400*	*9950*	*10500*	*11150*	*11800*	*12350*	*13000*	*13600*	-	-	-	-	-	-	-	-	-	-
-	-	3100	3375	3650	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6850*	*7450*	*8050*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2625	2900	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5800*	*6400*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	4250	4500	4750	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	-	-	-	-	-
-	-	*9400*	*9950*	*10500*	*11150*	*11800*	*12350*	*13000*	*13600*	*14150*	*14700*	*15250*	*15650*	*16100*	-	-	-	-	-
-	-	3100	3375	3650	3850	4050	4250	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6850*	*7450*	*8050*	*8500*	*8950*	*9400*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2625	2900	2900	3100	3350	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5800*	*6400*	*6400*	*6850*	*7400*	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	4250	4500	4750	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	7500	7750	8000	8250	-
-	-	*9400*	*9950*	*10500*	*11150*	*11800*	*12350*	*13000*	*13600*	*14150*	*14700*	*15250*	*15650*	*16100*	*16550*	*17100*	*17650*	*18200*	-
-	-	3100	3375	3650	3850	4050	4250	4450	4650	4850	5000	-	-	-	-	-	-	-	-
-	-	*6850*	*7450*	*8050*	*8500*	*8950*	*9400*	*9800*	*10250*	*10700*	*11050*	-	-	-	-	-	-	-	-



CAMSO LM L3 (cont.)

MULTI-SURFACE PERFORMANCE

FEATURES

- Heavy-duty carcass
- Non-directional tread pattern with optimized lug-to-void ratio
- Stepped tread design
- Deep and flat tread profile

BENEFITS

- Increases side impact resistance and stability
- Ensures even tread wearing for greater durability
- Enhances tread cleanout for improved traction
- Reduces tread crowning for improved durability

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
20.5-25	16	TBLS	17.00/2.0	17.00/1.7	1503	545	32	646	661	4365	181	A2	LOADER - DOZER	L-3
					59.2	*21.5*	*40*	*25.4*	*26.0*	*171.9*				
					1503	545	32	646	661	4365	167	B	EARTHMOVER	E-3
					59.2	*21.5*	*40*	*25.4*	*26.0*	*171.9*				
					1503	545	32	646	661	4365	156	A8	GRADER	G-3
					59.2	*21.5*	*40*	*25.4*	*26.0*	*171.9*				
20.5-25	20	TBLS	17.00/2.0	17.00/2.0 IF	1512	552	30	629	671	4478	186	A2	LOADER - DOZER	L-3
					59.5	*21.7*	*38*	*24.8*	*26.4*	*176.3*				
					1512	552	30	629	671	4478	170	B	EARTHMOVER	E-3
					59.5	*21.7*	*38*	*24.8*	*26.4*	*176.3*				
23.5-25	20	TBLS	19.50/2.5	19.50/2.5 IF	1620	635	37	692	729	4835	191	A2	LOADER - DOZER	L-3
					63.8	*25.0*	*47*	*27.2*	*28.7*	*190.4*				
					1620	635	37	692	729	4835	177	B	EARTHMOVER	E-3
					63.8	*25.0*	*47*	*27.2*	*28.7*	*190.4*				
23.5-25	24	TBLS	19.50/2.5	19.50/2.5 IF	1630	630	37	687	734	4865	196	A2	LOADER - DOZER	L-3
					64.2	*24.8*	*47*	*27.0*	*28.9*	*191.5*				
					1630	630	37	687	734	4865	180	B	EARTHMOVER	E-3
					64.2	*24.8*	*47*	*27.0*	*28.9*	*191.5*				
26.5-25	20	TBLS	22.00/3.0	22.00/3.0 IF	1752	691	40	-	781	5229	198	A2	LOADER - DOZER	L-3
					69.0	*27.2*	*50*	-	*30.7*	*205.9*				
					1752	691	40	-	781	5229	181	B	EARTHMOVER	E-3
					69.0	*27.2*	*50*	-	*30.7*	*205.9*				
26.5-25	28	TBLS	22.00/3.0	22.00/3.0 IF	1767	690	40	-	786	5274	203	A2	LOADER - DOZER	L-3
					69.6	*27.2*	*50*	-	*30.9*	*207.6*				
					1767	690	40	-	786	5274	188	B	EARTHMOVER	E-3
					69.6	*27.2*	*50*	-	*30.9*	*207.6*				
29.5-25	28	TBLS	25.00/3.5	25.00/3.5 IF	1873	770	36	-	835	5590	207	A2	LOADER - DOZER	L-3
					73.7	*30.3*	*45*	-	*32.9*	*220.1*				
					1873	770	36	-	835	5590	193	B	EARTHMOVER	E-3
					73.7	*30.3*	*45*	-	*32.9*	*220.1*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																				
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	5500	5900	6300	6700	7100	7500	7900	8250	-	-	-	-	-	-	-	-	-	-
-	-	*12150*	*13000*	*13900*	*14800*	*15650*	*16550*	*17450*	*18200*	-	-	-	-	-	-	-	-	-	-
-	-	4150	4500	4825	5150	5450	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*9150*	*9950*	*10650*	*11350*	*12050*	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	3550	3775	4000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*7850*	*8350*	*8850*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	5500	5900	6300	6700	7100	7500	7900	8250	8550	8875	9200	9500	-	-	-	-	-	-
-	-	*12150*	*13000*	*13900*	*14800*	*15650*	*16550*	*17450*	*18200*	*18850*	*19600*	*20300*	*20950*	-	-	-	-	-	-
-	-	4150	4500	4825	5150	5450	5750	6000	-	-	-	-	-	-	-	-	-	-	-
-	-	*9150*	*9950*	*10650*	*11350*	*12050*	*12700*	*13250*	-	-	-	-	-	-	-	-	-	-	-
-	-	7000	7500	8000	8500	9000	9500	10000	10400	10900	-	-	-	-	-	-	-	-	-
-	-	*15450*	*16550*	*17650*	*18750*	*19850*	*20950*	*22100*	*22950*	*24050*	-	-	-	-	-	-	-	-	-
-	-	5300	4750	6150	6550	6950	7300	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*11700*	*10500*	*13600*	*14450*	*15350*	*16100*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	7000	7500	8000	8500	9000	9500	10000	10400	10900	11300	11700	12100	12500	-	-	-	-	-
-	-	*15450*	*16550*	*17650*	*18750*	*19850*	*20950*	*22100*	*22950*	*24050*	*24950*	*25850*	*26700*	*27600*	-	-	-	-	-
-	-	5300	4750	6150	6550	6950	7300	7650	8000	-	-	-	-	-	-	-	-	-	-
-	-	*11700*	*10500*	*13600*	*14450*	*15350*	*16100*	*16900*	*17650*	-	-	-	-	-	-	-	-	-	-
-	-	9500	10000	10500	11000	11500	12050	12650	13200	-	-	-	-	-	-	-	-	-	-
-	-	*20950*	*22100*	*23200*	*24300*	*25400*	*26600*	*27900*	*29150*	-	-	-	-	-	-	-	-	-	-
-	-	6750	7300	7800	8250	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*14900*	*16100*	*17200*	*18200*	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	9500	10000	10500	11000	11500	12050	12650	13200	13600	14000	14500	15000	15500	-	-	-	-	-
-	-	*20950*	*22100*	*23200*	*24300*	*25400*	*26600*	*27900*	*29150*	*30000*	*30900*	*32000*	*33100*	*34200*	-	-	-	-	-
-	-	6750	7300	7800	8250	8750	9250	9650	10000	-	-	-	-	-	-	-	-	-	-
-	-	*14900*	*16100*	*17200*	*18200*	*19300*	*20400*	*21300*	*22100*	-	-	-	-	-	-	-	-	-	-
-	-	10900	11500	12150	12850	13600	14000	15000	15500	16000	17000	17500	-	-	-	-	-	-	-
-	-	*24050*	*25400*	*26800*	*28350*	*30000*	*30900*	*33100*	*34200*	*35300*	*37550*	*38650*	-	-	-	-	-	-	-
-	-	8000	8500	9250	10000	10300	10900	11500	-	-	-	-	-	-	-	-	-	-	-
-	-	*17650*	*18750*	*20400*	*22100*	*22750*	*24050*	*25400*	-	-	-	-	-	-	-	-	-	-	-



CAMSO LM L2

OFF-ROAD TRACTION AND DURABILITY

FEATURES

- Heavy-duty carcass
- Hauler stepped tread design
- Deep and flat tread profile

BENEFITS

- Increases side impact resistance and stability
- Enhances tread cleanout for improved traction
- Reduces tread crowning for improved durability

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
15.5-25	12	TBLS	12.00/1.3	13.00/1.4 (DC)	1272	408	26	471	569	3822	168	A2	LOADER - DOZER	L-2
					50.1	*16.1*	*33*	*18.5*	*22.4*	*150.5*				
					1272	408	26	471	569	3822	149	B	EARTHMOVER	E-2
					50.1	*16.1*	*33*	*18.5*	*22.4*	*150.5*				
					1272	408	26	471	569	3822	142	A8	GRADER	G-2
					50.1	*16.1*	*33*	*18.5*	*22.4*	*150.5*				
15.5-25	16	TBLS	-	12.00/1.3 13.00/1.4 (DC)	1274	414	26	477	564	3834	175	A2	LOADER - DOZER	L-2
					50.2	*16.3*	*33*	*18.8*	*22.2*	*150.9*				
					1274	414	26	477	564	3834	156	B	EARTHMOVER	E-2
					50.2	*16.3*	*33*	*18.8*	*22.2*	*150.9*				
					1274	414	26	477	564	3834	146	A8	GRADER	G-2
					50.2	*16.3*	*33*	*18.8*	*22.2*	*150.9*				
17.5-25	12	TBLS	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1335	385	26	518	593	3972	171	A2	LOADER - DOZER	L-2
					52.6	*15.2*	*33*	*20.4*	*23.3*	*156.4*				
					1335	385	26	518	593	3972	153	B	EARTHMOVER	E-2
					52.6	*15.2*	*33*	*20.4*	*23.3*	*156.4*				
					1335	385	26	518	593	3972	145	A8	GRADER	G-2
					52.6	*15.2*	*33*	*20.4*	*23.3*	*156.4*				
17.5-25	16	TBLS	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1337	460	26	538	599	4013	177	A2	LOADER - DOZER	L-2
					52.6	*18.1*	*33*	*21.2*	*23.6*	*158.0*				
					1337	460	26	538	599	4013	158	B	EARTHMOVER	E-2
					52.6	*18.1*	*33*	*21.2*	*23.6*	*158.0*				
					1337	460	26	538	599	4013	150	A8	GRADER	G-2
					52.6	*18.1*	*33*	*21.2*	*23.6*	*158.0*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	-	-	-	4250	4475	4675	4875	5100	5350	5600	-	-	-	-	-	-	-	-
-	-	-	-	-	*9400*	*9900*	*10300*	*10750*	*11250*	*11800*	*12350*	-	-	-	-	-	-	-	-
-	-	2575	2775	3000	3250	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5700*	*6150*	*6600*	*7150*	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2000	2180	2650	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*4400*	*4800*	*5850*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	4250	4475	4675	4875	5100	5350	5600	5800	6000	6150	6400	6650	6900	-	-
-	-	-	-	-	*9400*	*9900*	*10300*	*10750*	*11250*	*11800*	*12350*	*12800*	*13250*	*13600*	*14150*	*14700*	*15250*	-	-
-	-	2575	2775	3000	3250	3650	4000	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5700*	*6150*	*6600*	*7150*	*8050*	*8850*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2000	2180	2500	2800	3000	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*4400*	*4800*	*5500*	*6200*	*6600*	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	4250	4500	4750	5050	5350	5600	5900	6150	-	-	-	-	-	-	-	-	-	-
-	-	*9400*	*9950*	*10500*	*11150*	*11800*	*12350*	*13000*	*13600*	-	-	-	-	-	-	-	-	-	-
-	-	3100	3375	3650	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6850*	*7450*	*8050*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2625	2900	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5800*	*6400*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	4250	4500	4750	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	-	-	-	-	-
-	-	*9400*	*9950*	*10500*	*11150*	*11800*	*12350*	*13000*	*13600*	*14150*	*14700*	*15250*	*15650*	*16100*	-	-	-	-	-
-	-	3100	3375	3650	3850	4050	4250	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6850*	*7450*	*8050*	*8500*	*8950*	*9400*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2625	2900	2900	3100	3350	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5800*	*6400*	*6400*	*6850*	*7400*	-	-	-	-	-	-	-	-	-	-	-	-	-



CAMSO
LM L2 (cont.)

OFF-ROAD TRACTION AND DURABILITY

FEATURES

- Heavy-duty carcass
- Hauler stepped tread design
- Deep and flat tread profile

BENEFITS

- Increases side impact resistance and stability
- Enhances tread cleanout for improved traction
- Reduces tread crowning for improved durability

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
20.5-25	16	TBLS	17.00/2.0	17.00/1.7	1506	535	30	637	650	4453	181	A2	LOADER - DOZER	L-2
					59.3	*21.1*	*38*	*25.1*	*25.6*	*175.3*				
					1506	535	30	637	650	4453	167	B	EARTHMOVER	E-2
					59.3	*21.1*	*38*	*25.1*	*25.6*	*175.3*				
					1506	535	30	637	650	4453	156	A8	GRADER	G-2
					59.3	*21.1*	*38*	*25.1*	*25.6*	*175.3*				
20.5-25	20	TBLS	17.00/2.0	17.00/2.0 IF	1487	550	30	-	663	4438	186	A2	LOADER - DOZER	L-2
					58.5	*21.7*	*38*	-	*26.1*	*174.7*				
					1487	550	30	-	663	4438	170	B	EARTHMOVER	E-2
					58.5	*21.7*	*38*	-	*26.1*	*174.7*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*

1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	5500	5900	6300	6700	7100	7500	7900	8250	-	-	-	-	-	-	-	-	-	-
-	-	*12150*	*13000*	*13900*	*14800*	*15650*	*16550*	*17450*	*18200*	-	-	-	-	-	-	-	-	-	-
-	-	4150	4500	4825	5150	5450	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*9150*	*9950*	*10650*	*11350*	*12050*	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	3550	3775	4000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*7850*	*8350*	*8850*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	5500	5900	6300	6700	7100	7500	7900	8250	8550	8875	9200	9500	-	-	-	-	-	-
-	-	*12150*	*13000*	*13900*	*14800*	*15650*	*16550*	*17450*	*18200*	*18850*	*19600*	*20300*	*20950*	-	-	-	-	-	-
-	-	4150	4500	4825	5150	5450	5750	6000	-	-	-	-	-	-	-	-	-	-	-
-	-	*9150*	*9950*	*10650*	*11350*	*12050*	*12700*	*13250*	-	-	-	-	-	-	-	-	-	-	-



CAMSO WHL 773

Formerly Solideal RM L3

RELIABLE PERFORMANCE IN HARSH APPLICATIONS

FEATURES

- Wide footprint
- High lug-to-void ratio
- Mono-block tread pattern

BENEFITS

- Excellent stability in abrasive and rocky conditions
- Provides excellent durability and tread impact resistance
- Resists rubber chipping and chunking

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
17.5-25	16	TBLS	14.00/1.5	14.00/1.3 13.00/1.4 (DC)	1350	445	30	-	602	4029	177	A2	LOADER - DOZER	L-3
					53.1	*17.5*	*38*	-	*23.7*	*158.6*				
					1350	445	30	-	602	4029	158	B	EARTHMOVER	E-3
					53.1	*17.5*	*38*	-	*23.7*	*158.6*				
					1350	445	30	-	602	4029	150	A8	GRADER	G-3
					53.1	*17.5*	*38*	-	*23.7*	*158.6*				
20.5-25	20	TBLS	17.00/2.0	17.00/2.0 IF	1490	520	32	-	665	4447	186	A2	LOADER - DOZER	L-3
					58.7	*20.5*	*40*	-	*26.2*	*175.1*				
					1490	520	32	-	665	4447	170	B	EARTHMOVER	E-3
					58.7	*20.5*	*40*	-	*26.2*	*175.1*				
23.5-25	20	TBLS	19.50/2.5	19.50/2.5 IF	1615	595	36	-	720	4820	191	A2	LOADER - DOZER	L-3
					63.6	*23.4*	*45*	-	*28.3*	*189.8*				
					1615	595	36	-	720	4820	177	B	EARTHMOVER	E-3
					63.6	*23.4*	*45*	-	*28.3*	*189.8*				
26.5-25	28	TBLS	22.00/3.0	22.00/3.0 IF	1750	675	37	-	-	5278	203	A2	LOADER - DOZER	L-3
					68.9	*26.6*	*47*	-	-	*207.8*				
					1750	675	37	-	-	5278	188	B	EARTHMOVER	E-3
					68.9	*26.6*	*47*	-	-	*207.8*				
29.5-25	28	TBLS	25.00/3.5	25.00/3.5 IF	1875	750	42	-	-	5655	207	A2	LOADER - DOZER	L-3
					73.8	*29.5*	*53*	-	-	*222.6*				
					1875	750	42	-	-	5655	203	B	EARTHMOVER	E-3
					73.8	*29.5*	*53*	-	-	*222.6*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*

1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	4250	4500	4750	5050	5350	5600	5900	6150	6400	6650	6900	7100	7300	-	-	-	-	-
-	-	*9400*	*9950*	*10500*	*11150*	*11800*	*12350*	*13000*	*13600*	*14150*	*14700*	*15250*	*15650*	*16100*	-	-	-	-	-
-	-	3100	3375	3650	3850	4050	4250	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*6850*	*7450*	*8050*	*8500*	*8950*	*9400*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	2625	2900	2900	3100	3350	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*5800*	*6400*	*6400*	*6850*	*7400*	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	5500	5900	6300	6700	7100	7500	7900	8250	8550	8875	9200	9500	-	-	-	-	-	-
-	-	*12150*	*13000*	*13900*	*14800*	*15650*	*16550*	*17450*	*18200*	*18850*	*19600*	*20300*	*20950*	-	-	-	-	-	-
-	-	4150	4500	4825	5150	5450	5750	6000	-	-	-	-	-	-	-	-	-	-	-
-	-	*9150*	*9950*	*10650*	*11350*	*12050*	*12700*	*13250*	-	-	-	-	-	-	-	-	-	-	-
-	-	7000	7500	8000	8500	9000	9500	10000	10400	10900	-	-	-	-	-	-	-	-	-
-	-	*15450*	*16550*	*17650*	*18750*	*19850*	*20950*	*22100*	*22950*	*24050*	-	-	-	-	-	-	-	-	-
-	-	5300	4750	6150	6550	6950	7300	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*11700*	*10500*	*13600*	*14450*	*15350*	*16100*	-	-	-	-	-	-	-	-	-	-	-	-
-	-	9500	10000	10500	11000	11500	12050	12650	13200	13600	14000	14500	15000	15500	-	-	-	-	-
-	-	*20950*	*22100*	*23200*	*24300*	*25400*	*26600*	*27900*	*29150*	*30000*	*30900*	*32000*	*33100*	*34200*	-	-	-	-	-
-	-	6750	7300	7800	8250	8750	9250	9650	10000	-	-	-	-	-	-	-	-	-	-
-	-	*14900*	*16100*	*17200*	*18200*	*19300*	*20400*	*21300*	*22100*	-	-	-	-	-	-	-	-	-	-
-	-	10900	11500	12150	12850	13600	14000	15000	15500	16000	17000	17500	-	-	-	-	-	-	-
-	-	*24050*	*25400*	*26800*	*28350*	*30000*	*30900*	*33100*	*34200*	*35300*	*37550*	*38650*	-	-	-	-	-	-	-
-	-	8000	8500	9250	10000	10300	10900	11500	-	-	-	-	-	-	-	-	-	-	-
-	-	*17650*	*18750*	*20400*	*22100*	*22750*	*24050*	*25400*	-	-	-	-	-	-	-	-	-	-	-



CAMSO SKZ

THE DURABLE CHOICE FOR MIXED SURFACES

FEATURES

- Non-directional extra deep tread
- Massive lug-to-void ratio
- Heavy-duty carcass

BENEFITS

- Improves tread life and resistance to punctures
- Provides excellent durability and even tread wearing
- Increases side impact resistance and stability

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.				
20.5-25	16	TBLS	17.00/2.0	17.00/1.7	1505	561	33	658	663	4353	181	A2	LOADER - DOZER	L-3
					59.3	*22.1*	*42*	*25.9*	*26.1*	*171.4*				
					1505	561	33	658	663	4353	167	B	EARTHMOVER	E-3
					59.3	*22.1*	*42*	*25.9*	*26.1*	*171.4*				
					1505	561	33	658	663	4353	156	A8	GRADER	G-3
					59.3	*22.1*	*42*	*25.9*	*26.1*	*171.4*				

MAXIMUM TIRE LOAD [kg] *[lb]* versus INFLATION PRESSURE [bar] *[PSI]*																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	*21*	*25*	*29*	*32*	*36*	*39*	*43*	*46*	*50*	*54*	*57*	*61*	*64*	*68*	*71*	*75*	*79*	*82*	*86*
-	-	5500	5900	6300	6700	7100	7500	7900	8250	-	-	-	-	-	-	-	-	-	-
-	-	*12150*	*13000*	*13900*	*14800*	*15650*	*16550*	*17450*	*18200*	-	-	-	-	-	-	-	-	-	-
-	-	4150	4500	4825	5150	5450	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*9150*	*9950*	*10650*	*11350*	*12050*	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	3550	3775	4000	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
-	-	*7850*	*8350*	*8850*	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-



CAMSO WL

HIGH PERFORMANCE. MAXIMUM PROTECTION

FEATURES

- Heavy-duty carcass
- Large casing design
- Extra-deep lug depth
- Premium rubber compounds

BENEFITS

- Provides best stability and side impact resistance
- Improves ride quality and stability
- Provides best durability and traction
- Provides best durability and cut resistance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL
						Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.		
8.25-20	14	TT	8.25/ 9.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	6.50	7.00	1000	252	26	272	486	2985	148	A2
								39.4	*9.9*	*33*	*10.7*	*19.1*	*117.5*		
9.00-20	14	TT	8.25/ 9.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.00	6.50/7.50	1039	267	27	301	485	3101	153	A2
								40.9	*10.5*	*34*	*11.9*	*19.1*	*122.1*		
10.00-20	16	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.50	7.00/8.00	1070	284	26	316	496	3226	158	A2
								42.1	*11.2*	*33*	*12.4*	*19.5*	*127.0*		
11.00-20	16	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	8.00	8.50	1064	280	22	334	512	3376	160	A2
								41.9	*11.0*	*28*	*13.1*	*20.2*	*132.9*		

MAXIMUM TIRE LOAD [kg] *[lb]*					
All surfaces			Improved surfaces		
Static	Creep	0-8 km/h *0-5 mph*	16 km/h *6 mph*	25 km/h *16 mph*	45 km/h *28 mph*
6105	5120	3645	3150	2600	2325
13500	*11300*	*8050*	*6950*	*5750*	*5150*
9.00 bar	9.00 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
129 PSI	*129 PSI*	*114 PSI*	*114 PSI*	*107 PSI*	*107 PSI*
6990	5860	4170	3605	2975	2660
15450	*12950*	*9200*	*7950*	*6550*	*5850*
8.50 bar	8.50 bar	7.50 bar	7.50 bar	7.00 bar	7.00 bar
121 PSI	*121 PSI*	*107 PSI*	*107 PSI*	*100 PSI*	*100 PSI*
8215	6890	4900	4240	3500	3125
18150	*15200*	*10800*	*9350*	*7750*	*6900*
8.50 bar	8.50 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
121 PSI	*121 PSI*	*114 PSI*	*114 PSI*	*107 PSI*	*107 PSI*
8700	7300	5200	4500	3700	3300
19200	*16100*	*11500*	*9950*	*8150*	*7300*
8.50 bar	8.50 bar	7.75 bar	7.75 bar	7.00 bar	7.00 bar
121 PSI	*121 PSI*	*111 PSI*	*111 PSI*	*100 PSI*	*100 PSI*



CAMSO WEX 552

Formerly known as Solideal WEX

PERFORMANCE AND QUALITY YOU CAN COUNT ON

FEATURES

- Robust carcass
- Advanced rubber compounds
- Deep lug depth

BENEFITS

- Enhances stability and side impact resistance
- Improves durability and cut resistance
- Enhances durability and traction

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*						LOAD INDEX	SPEED SYMBOL
						Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.		
9.00-20	14	TT	8.25/ 9.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.00	6.50/7.50	1022	267	19.5	302	448	3090	153	A2
								40.2	*10.5*	*25*	*11.9*	*17.6*	*121.7*		
10.00-20	14	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.50	7.00/8.00	1064	281	21	325	461	3208	155	A2
								41.9	*11.1*	*26*	*12.8*	*18.1*	*126.3*		
10.00-20	16	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.50	7.00/8.00	1064	281	21	325	461	3208	158	A2
								41.9	*11.1*	*26*	*12.8*	*18.1*	*126.3*		

MAXIMUM TIRE LOAD [kg] *[lb]*					
All surfaces			Improved surfaces		
Static	Creep	0-8 km/h *0-5 mph*	16 km/h *6 mph*	25 km/h *16 mph*	45 km/h *28 mph*
6990	5860	4170	3605	2975	2660
15450	*12950*	*9200*	*7950*	*6550*	*5850*
8.50 bar	8.50 bar	7.50 bar	7.50 bar	7.00 bar	7.00 bar
121 PSI	*121 PSI*	*107 PSI*	*107 PSI*	*100 PSI*	*100 PSI*
7455	6255	4450	3850	3175	2840
16450	*13800*	*9800*	*8500*	*7000*	*6250*
7.5 bar	7.5 bar	7.0 bar	7.0 bar	6.0bar	6.0bar
107 PSI	*107 PSI*	*100 PSI*	*100 PSI*	*87 PSI*	*87 PSI*
8215	6890	4900	4240	3500	3125
18150	*15200*	*10800*	*9350*	*7750*	*6900*
8.50 bar	8.50 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
121 PSI	*121 PSI*	*114 PSI*	*114 PSI*	*107 PSI*	*107 PSI*



CAMSO CMP 533

COMPACTION PERFORMANCE AND DURABILITY SOLUTION

FEATURES

- Optimized ttread pattern
- Robust carcass design
- Flatter tread profile
- Engineered tread profile with hauler steps and shoulder lugs

BENEFITS

- Minimizes ground pressure and damage for better compaction performance
- Enhances side impact resistance for fewer flats
- Ensures even tread wearing for greater durability
- Enhances traction for improved performance

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*				LOAD INDEX	SPEED SYMBOL	TRA CODE	IP [bar] *[PSI]*	LOAD CAPACITY [kg] *[lb]*	
						Recommended	Alternative	O.D.	O.W.	M.D.S.	S.L.R.					10 km/h *6 mph*	15 km/h *9 mph*
23.1-26 IND	12	TBLS	10.00/ 11.00-20	V5-15-1	8.25/ 9.00/ 10.00/ 11.00/ 12.00-20	DW20B	DW20A; TW20B	1555	611,0	-	688.0	162	A8	R-3	1.9	5940	5370
								388,8	*24,1*	-	*27.1*				*27*	*13100*	*11850*



CAMSO CMP 576

Formerly Solideal SM C1

EXCELLENT COMPACTION PERFORMANCE

FEATURES

- Aggressive curved R1 tread pattern
- Heavy-duty reinforced sidewall
- Hauler stepped tread design

BENEFITS

- Maximizes traction and improves ride quality
- Provides side impact protection for fewer flat tires
- Maximizes tread cleanout in off-road conditions for improved traction

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	TT / TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[in]*				LOAD INDEX	SPEED SYMBOL	TRA CODE	IP [bar] *[PSI]*	LOAD CAPACITY [kg] *[lb]*	
						Recommended	Alternative	O.D.	O.W.	M.D.S.	S.L.R.					10 km/h *6 mph*	15 km/h *9 mph*
7.50-15 NHS	14	TT	700/ 750/ 815-17	TR 440	7.00/ 7.50/ 8.25-15	6.00	6.50	788	214	226	362	136	A3	C-1	8.50	2835	2270
								31.0	*8.4*	*8.9*	*14.3*				*121*	*6250*	*5000*
8.50/90-15K	6	TBLS	-	-	-	6.00	5.5F	761	217	-	688.0	120	A3	C-1	3.50	1770	1400
								30.0	*8.5*	-	*27.1*				*50*	*3900*	*3100*
11.00-20 NHS	16	TT	10.00/ 11.00-20	V3-02-15 TR 444	8.25/ 9.00/ 10.00/ 11.00/ 12.00-20	8.00	8.50	1056	287	313	493	158	A3	C-1	7.40	5445	4355
								41.6	*11.3*	*12.3*	*19.4*				*106*	*12000*	*9600*



CAMSO SKS 511

Formerly Solideal SKS R1

OFF-ROAD TRACTION AT ITS BEST

FEATURES

- Aggressive curved R1 tread pattern
- Heavy-duty reinforced sidewall
- Hauler stepped tread design

BENEFITS

- Maximizes traction and improves ride quality
- Provides side impact protection for fewer flat tires
- Maximizes tread cleanout in off-road conditions for improved traction

PERFORMANCE

TIRE LIFE

PUNCTURE RESISTANCE

TRACTION

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] *[inches]*						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] *[PSI]*	MAXIMUM TIRE LOAD [kg] *[lb]*			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] *[32nd]*	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
26x12-12	8	10.50	8.50/8.50JA	667	300	21.0	325	302	2024	TBLS	119	A2	R-1	3.50	2160	1580	1370	1080
				26.3	*11.8*	*26*	*12.8*	*11.9*	*79.7*					*50*	*4750*	*3500*	*3000*	*2400*
29x12.5-15	8	10LB	-	748	309	18.0	389	339	2255	TBLS	123	A2	R-1	3.10	2440	1780	1545	1220
				29.4	*12.2*	*23*	*15.3*	*13.3*	*88.8*					*44*	*5400*	*3950*	*3400*	*2700*
31x15.5-15	8	13.00	13LB	804	380	21.0	409	370	2424	TBLS	126	A2	R-1	3.10	2670	1940	1690	1340
				31.7	*15.0*	*26*	*16.1*	*14.6*	*95.4*					*44*	*5900*	*4300*	*3750*	*2950*
26x12-16.5 (300/40-16.5)	10	9.75	-	659	285	21.0	299	297	2014	TBLS	124	A2	R-1	4.00	2580	1870	1630	1290
				25.9	*11.2*	*26*	*11.8*	*11.7*	*79.3*					*57*	*5700*	*4150*	*3600*	*2850*
33x15.5-16.5	10	12.00	-	830	371	23.0	396	373	2488	TBLS	143	A2	R-1	3.40	4310	3130	2725	2150
				32.7	*14.6*	*29*	*15.6*	*14.7*	*98.0*					*49*	*9500*	*6900*	*6000*	*4750*

CONSTRUCTION TRACKS



CAMSO MEX HXD

EXTREME RESISTANCE TO SEVERE CONDITIONS

FEATURES	BENEFITS
▪ Patented 3S internal iron core	▪ Avoids unexpected downtime on job site and the beginning of the degradation process
▪ High-tensile, rubber sealed steel cables protected by heavy-duty carcass and tread	▪ Resists carcass punctures and cable corrosion to extend service life
▪ Curbshield technology with heavy-duty carcass	▪ Maximizes service life prior to track degradation process triggered by edge cutting leading to iron core corrosion
▪ Patented 3S internal iron core	▪ Minimizes vibrations for better ride quality and lower maintenance cost

PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

TREAD PATTERNS







CAMSO MEX HXD (cont.)

WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
230	48	AH	I	KA	26.5	24.5	3S	STANDARD
300	55	AH	I	SA	35	27.5	3S	NARROW
300	55	AH	I	WA	35	27.5	3S	WIDE
400	72.5	AH	I	WA	43	27.5	3S	NARROW
400	72.5	AH	I	EA	43	27.5	3S	WIDE
400	72.5	AH	J	EA	45.5	27.5	3S RAIL TYPE	STANDARD
400	75.5	AH	J	WA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
450	71	AH	I	JA	48	30	3S	STANDARD
450	76	AH	I	JA	48	30	3S	STANDARD
450	81	AH	I	OA	46.5	30.5	3S	NARROW
450	81	AH	I	AA	46.5	30.5	3S	WIDE
450	83.5	AH	J	UA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
485	92	AH	I	D	62.5	27	OFFSET	STANDARD
500	92	AB	I	D	58	30	STANDARD	STANDARD



CAMSO MEX SD

PREDICTABLE SERVICE LIFE AND PERFORMANCE

FEATURES

- Patented 3S internal iron core
- High-tensile, rubber sealed steel cables
- Curbshield technology
- Patented 3S internal iron core

BENEFITS

- Avoids unexpected downtime on job site and the beginning of the degradation process
- Resists carcass punctures and cable corrosion to extend service life
- Extends service life prior to track degradation process triggered by edge cutting leading to iron core corrosion
- Minizes vibrations for better ride quality and lower maintenance cost


PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

TREAD PATTERNS

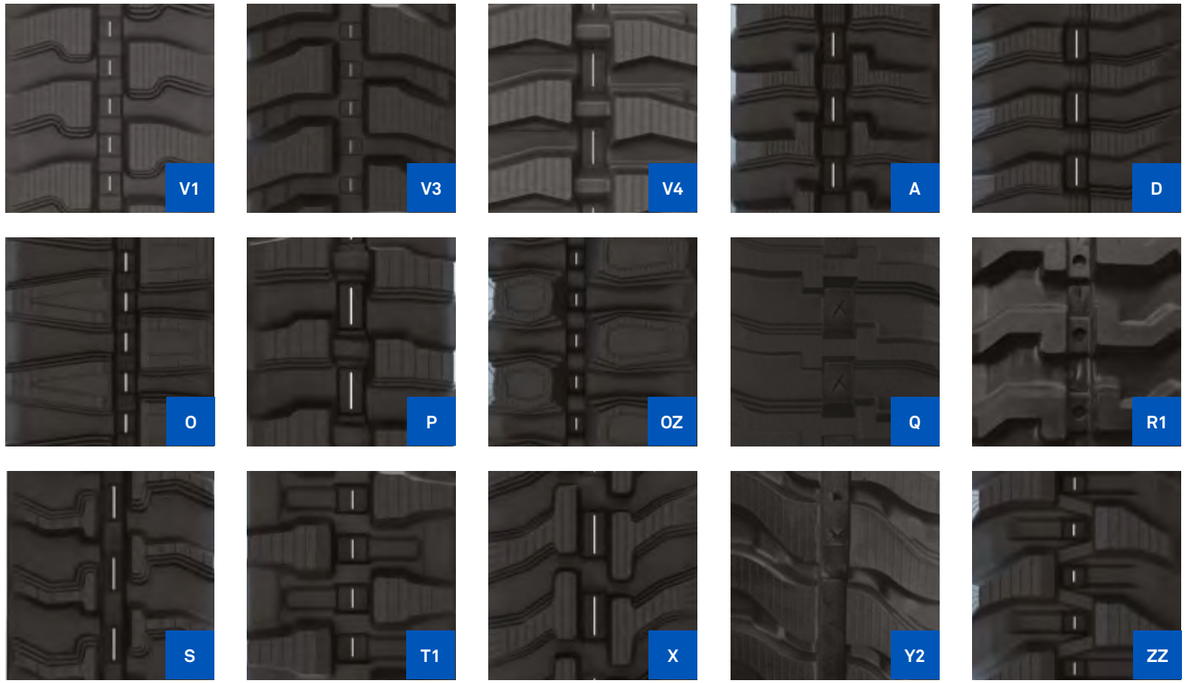



CAMSO MEX SD (cont.)

WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
130	72	A	A	RB	18	15	STANDARD	STANDARD
180	60	S	A	F	16	13	STANDARD	STANDARD
	72	X	A	R	20	15	STANDARD	NARROW
		X	A	P	21	17	STANDARD	WIDE
		P	B	R	21	17	RAIL TYPE	STANDARD
200	72	A	A	P	22	15	STANDARD	WIDE
		X	A	R	20	15	STANDARD	NARROW
		X	A	P	24	18	STANDARD	WIDE
		V4	J	P	24.5	17	RAIL TYPE	WIDE
230	72	A	A	P	22	18	STANDARD	WIDE
		B	A	P	22	18	STANDARD	WIDE
		V4	J	P2	21.5	17	RAIL TYPE	WIDE
	48	V1	I	KA	22	18	3S	STANDARD
		T1	J	K	26	22	RAIL TYPE	STANDARD
	96	ZZ	J	K	22.5	23	RAIL TYPE	STANDARD
250	72	B	A	P	24	17	STANDARD	WIDE
		D	A	P	24	17	STANDARD	WIDE
		R1	A	PR	30	18	STANDARD	WIDE
	48	V1	I	KA	27	20	3S	STANDARD
	52.5	V1	I	SA	30	24	3S	NARROW
		V1	I	WA	30	24	3S	WIDE
300	52.5	V1	I	SA	31	23	3S	NARROW
		V1	I	WA	31	23	3S	WIDE
	53	V1	J	SA	33	25	3S RAIL TYPE	NARROW
	55	Y2	J	SF	36	25	RAIL TYPE	STANDARD
	55.5	O	J	SA	34	25	3S OFFSET - RAIL TYPE	NARROW
320	100	Q	A	W	39	25	STANDARD	STANDARD
350	54.5	V1	J	WA	39	25	3S RAIL TYPE	WIDE
	52.5	V1	I	WF	36	22	STANDARD	WIDE
400	72.5	V1	I	EA	40	25	3S	WIDE
		V1	I	WA	40	25	3S	NARROW
		V1	J	EA	42	25	3S RAIL TYPE	WIDE
450	71	V1	I	JA	46	27	3S	STANDARD
	75.5	V3	I	JS	52	30	STANDARD	STANDARD
	81	V1	I	AA	42	28	3S	WIDE
		V1	I	OA	42	28	3S	NARROW
	83.5	Z2	I	EA-V	57	30	3S	STANDARD
500	92	V1	I	DA	58	33	3S	STANDARD



CAMSO CTL HXD

THE BEST TRACK FOR DURABILITY AND PERFORMANCE

FEATURES

- Single-cure technology with next generation rubber compound
- Trackguard iron core with heavy-duty carcass
- Endless high-tensile steel cables
- Optimized tread pattern with next generation rubber compound

BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves rolling path life for reduced failures and enhanced durability
- Eliminates unexpected downtime due to cable/track breakage
- Maintains excellent traction throughout tread life


PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

TREAD PATTERNS







WIDTH	LINKS	PITCH	TREAD	GUIDING	METAL PIECE	METAL PIECE TYPE
180	39	72	HH	B	R	CONVENTIONAL
180	39, 41, 44, 45	72	ST	J	R	RAIL TYPE
230	39, 41, 44, 45	72	ST	J	R	RAIL TYPE
250	39	72	HH	B	R	CONVENTIONAL
320	45,48,49,50,52,53,54,56	86	HH	B	E	CONVENTIONAL
320	46,48,52	86	HH	J	W	RAIL TYPE
400	49,50,52,53,54,55,56,60	86	HH	B	E	CONVENTIONAL
450	42,52,55,56,59,60	86	HH	B	E	CONVENTIONAL
450	48,50	100	HH	J	E	RAIL TYPE
450	58	86	HA	B	E	CONVENTIONAL



CAMSO CTL SD

ALL-SEASON TRACTION AND DURABILITY

FEATURES

- Single-cure technnology with advanced rubber compound
- Trackguard iron core
- Endless high-tensile steel cables
- Versatile self-cleaning stepped tread design

BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves rolling path life for reduced failures and enhanced durability
- Eliminates unexpected downtime due to cable/track breakage
- Maintains good traction throughout tread life


PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

TREAD PATTERNS



WIDTH	LINKS	PITCH	TREAD	GUIDING	METAL PIECE	METAL PIECE TYPE
320	45,46,48,49,50,52,53,54,56	86	B	B	E	CONVENTIONAL
320	46,48,52	86	B	J	W	RAIL TYPE
400	49,50,52,53,54,55,56	86	B	B	E	CONVENTIONAL
450	48,5	100	B	J	E	RAIL TYPE
450	52,55,56,58,59,60,63,65	86	B	B	E	CONVENTIONAL



CAMSO MTL HXD

ENHANCED DURABILITY AND PROTECTION

FEATURES

- Single cure technology combined with duradrive internal fabric reinforced design
- Heavy duty carcass construction
- Versatile tread pattern matched with advanced rubber compound

BENEFITS

- Protects against drive lug failures to add an extra season and complete tread life utilization
- Increases lateral stability to eliminate detracking for less downtime
- Maintains good traction throughout tread life

PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

TREAD PATTERNS





TRACK WIDTH [in] *[mm]*		TRACK LENGTH [in] *[mm]*		PITCH [in] *[mm]*		NUMBER OF DRIVE LUG	TREAD
15	*381*	166	*4216*	4	*100*	42	MTL1
18	*457*	200	*5080*	4	*100*	51	MTL2
18	*457*	220	*5588*	4	*100*	56	MTL2
18	*457*	201	*5105*	4	*100*	51	MTL2



CAMSO OTT HXD

QUICK MOUNT ATTACHMENT FOR TRACKED PERFORMANCE

FEATURES

- Full rubber track
- Embedded iron core with engineered wing design
- Full width, continuous rubber track footprint
- Internal traction rib

BENEFITS

- Allows operation on asphalt, concrete and turf surfaces without damage or marking
- Avoids detracking like a non-reinforced all rubber OTT
- Increases flotation by 5 times higher than tires and by, at least, twice as much over standard steel track
- Provides high traction between tire and track and prevents tire wear

PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

TREAD PATTERNS



TIRE WIDTH	RIM DIAMETER	LINKS
10	16.5	25, 26,27,28,29,31
12	16.5	29,30,31,32,33



CAMSO HXD SMOOTH

DURABILITY AT ITS BEST

FEATURES

- Single-cure technology with next generation rubber compound
- Optimized multi layer internal construction
- Smooth tread pattern with heavy duty carcass

BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves weight distribution with better lateral stiffness
- Increases track life


PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

SIDE VIEW



WIDTH		LENGHT		TREAD	CARCASS THICKNESS		TREAD THICKNESS		TOTAL THICKNESS	
in	mm	in	mm		in	mm	in	mm	in	mm
16	406	272.5	6921	Smooth	1.2	30	0.8	21	2	51
15.75	400	317	8049	Smooth	1.1	27.5	1.2	30.5	2.3	58
18	457	317	8049	Smooth	1.1	27.5	1.2	30.5	2.3	58



CAMSO HXD CHEVRON

DURABILITY MEETS TRACTION

FEATURES

- Single-cure technology with next generation rubber compound
- Optimized multi layer internal construction
- Chevron type tread pattern

BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves weight distribution with better lateral stiffness
- Provides high traction in softer surfaces

PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

SIDE VIEW



WIDTH		LENGHT		TREAD	CARCASS THICKNESS		TREAD THICKNESS		TOTAL THICKNESS	
in	mm	in	mm		in	mm	in	mm	in	mm
16	406	272.5	6921	Chevron	0.9	23.5	1.5	38	2.4	61.5
15.75	400	317	8049	Chevron	0.9	23.5	1.5	38	2.4	61.5
18	457	317	8049	Chevron	0.9	23.5	1.5	38	2.4	61.5



CAMSO CARRIER HXD

TOP PERFORMANCE AND UPTIME

FEATURES

- First and only endless steel cable in the market
- Trackguard iron core
- Straight bar tread pattern
- Next generation rubber compound

BENEFITS

- Protects from joint failures to avoid unexpected downtime
- Improves rolling path life for reduced failures and enhanced durability
- Provides optimal traction
- Promotes even tread wearing for long, predictable tread life


PERFORMANCE

TREAD LIFE

FAILURE RESISTANCE

TRACTION

TREAD PATTERNS





WIDTH	PITCH	LINKS	TREAD	GUIDING	METAL PIECE	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE
350	100	53, 56, 58, 80	A1	B	E	42	27	STANDARD
700	100	96, 98	A2	B	T	66	32	STANDARD
750	150	66	A2	B	T	80	36	STANDARD

COMPLETE LINE OVERVIEW

SKID STEER LOADERS


CAMSO SKS 775


CAMSO SKS 753


CAMSO SKS 732


CAMSO SKS 532


CAMSO SKS 793S


CAMSO HAULER SKZ


CAMSO SKS 792S

SKID STEER LOADERS (cont.)


CAMSO SKS 796S


CAMSO HAULER SKS


CAMSO XTRA WALL


CAMSO SKS 774


CAMSO SKS 332


CAMSO SKS 782S


CAMSO SKS 786S

BACKHOE LOADERS


CAMSO BHL 753


CAMSO SL R4


CAMSO BHL 532


CAMSO 4L R1


CAMSO BHL 530

TELEHANDLERS


CAMSO TLH 792S


CAMSO SL G3


CAMSO SL G2


CAMSO TLH 532


CAMSO TM R4


CAMSO 4L I3

WHEEL LOADERS | ARTICULATED DUMP TRUCKS | MOTOR GRADERS

RADIAL


CAMSO WHL 753R


CAMSO WHL 775R


CAMSO WHL 776R


CAMSO ADT 753R

WHEEL LOADERS | ARTICULATED DUMP TRUCKS | MOTOR GRADERS (cont.)


CAMSO WHL 775


CAMSO SKZ


CAMSO LM L3


CAMSO LM L2


CAMSO WHL 773

WHEEL EXCAVATORS


CAMSO WL


CAMSO WEX 552

COMPACTION EQUIPMENT


CAMSO CMP 533


CAMSO CMP 576

TRUCK MOUNTED FORKLIFTS


CAMSO SKS 511

MINI-EXCAVATORS


CAMSO MX HXD

CAMSO MX SD

COMPACT TRACK LOADERS

CAMSO CTL HXD

CAMSO CTL SD

MULTI-TERRAIN LOADERS

CAMSO MTL HXD

OTT FOR SKID STEER LOADERS

CAMSO OTT HXD


CARRIERS


CAMSO CARRIER HXD

PAVERS

CAMSO HXD SMOOTH

CAMSO HXD CHEVRON

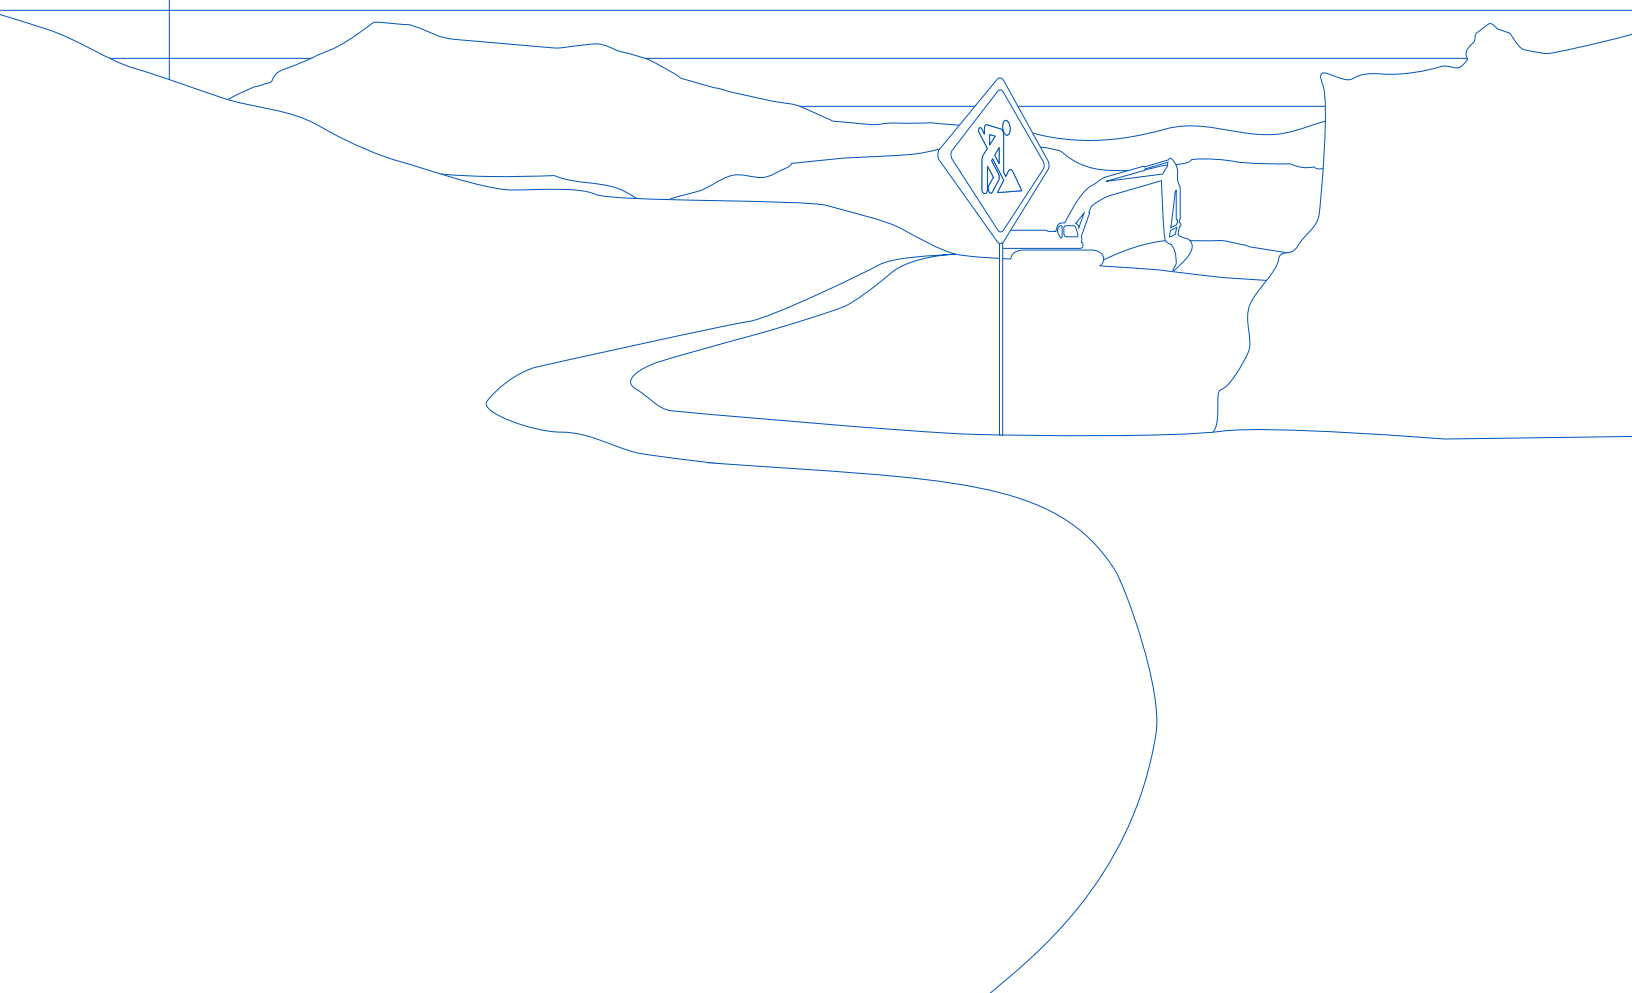

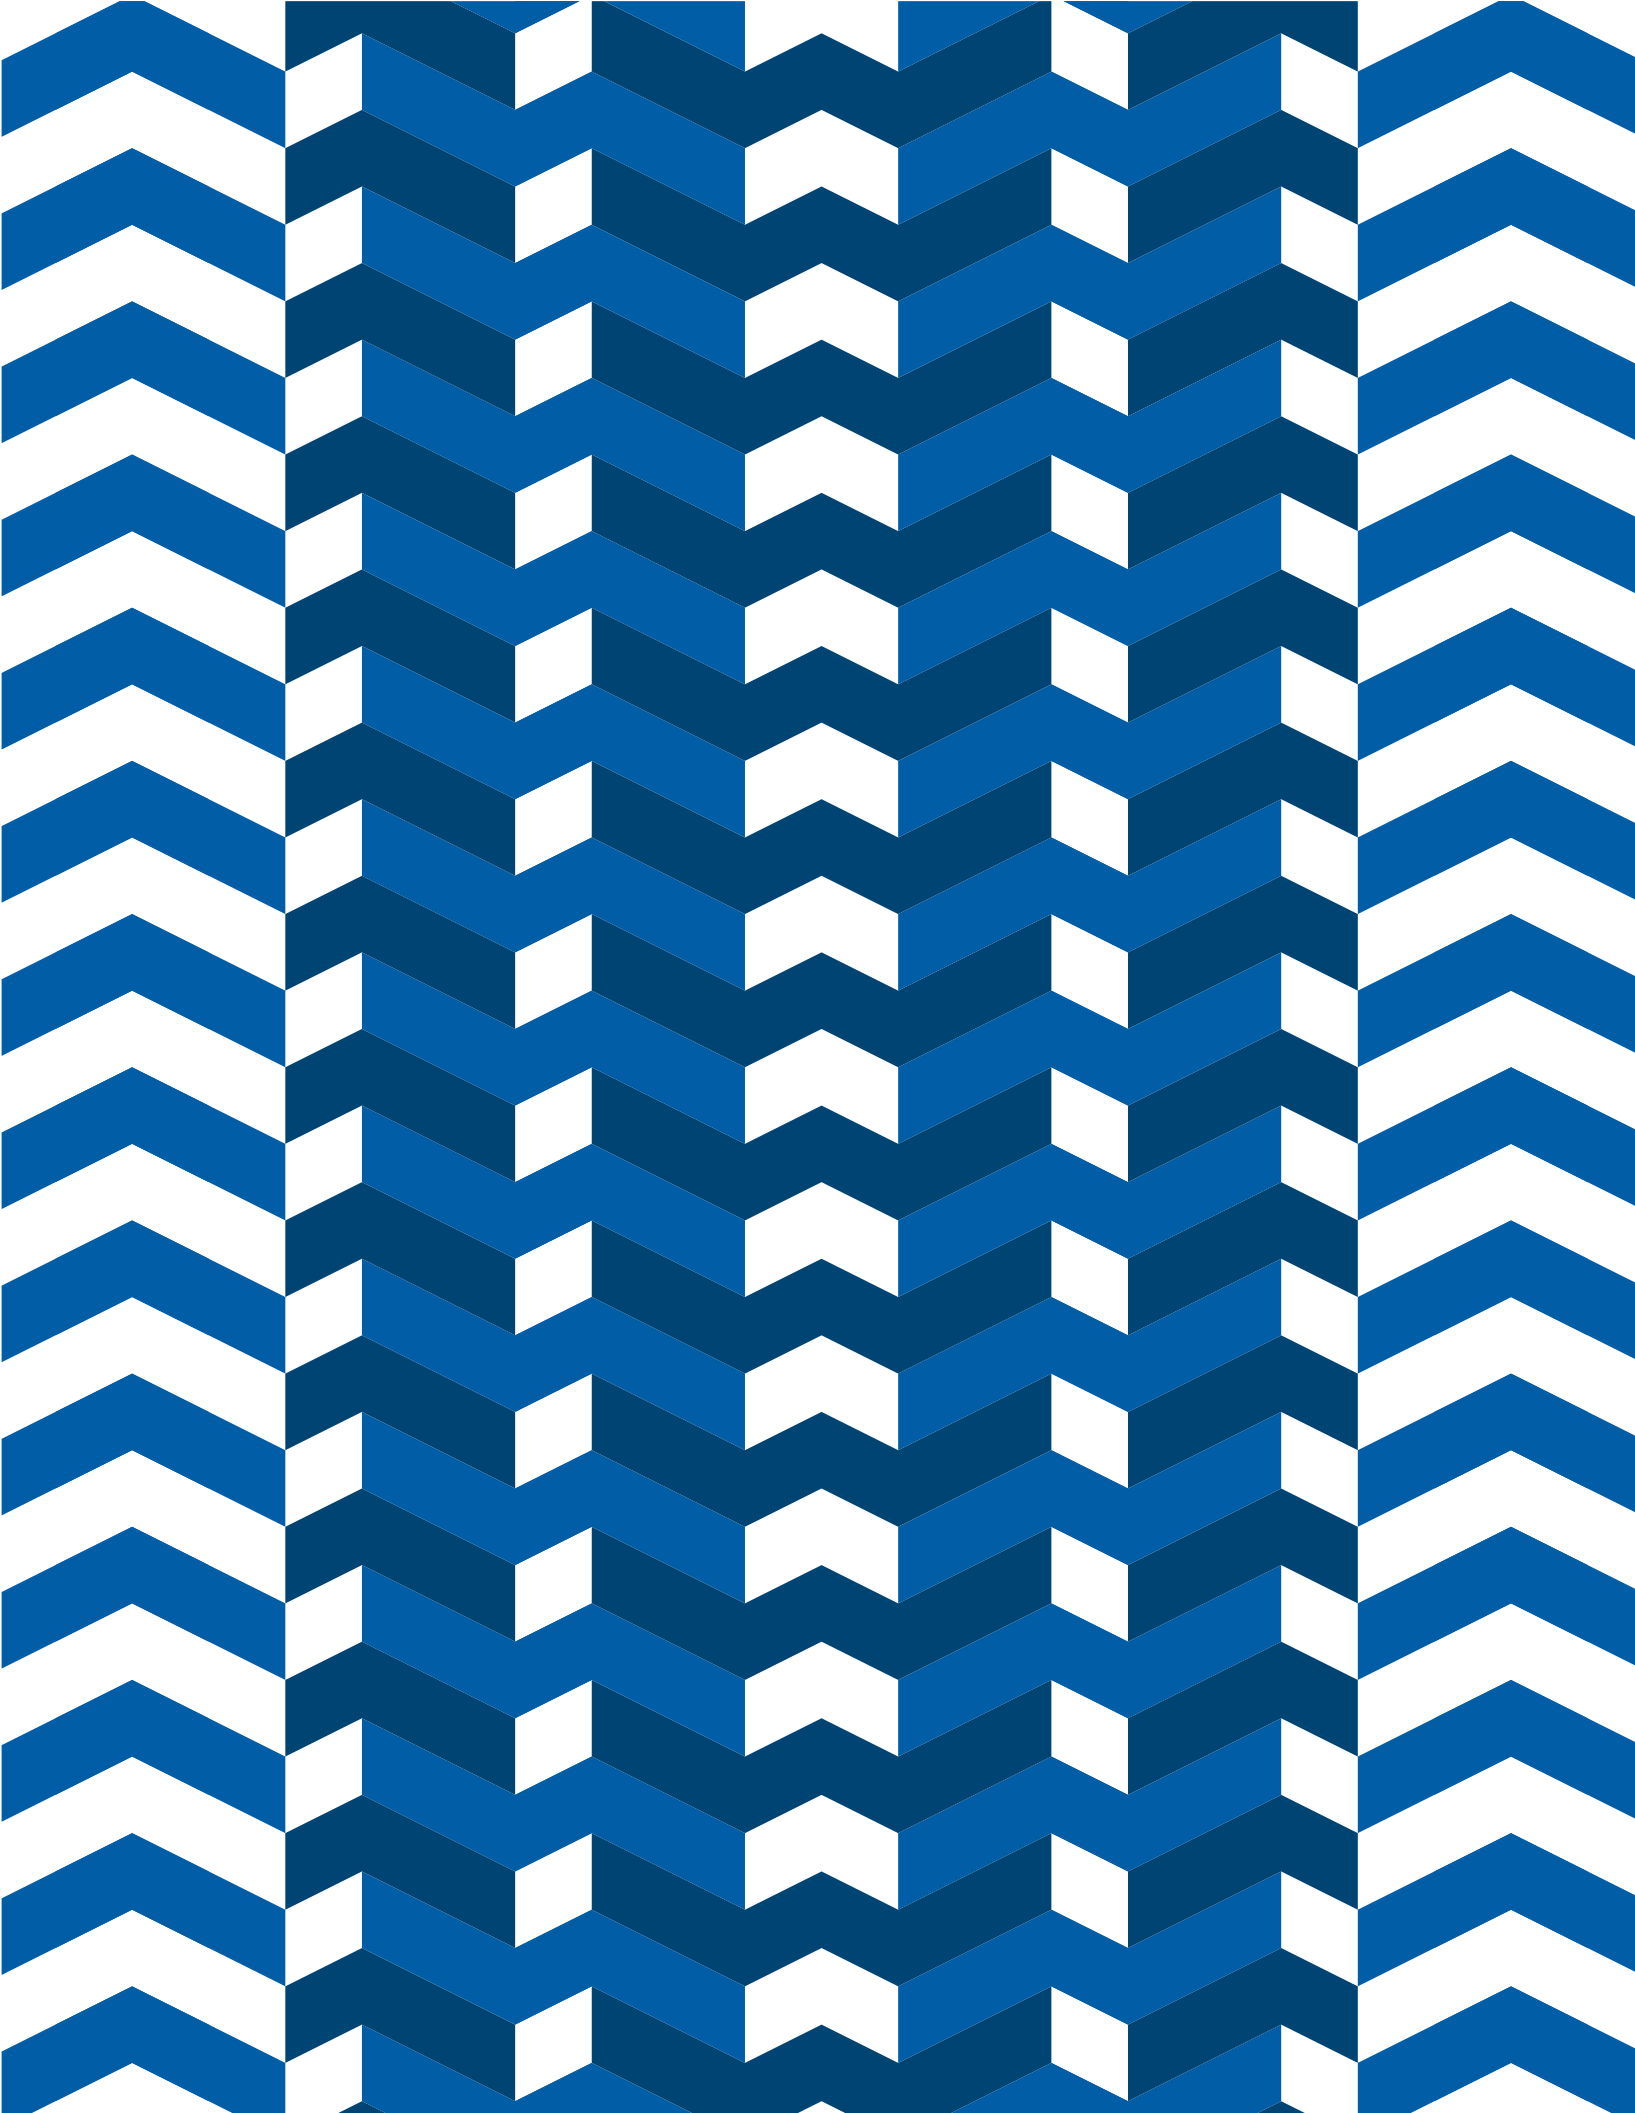


TOUGH
IS OUR
WAY OF
LIFE
CAMSO
ROAD
FREE
COMPANY