



AGRICULTURAL TRACKS AND WHEELS LINEUP FOR CATERPILLAR




For customer service, contact us toll free at 1 844 CAMSOAG, or 1 317 671-7327,
or by email at Ag.ProductSupport@camso.co

CONNECT WITH US FOR EXCLUSIVE CONTENT



camso.co

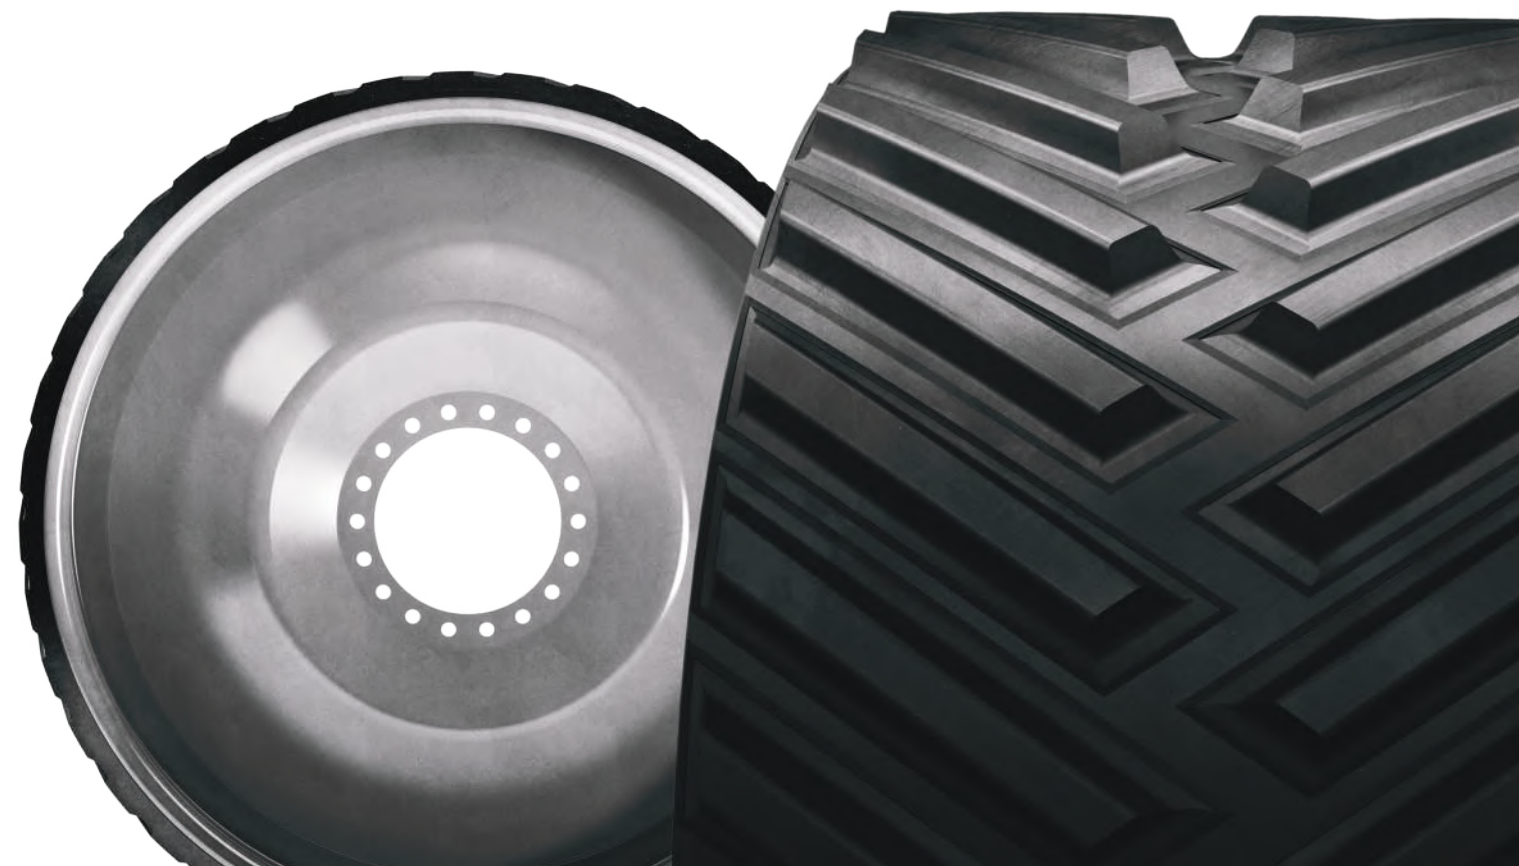



DRIVING FARMING FORWARD

CAMSO AND CATERPILLAR

Every day, we ask ourselves: “Is there a better way to drive farming forward?” We believe there is – by providing mobility solutions to help you get the job done.

At Camso, we do it by developing and manufacturing the broadest range of tracks for all farming applications. Camso tracks increase mobility and flotation, and reduce soil compaction.

From field preparation to planting, harvesting and transport, Camso tracks help maximize your work while lowering your operating costs.

**OUR TRACKS ARE THE APPROVED CHOICE
OF MANUFACTURERS, ENDORSED BY DEALERS
AND RECOGNIZED BY FARMERS.**

COMPLETE LINEUP

CATERPILLAR TRACTORS

Camso offers the broadest range of tracks and replacement wheels for your Caterpillar tractor.

CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES



CAMSO AG
5500



CAMSO AG
3500

CAMSO REPLACEMENT WHEELS



IDLER



DRIVER

SELECT THE RIGHT TRACK FOR YOUR APPLICATION AND FARMING CONDITIONS

CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES

APPLICATION SEVERITY

Heavy tillage, row crop, scraper, ripping including:

- Agricultural scraper
- Extended roading
- Front-blade silage
- Fully mounted roll over plow
- Moderate to severe side slope
- [Plus all applications listed below](#)

Primary tillage and general row crop including:

- Air seeder
- Manure hauling
- Moderate side slope
- Primary tillage (deep ripping chisel plow, etc.)
- Poor footing conditions
- Stalk chopper / rotary cutter



0 to 1000

1000+

SUGGESTED ANNUAL HOUR USAGE



FEATURES AND BENEFITS

CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES



High-grade rubber compounds

Maximizes performance and durability




Long lasting tread bar

Wear-resistant tread compound combined with a design geared towards your application



Strengthened guide lugs

Enhanced guide lug geometry reduces risk of torn guide lugs



Long lasting carcass

Most durable, consistent and predictable performance due to Camso's unique manufacturing and curing process



















Inner carcass impact protection

3500 and 5500 – Inner steel reinforcement reduces the risk of carcass damage
 5500 – Maximum rubber thickness reduces the risk of carcass damage and cable tear in very demanding applications

THE RIGHT TRACK FOR YOUR APPLICATION

CATERPILLAR
35/45/55 AND
65/75/85/95 SERIES



TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
CAMSD AG 5500 Go beyond industry standards	Scraper, ripper, heavy tillage and row crop	1000+	    	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 
CAMSD AG 3500 An industry standard track made to last	General tillage and row crop	0 to 1000	    	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 

DRIVEN BY QUALITY
PERFORMANCE AND DURABILITY FROM THE INSIDE OUT

Camso long lasting carcass

No material displacement during the manufacturing and curing process means:

- Rubber compounds located exactly where you need them
- Uniform tension distribution, minimizing downtime due to carcass tear
- A product with increased durability and performance



DURABLE, CONSISTENT AND PREDICTABLE PERFORMANCE

TECHNICAL SPECIFICATIONS
CATERPILLAR 35/45/55 AND 65/75/85/95 SERIES

CAMSO Track series	CATERPILLAR Tractor model	Track width (in.)	Part number	Tread				Guide lugs		Carcass		
				Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Bias ply	Main cable size (mm)	Thickness (mm)
5500	35/45/55	16	650-1603	48	2.6	2.3	6.8	48	4.8	4	5.4	39
		16	650-1602	48	2.6	2.3	6.8	48	4.8	4	5.4	39
		18	650-1802	96	2.6	2.3	6.8	48	4.8	4	5.4	39
		18	650-1843 High Roding	48LH	2.6	2.3	6.8	48	4.8	4	5.4	39
		18	650-1842 High Roding	48RH	2.6	2.3	6.8	48	4.8	4	5.4	39
		18	650-1841 High Traction	72	2.6	1.5	9	48	4.8	4	5.4	39
		25	650-2502	96	2.6	2.3	6.8	48	4.8	4	5.4	41
	65/75 85/95	25	652-2506	96	2.6	1.5	7.2	48	5	4	5.4	41
		27.5	652-2702 Cast-slotted driver	96	2.6	1.5	7.2	48	5	3	5.4	41
		27.5	652-2713	96	2.6	1.5	7.2	48	5	4	5.4	41
		27.5	652-2714 High Roding	96	2.6	1.9	7.2	48	5	4	5.4	41
		30	652-3055	96	2.6	1.5	7.2	48	5	4	5.4	41
		30	652-3004 Cast-slotted driver	96	2.6	1.5	7.2	48	5	3	5.4	41
		30	652-3052 High Roding	96	2.6	1.9	7.2	48	5	4	5.4	41
3500	35/45/55	16	630-1601	96	2.6	1.5	6.8	36	5.5	3	5.4	31
		18	630-1801	96	2.6	1.5	6.8	36	5.5	3	5.4	31
		25	630-2501	72	2.6	1.5	9	48	5.5	4	4.3	32
		30	630-3009	72	2.6	1.5	9	48	5.5	4	4.3	35
	65/75 85/95	25	632-2529	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		27.5	632-2711	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		27.5	632-2715 Low ground disturbance	96	1.6	2.8	7.2	48	5	3	4.3	36
		30	632-3048	74	2.6	1.5	9.3	36	6.2	3	4.3	36
		30	632-3057 Low ground disturbance	96	1.6	2.8	7.2	48	5	3	4.3	36

Warranty: Camso is the industry standard for warranty coverage on agricultural tracks. Tracks are warrantied against defects in materials and workmanship, and pro-rated based on both time and usage, so customers receive fair value on warranty replacement tracks. Some conditions apply. Refer to the warranty certificate for details. For more info, visit camso.co/agriculture

REPLACEMENT DRIVER AND IDLER WHEELS

WHEEL TECHNICAL SPECIFICATIONS

PRODUCT FAMILY	CAMSO PART NUMBER	OEM PART NUMBER	COATING TYPE	MODEL/TRACK WIDTH COMPATIBILITY
35/45/55				
Idler	1R-1204P	1R-1204	Rubber	All
Driver (RH)	1R-1230P	1R-1230	Rubber	All
Driver (LH)	1R-1231P	1R-1231	Rubber	All
65/75/85/95				
Idler	1R-1346P	1R-1346	Rubber	Solid Idler
Driver (RH)	1R-1184P	1R-1184	Rubber	Inboard Brake
Driver (LH)	1R-1185P	1R-1185	Rubber	Inboard Brake
Driver (RH)	1R-1347P	1R-1347	Rubber	Caliper Brake
Driver (LH)	1R-1348P	1R-1348	Rubber	Caliper Brake

