

AGRICULTURAL TRACKS AND WHEELS LINEUP FOR JOHN DEERE





DRIVING FARMING FORWARD

CAMSO AND JOHN DEERE

Every day, we ask ourselves: “Is there a better way to drive farming forward?” We believe there is – by providing the broadest range of mobility solutions to help you get the job done.

In collaboration with John Deere, we’re committed to offer highly engineered products that respond to the evolution of John Deere tractors.

We’ve worked together to develop and provide track solutions with the best balance between durability and performance to maximize your tractor’s efficiency.

**OUR TRACKS ARE THE APPROVED CHOICE
OF JOHN DEERE, ARE ENDORSED BY DEALERS
AND RECOGNIZED BY FARMERS.**

COMPLETE LINEUP

JOHN DEERE TRACTORS

Camsco offers the broadest range of tracks and replacement wheels for your John Deere tractor.

9RX SERIES



8X00T/8X10T/8X20T/8X30T AND 9X00T/9X20T SERIES




8RX SERIES



8RT/9X30T/9RT SERIES



CAMSco REPLACEMENT WHEELS

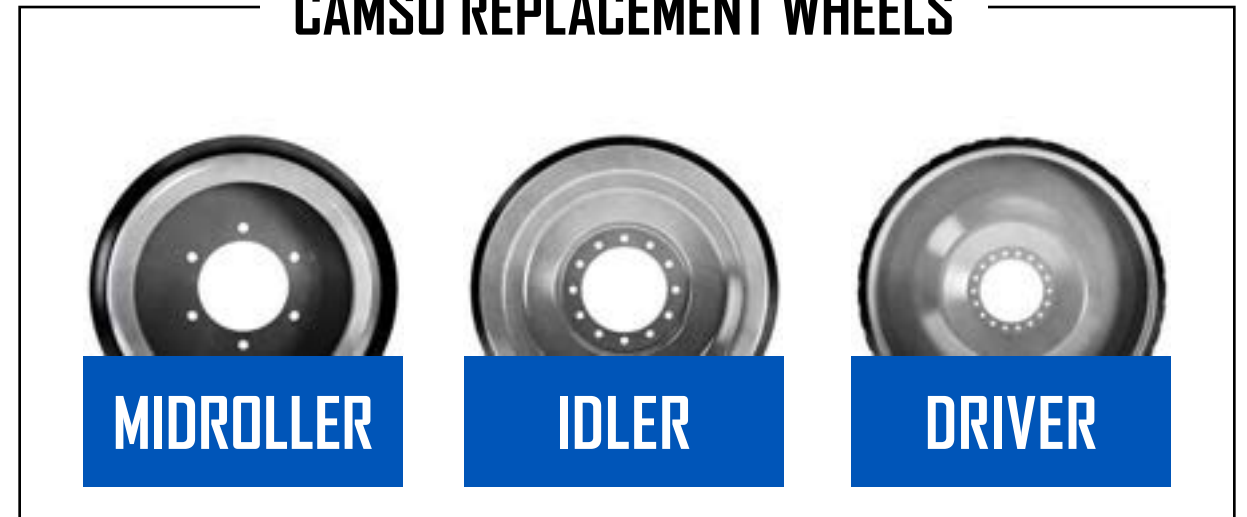



JOHN DEERE 9RX SERIES

DESIGNED TO JOHN DEERE'S SPECIFICATIONS, CAMSO TRACKS PROVIDE THE BEST BALANCE OF TREAD BAR LIFE AND DRIVE LUG DURABILITY TO MAXIMIZE THE PERFORMANCE AND EFFICIENCY OF YOUR TRACTOR.

FEATURES AND BENEFITS

JOHN DEERE 9RX SERIES



High-grade rubber compounds

Maximizes performance and durability



Long lasting tread bar

Provides optimal traction and ride quality

6500 for 9RX narrow: roading tread bar designed to maximize transport efficiency



Long lasting carcass

No material displacement during the manufacturing and curing process means increased durability and performance



Optimized positive drive lugs

Geometry designed specifically for 9RX tractors

















Drive lug reinforcement

6500: Camso's unique feature designed to minimize risk of wear and tear in demanding high-pull applications

THE RIGHT TRACK FOR YOUR APPLICATION

JOHN DEERE
9RX SERIES



9RX Wide (30" and 36")				
TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
CAMSO AG 6500	AG scraper, ripper, heavy tillage and row crop	1000+	    	<p>DRIVE LUG DURABILITY</p> <p>TREAD BAR LIFE</p> <p>CARCASS DURABILITY</p>
CAMSO SCR 6500	Scraper	1000+	    	<p>DRIVE LUG DURABILITY</p> <p>TREAD BAR LIFE</p> <p>CARCASS DURABILITY</p>
CAMSO AG 3500	General tillage and row crop	0 to 1000	   	<p>DRIVE LUG DURABILITY</p> <p>TREAD BAR LIFE</p> <p>CARCASS DURABILITY</p>

John Deere 9RX narrow comes standard with Camso AG 6500 for high-pull applications and roading capabilities

TECHNICAL SPECIFICATIONS
JOHN DEERE 9RX SERIES

Camso Track series	John Deere Tractor model	Track width (in)	Camso Part number	John Deere Part number	Tread bars				Drive lugs	Carcass		
					Qty	Height (in)	Tip width (in)	Pitch (in)	Qty	Bias ply	Main cable size (mm)	Thickness (in)
6500	9RX Wide	30	E30BH02877	R554229	90	2.0	1.7	6.0	45	3	5.4	1.4
		30	E30BH03054	R550589 Scraper	90	1.6	2.4	6.0	45	3	5.4	1.4
		36	E36BH02897	R554230	90	2.0	1.7	6.0	45	3	5.4	1.4
6500	9RX Narrow	18	E18BT03106	R565017	90	1.6	2.4	6.0	45	3	5.4	1.4
		24	E24BT03107	R565018	90	1.6	2.4	6.0	45	3	5.4	1.4
3500	9RX Wide	30	B30BH03053	R550588	90	2.0	1.7	6.0	45	3	5.4	1.4
		36	B36BH03047	R550228	90	2.0	1.7	6.0	45	3	5.4	1.4



Warranty: Camso is the industry standard for warranty coverage on Agricultural tracks. Tracks are warrantied against defects in materials and workmanship, and prorated based on both time and usage, so customers receive fair value on warranty replacement tracks. Some conditions apply. Refer to the warranty certificate for details. For more info, visit camso.co/agriculture



JOHN DEERE 8RX SERIES

SPECIFICALLY DESIGNED AND RIGOROUSLY TESTED FOR THE JOHN DEERE 8RX, THE NEW CAMSO 4500 HIGH ROADING TRACK ALLOWS FOR MAXIMUM TRAVEL SPEED WHILE MAINTAINING IN-FIELD PERFORMANCE AND DURABILITY.

Up to 25 miles an hour, actual results will vary.

FEATURES AND BENEFITS

JOHN DEERE 8RX SERIES



High-grade rubber compounds
Maximizes performance and durability



High roading tread bar
New tread bar designed for transport



Long lasting carcass
No material displacement during the manufacturing and curing process means increased durability and performance



Drive lug specifically designed for 8RX
Drive lugs and sprocket developed together to maximize track life



High-technology carcass
Unique carcass specifically tailored for the John Deere 8RX

TECHNICAL SPECIFICATIONS
JOHN DEERE 8RX SERIES

FRONT

Camso Track series	John Deere Tractor model	Track width (in)	Camso Part number	John Deere Part number	Tread bars				Drive lugs	Carcass		
					Qty	Height (in)	Tip width (in)	Pitch (in)	Qty	Bias ply	Main cable size (mm)	Thickness (in)
RD 4500	8RX	18	F18CD03570	R571655	70	1.6	3.2	6	35	4	5.4	1.3
		24	F24CD03574	R571656	70	1.6	2.4	6	35	4	5.4	1.3

REAR

Camso Track series	John Deere Tractor model	Track width (in)	Camso Part number	John Deere Part number	Tread bars				Drive lugs	Carcass		
					Qty	Height (in)	Tip width (in)	Pitch (in)	Qty	Bias ply	Main cable size (mm)	Thickness (in)
RD 4500	8RX	18	F18CA03569	R571658	84	1.6	3.2	6	42	4	5.4	1.3
		24	F24CA03573	R571659	84	1.6	2.4	6	42	4	5.4	1.3
		30	F30CA03717	TR129219	84	1.6	2.4	6	42	4	5.4	1.3



JOHN DEERE

8RT / 9X30T / 9RT SERIES

DESIGNED TO JOHN DEERE'S SPECIFICATIONS, CAMSO TRACKS PROVIDE THE BEST BALANCE OF TREAD BAR LIFE AND CARCASS DURABILITY TO MAXIMIZE THE PERFORMANCE AND EFFICIENCY OF YOUR TRACTOR.



SELECT THE RIGHT TRACK FOR YOUR APPLICATION AND FARMING CONDITIONS

8RT / 9X30T / 9RT SERIES

APPLICATION SEVERITY

Heavy tillage, row crop, scraper, ripping including:

- Agricultural scraper
- Extended roading
- Front-blade silage
- Fully mounted roll over plow
- Moderate to severe side slope
- [Plus all applications listed below](#)

Primary, secondary tillage and general row crop including:

- Air seeder
- Manure hauling
- Moderate side slope
- Primary tillage (deep ripping chisel plow, etc.)
- Poor footing conditions
- Stalk chopper / rotary cutter
- Grain cart
- Moderate side slope
- Pull-type forage harvester
- Row crop planter
- Secondary tillage (field cultivator, disk, etc.)
- Spraying

**CAMSO AG
6500**

**CAMSO AG
4500**

0 to 1000

1000 +

SUGGESTED ANNUAL HOUR USAGE



FEATURES AND BENEFITS

8RT / 9X30T / 9RT SERIES



High-grade rubber compounds
Maximizes performance and durability



Long lasting tread bar
Wear-resistant tread compound combined with a design geared towards your application




Strengthened guide lugs
Enhanced guide lug geometry reduces risk of torn guide lugs



Long lasting carcass
Most durable, consistent and predictable performance due to Camso's unique manufacturing and curing process



High tensile strength main cables
Designed to resist high tension and tractive effort
6500 – 16.5 in. and 18 in. row crop and 30 in. scraper tracks come standard with an industry-leading 6.7 mm main cable to minimize carcass tear

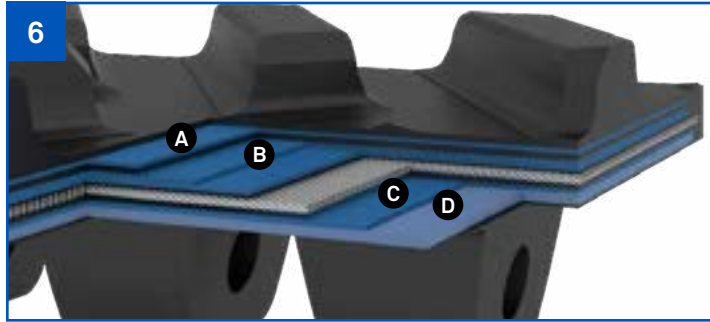


















Impact-resistant carcass

- A** Steel reinforcement ply for added rigidity and stubble damage resistance
- B** 6500 only: Fatigue-resistant reinforcement for extended track life and increased load-bearing capacity
- C** High-impact steel reinforcement to reduce the risk of carcass tear and separation
- D** 6500 only: puncture-resistant rubber layer to reduce the risk of carcass tear and separation in very demanding applications

THE RIGHT TRACK FOR YOUR APPLICATION

JOHN DEERE
8RT
9X30T / 9RT SERIES

TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
CAMSO AG 6500 Unmatched performance, durability and reliability	Scraper, ripper, heavy tillage and row crop	1000+	 1  2  3  4  5  6	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 
CAMSO AG 4500 High performance, value-driven	General tillage, secondary tillage and row crop	0 to 1000	 1  2  3  4  6	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 



REMANUFACTURING PROGRAM

DON'T FORGET: YOUR CORE HAS A VALUE

Our Certified Remanufacturing Program provides you with an economical, effective and durable solution for general agriculture applications that will extend the use of your tracks and wheels.

Contact your Camso authorized dealer or visit camso.co to learn more about our program.

GIVE MULTIPLE LIVES TO A PRODUCT YOU'VE ALWAYS TRUSTED.

CAMSO'S CERTIFIED REMANUFACTURING PROGRAM
IS AVAILABLE FOR FRICTION DRIVE TRACKS

TECHNICAL SPECIFICATIONS

JOHN DEERE 8RT / 9X30T / 9RT SERIES

Camso Track series	John Deere Tractor model	Track width (in)	Camso Part number	John Deere Part number	Tread bars				Guide lugs		Carcass		
					Qty	Height (in)	Tip width (in)	Pitch (in)	Qty	Length (in)	Bias ply	Main cable size (mm)	Thickness (in)
6500	8RT	16.5	E16AY03237	R563760	100	2.8	2.5	7.3	46	5.3	4	6.7	1.7
		16.5	E16AY02945	R545854 Diagonal TB (LH)	50	2.8	2.5	7.3	46	5.3	4	6.7	1.7
		16.5	E16AY02944	R545855 Diagonal TB (RH)	50	2.8	2.5	7.3	46	5.3	4	6.7	1.7
		18	E18AY02948	R545859	100	2.8	2.5	7.3	46	5.3	4	6.7	1.7
		25	E25AY03011	R545862	100	2.8	2.5	7.3	46	5.3	4	5.4	1.7
		30	E30AY03013	R545864	100	2.8	2.5	7.25	46	5.3	4	5.4	1.6
	9X30T/9RT	30	E30AV03019	R545868	88	2.9	2.7	9.0	50	5.3	4	5.4	1.7
		30	E30AV02954	R545869 Scraper	88	2.3	3.0	9.0	50	5.3	4	6.7	1.7
		36	E36AV03021	R545871	88	2.9	2.7	9.0	50	5.3	4	5.4	1.7
4500	8RT	16.5	F16AY03238	N/A	100	2.6	1.6	7.3	46	4.5	4	5.4	1.5
		16.5	F16AY02947	R545852 Diagonal TB (LH)	50	2.6	1.6	7.3	46	4.5	4	5.4	1.5
		16.5	F16AY02946	R545853 Diagonal TB (RH)	50	2.6	1.6	7.3	46	4.5	4	5.4	1.5
		18	F18AY02951	R545856	100	2.6	1.6	7.3	46	4.5	4	5.4	1.5
		24	F24AY03010	R545860	100	2.6	1.6	7.3	46	4.5	4	5.4	1.5
		25	F25AY02952	R545865 Side hill	100	2.6	1.6	7.3	46	5.3	4	5.4	1.5
		25	F25AY03012	R545861	100	2.6	1.6	7.25	46	4.5	4	5.4	1.5
		30	F30AY02953	R545866 Side hill	100	2.6	1.6	7.25	46	5.3	4	5.4	1.5
		30	F30AY03014	R545863	100	2.6	1.6	7.3	46	4.5	4	5.4	1.5
	9X30T/9RT	30	F30AV03020	R545867	88	2.6	2.2	9.0	50	4.5	4	5.4	1.5
		30	F30AV02955	R545872 Side hill	88	2.6	2.2	9.0	50	5.3	4	5.4	1.5
		36	F36AV03022	R545870	88	2.6	2.2	9.0	50	4.5	4	5.4	1.5

Camso guide lug replacement kit		
John Deere Tractor model	Camso Part number	John Deere Part number
8RT	GL07065	RE343170
9X30T/9RT	GL07064	RE343173



JOHN DEERE

8X00T / 8X10T

8X20T / 8X30T

9X00T / 9X20T SERIES

DESIGNED TO JOHN DEERE'S SPECIFICATIONS, CAMSO TRACKS PROVIDE THE BEST BALANCE OF TREAD BAR LIFE AND CARCASS DURABILITY TO MAXIMIZE THE PERFORMANCE AND EFFICIENCY OF YOUR JOHN DEERE TRACTOR.



SELECT THE RIGHT TRACK FOR YOUR APPLICATION AND FARMING CONDITIONS

8X00T / 8X10T / 8X20T / 8X30T / 9X00T / 9X20T SERIES

APPLICATION SEVERITY

Heavy tillage, row crop, scraper, ripping including:

- Agricultural scraper
- Extended roading
- Front-blade silage
- Fully mounted roll over plow
- Moderate to severe side slope
- [Plus all applications listed below](#)

**CAMSO AG
5500**

Primary, secondary tillage and general row crop including:

- Air seeder
- Manure hauling
- Moderate side slope
- Primary tillage (deep ripping chisel plow, etc.)
- Poor footing conditions
- Stalk chopper / rotary cutter
- Grain cart
- Moderate side slope
- Pull-type forage harvester
- Row crop planter
- Secondary tillage (field cultivator, disk, etc.)
- Spraying

**CAMSO AG
3500**

0 to 1000

1000 +

SUGGESTED ANNUAL HOUR USAGE



FEATURES AND BENEFITS

JOHN DEERE 8X00T / 8X10T / 8X20T / 8X30T
9X00T / 9X20T SERIES



High-grade rubber compounds

Maximizes performance and durability



Long lasting tread bar

Wear-resistant tread compound combined with a design geared towards your application



Strengthened guide lugs

Enhanced guide lug geometry reduces risk of torn guide lugs



Long lasting carcass

Most durable, consistent and predictable performance due to Camso's unique manufacturing and curing process



















Inner carcass impact protection

3500 and 5500 – Inner steel reinforcement reduces the risk of carcass damage
5500 – Maximum rubber thickness reduces the risk of carcass damage and cable tear in very demanding applications

THE RIGHT TRACK FOR YOUR APPLICATION

JOHN DEERE
 8X00T / 8X10T
 8X20T / 8X30T
 9X00T / 9X20T SERIES



TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
CAMSD AG 5500 Go beyond industry standards	Scraper, ripper, heavy tillage and row crop	1000+	     <p>High-grade rubber compounds Long lasting tread bar Strengthened guide lugs Longest lasting carcass Inner carcass impact protection</p>	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 
CAMSD AG 3500 An industry-standard track made to last	General tillage, secondary tillage and row crop	0 to 1000	     <p>High-grade rubber compounds Long lasting tread bar Strengthened guide lugs Longest lasting carcass Inner carcass impact protection</p>	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 

TECHNICAL SPECIFICATIONS

JOHN DEERE 8X00T / 8X10T / 8X20T / 8X30T / 9X00T / 9X20T SERIES

Camso Track series	John Deere Tractor model	Track width (in)	John Deere Part number	Tread bars				Guide lugs		Carcass		
				Quantity	Height (in)	Tip width (in)	Pitch (in)	Quantity	Length (in)	Bias ply	Main cable size (mm)	Thickness (in)
3500	8X00T to 8X30T	16.5	R241742	96	2.6	2.2	6.9	48	4.1	3	5.4	1.3
		18	R241743	96	2.6	1.5	6.9	48	4.1	4	5.4	1.3
		25	R220829 High traction	78	2.6	1.5	8.5	48	4.1	4	4.3	1.3
		25	R241745	96	2.6	1.5	6.9	48	4.1	4	4.3	1.3
		30	R292526 High traction	78	2.6	1.5	8.5	48	4.1	4	4.3	1.4
		30	R292528	96	2.6	1.5	6.9	48	4.1	4	4.3	1.3
	9X00T to 9X20T	30	R257977	92	2.8	1.6	8.4	54	4.5	4	5.4	1.5
		36	R257978	92	2.8	1.6	8.4	54	4.5	4	5.4	1.5
5500	8X00T to 8X30T	16.5	R222975 Diagonal TB (LH)	48	2.6	2.2	6.9	48	4.7	4	5.4	1.6
		16.5	R222974 Diagonal TB (RH)	48	2.6	2.2	6.9	48	4.7	4	5.4	1.6
		18	R312148 Diagonal TB (LH)	48	2.6	2.2	6.9	48	4.2	4	5.4	1.5
		18	R312149 Diagonal TB (RH)	48	2.6	2.2	6.9	48	4.2	4	5.4	1.5
		18	R222976	96	2.6	2.2	6.9	48	4.7	4	5.4	1.6
		25	R241750	96	2.6	2.2	6.9	48	4.7	4	5.4	1.6
		30	R292531	96	2.6	2.2	6.9	48	4.7	4	5.4	1.6
	9X00T to 9X20T	30	R241748	92	2.9	2.7	8.4	54	5.3	4	5.4	1.6
		36	R241749	92	2.9	2.7	8.4	54	5.3	4	5.4	1.6

Camso guide lug replacement kit	
John Deere Tractor model	John Deere Part number
8X00T to 8X30T	RE343169
9X00T to 9X20T	RE343172

DRIVEN BY QUALITY

PERFORMANCE AND DURABILITY FROM THE INSIDE OUT

Camso longest lasting carcass

No material displacement during the manufacturing and curing process means:

- Rubber compounds located exactly where you need them
- Uniform tension distribution, minimizing downtime due to carcass tear
- A product with increased durability and performance



DURABLE, CONSISTENT AND PREDICTABLE PERFORMANCE

REPLACEMENT DRIVER, IDLER AND MIDROLLER WHEELS

We offer the broadest range of rubber and polyurethane (PU) wheels for all John Deere tractors.


Engineered based on manufacturer's specifications

Driver and idler wheels available in rubber only

Midroller wheels available in PU and rubber

CAMSO POLYURETHANE MIDROLLERS

Heat resistance

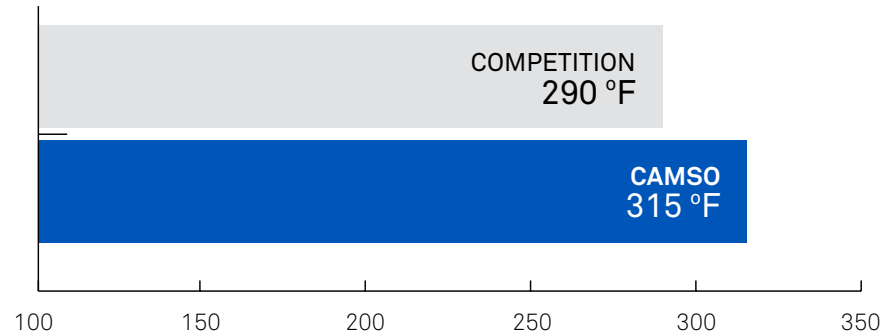

- Designed for today's high-temperature operations, especially during transport

- 25% improvement in chunking resistance vs. rubber

12-month material and workmanship defect warranty

CAMSO PU MIDROLLERS ARE SPECIFICALLY ENGINEERED TO IMPROVE HEAT TOLERANCE FOR EXTENDED WHEEL LIFE.

WHEEL TECHNICAL SPECIFICATIONS

TRACK SERIES	PART NUMBER	OEM PART NUMBER	COATING TYPE	MODEL/TRACK WIDTH COMPATIBILITY
8X20T-8X30T				
Midroller	4W-0003PJD	RE254786	Rubber	16-18 (Narrow)
Midroller	4W-0106PJD	RE251071	Rubber	25-30 (Wide)
8RT				
Midroller	4W-5001PJD	RE576549	Polyurethane	16-24 (Narrow)
Midroller	4W-0150PJD	RE266293	Rubber	16-24 (Narrow)
Midroller	4W-0158PJD	RE272331	Rubber	25-30 (Wide)
Idler	5W-0192PJD	RE265435	Rubber	All
Driver (LH)	3W-0204PJD	RE265436	Rubber	16-24 (Narrow)
Driver (RH)	3W-0206PJD	RE265437	Rubber	16-24 (Narrow)
Driver (RH)	3W-0208PJD	RE266292	Rubber	25-30 (Wide)
Driver (LH)	3W-0210PJD	RE266291	Rubber	25-30 (Wide)
9X20T				
Midroller	4W-5003PJD	RE576550	Polyurethane	All
Midroller	4W-0106PJD	RE251071	Rubber	All
9X30T / 9RT				
Midroller	4W-5003PJD	RE576550	Polyurethane	All
Midroller	4W-0106PJD	RE251071	Rubber	All
Idler	5W-0142PJD	RE242795	Rubber	All
Driver (LH)	3W-0119PJD	RE242803	Rubber	All
Driver (RH)	3W-0120PJD	RE242804	Rubber	All
9RX				
Midroller	4W-5011PJD	RE575013	Polyurethane	All
Midroller	4W-5015PJD	RE575988	Polyurethane	
Midroller	4W-5022PJD	RE581141	Polyurethane	
Idler	5W-0387PJD	RE581208	Rubber	
Idler	5W-0391PJD	RE581209	Rubber	
Idler	5W-0338PJD	RE575989	Rubber	





PRINTED IN CANADA

We are dedicated to supporting farmers in every step of their operations. For customer service, contact us toll free at 1 844 CAMSOAG, or 1 317 671-7327, or by email at Ag.ProductSupport@camso.co

**CONNECT WITH US
FOR EXCLUSIVE CONTENT**



camso.co

