



AGRICULTURAL TRACKS AND WHEELS LINEUP FOR AGCO




We are dedicated to supporting farmers in every step of their operations. For customer service, contact us toll free at 1 844 CAMSOAG, or 1 317 671-7327, or by email at Ag.ProductSupport@camso.co

CONNECT WITH US FOR EXCLUSIVE CONTENT



camso.co

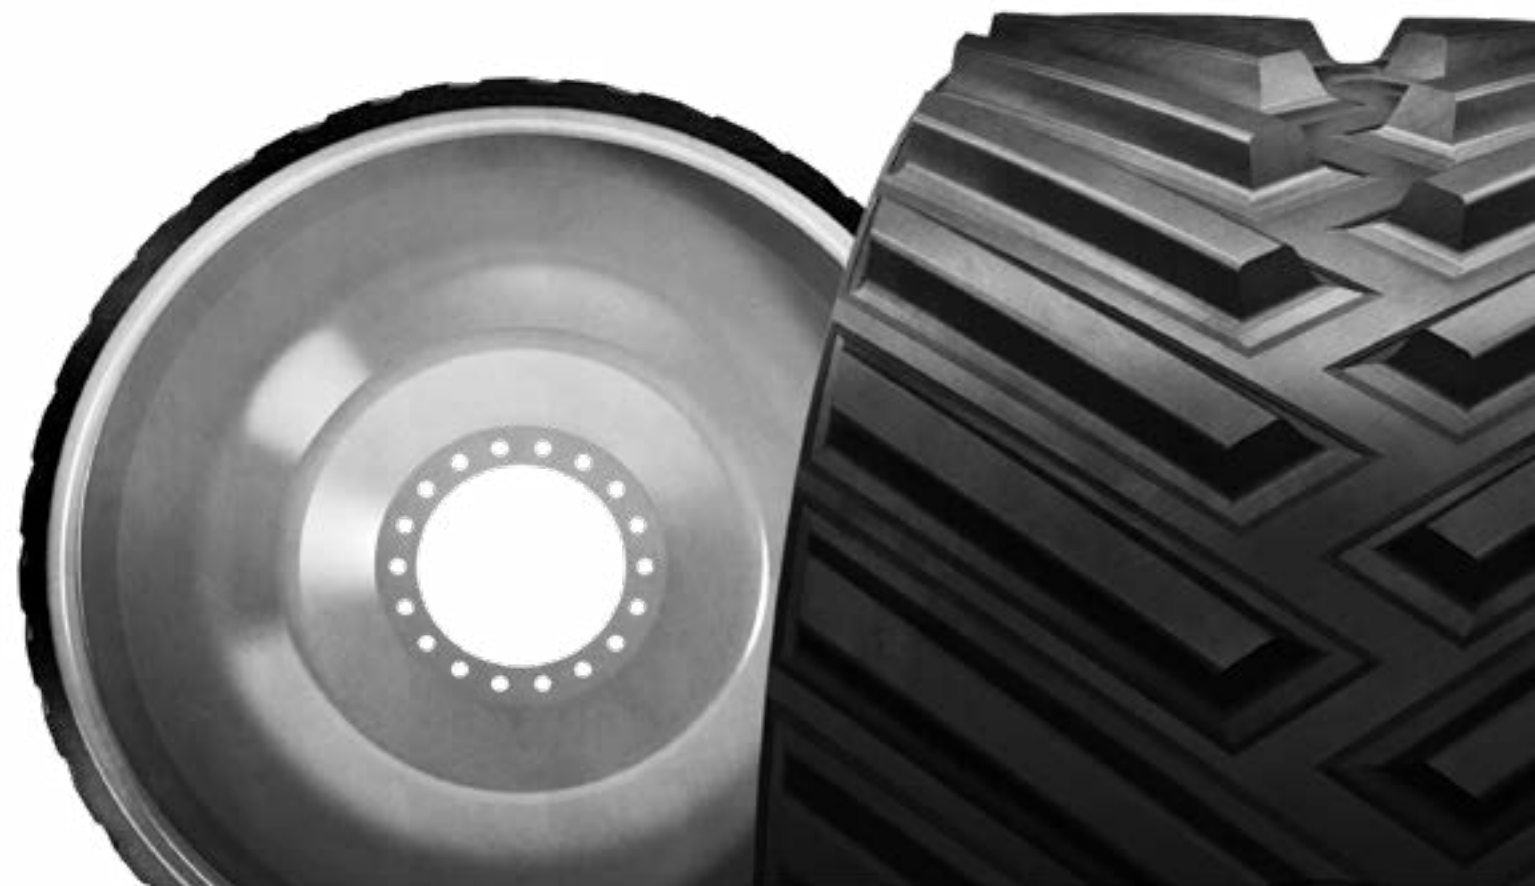



DRIVING FARMING FORWARD

CAMSO AND AGCO

Every day, we ask ourselves: “Is there a better way to drive farming forward?” We believe there is – by providing mobility solutions to help you get the job done.

Camso develops and manufactures the broadest range of tracks for all farming applications. Camso tracks increase mobility and flotation, and reduce soil compaction.

From field preparation to planting, harvesting and transport, Camso tracks help maximize your work while lowering your operating costs.

**CAMSO TRACKS ARE THE APPROVED CHOICE
OF AGCO, ENDORSED BY DEALERS
AND RECOGNIZED BY FARMERS.**

COMPLETE LINEUP

AGCO TRACTORS

Camsco offers the broadest range of tracks and replacement wheels for your AGCO tractor.

CHALLENGER MT700 AND MT800 SERIES



CAMSO AG
6500



CAMSO AG
4500

CAMSCO REPLACEMENT WHEELS



MIDROLLER



IDLER



DRIVER

CHALLENGER MT700 AND MT800 SERIES

DESIGNED TO AGCO'S
SPECIFICATIONS, CAMSO TRACKS
PROVIDE THE BEST BALANCE
OF TREAD BAR LIFE AND CARCASS
DURABILITY TO MAXIMIZE THE
PERFORMANCE AND EFFICIENCY
OF YOUR TRACTOR.



SELECT THE RIGHT TRACK FOR YOUR APPLICATION AND FARMING CONDITIONS

MT700 AND MT800 SERIES

APPLICATION SEVERITY

Heavy tillage, row crop, scraper, ripping including:

- Agricultural scraper
- Extended roading
- Front-blade silage
- Fully mounted roll over plow
- Moderate to severe side slope
- [Plus all applications listed below](#)

Primary, secondary tillage and general row crop including:

- Air seeder
- Manure hauling
- Moderate side slope
- Primary tillage (deep ripping chisel plow, etc.)
- Poor footing conditions
- Stalk chopper
- Grain cart
- Pull-type forage harvester
- Row Crop Planter
- Secondary tillage (field cultivator, disk, etc.)
- Spraying




0 to 1000

1000+

SUGGESTED ANNUAL HOUR USAGE



FEATURES AND BENEFITS



High-grade rubber compounds

Maximizes performance and durability



Long lasting tread bar

Wear-resistant tread compound combined with a design geared towards your application



Strengthened guide lugs

Enhanced guide lug geometry reduces risk of torn guide lugs




Long lasting carcass

Durable, consistent and predictable performance due to Camso's unique manufacturing and curing process



High tensile strength main cables

Designed to resist high tension and tractive effort, typical to friction drive
6500 – 16.5 in. and 18 in. row crop and 30 in. scraper come standard with an industry-leading 6.7 mm main cable to minimize carcass tear

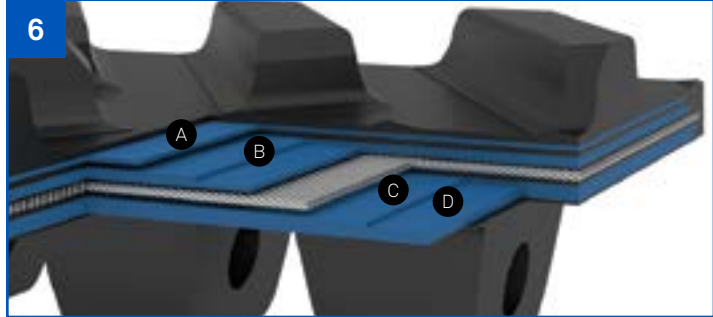


















Impact-resistant carcass

- A** Steel reinforcement ply for added rigidity and stubble damage resistance
- B** **6500**: Fatigue-resistant reinforcement for extended track life and increased load-bearing capacity
- C** High-impact steel reinforcement to reduce the risk of carcass tear and separation
- D** **6500**: puncture-resistant rubber layer to reduce the risk of carcass tear and separation in very demanding applications

THE RIGHT TRACK FOR YOUR APPLICATION

FOR CHALLENGER MT700 AND MT800 SERIES

TRACK SERIES	APPLICATIONS	SUGGESTED ANNUAL HOUR USAGE	FEATURES	PERFORMANCE
CAMSD AG 6500 Unmatched performance, durability and reliability	Heavy tillage, row crop, scraper, ripper	1000+	     	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 
CAMSD AG 4500 High performance, value-driven	Primary, secondary tillage and general row crop	0 to 1000	    	TREAD LIFE  CARCASS DURABILITY  SIDE LOAD RESISTANCE 





REMANUFACTURING PROGRAM

DON'T FORGET: YOUR CORE HAS A VALUE

Your worn tracks and wheels can now be remanufactured. Certified remanufactured products provides you with an economical, effective and durable solution for general agriculture applications that will extend the use of your tracks and wheels.

Available for all friction drive tractors 18", 25", 27.5", 30", and 36" in track width.




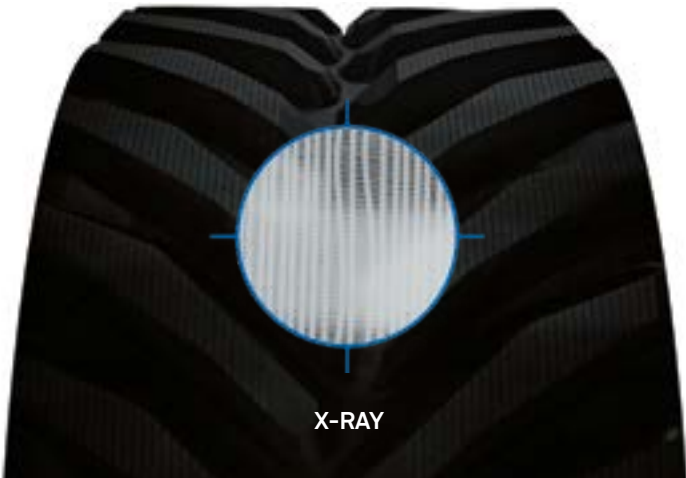
DRIVEN BY QUALITY

PERFORMANCE AND DURABILITY FROM THE INSIDE OUT

Camso long lasting carcass

No material displacement during the manufacturing and curing process means:

- Rubber compounds located exactly where you need them
- Uniform tension distribution, minimizing downtime due to carcass tear
- A product with increased durability and performance

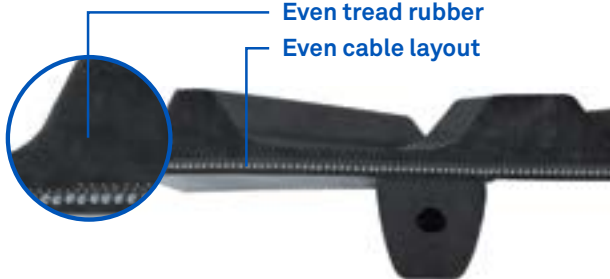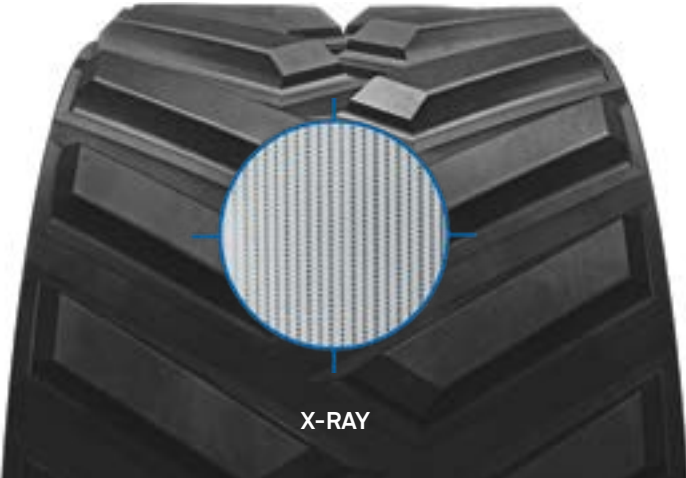CAMSO'S UNIQUE SINGLE CURE PROCESS	COMPETITOR MOLDING PROCESS
 <p>Even tread rubber Even cable layout</p>  <p>X-RAY</p>	  <p>X-RAY</p>
DURABLE, CONSISTENT AND PREDICTABLE PERFORMANCE	

TECHNICAL SPECIFICATIONS
CHALLENGER MT700 AND MT800 SERIES

AGCO Tractor model	Track series	Track width (in.)	Camso Part Number	OEM Part Number	Description	Tread				Guide lugs		Carcass		
						Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Bias ply	Main cable size (mm)	Thickness (mm)
MT700 A to E	6500	14.5	E14AR02909	581839D1	General AG	46	3,0	2,5	7,8	46	5,5	4	6,7	44
		14.5	E14AR02908	581838D1	General AG	46	3,0	2,5	7,8	46	5,5	4	6,7	44
		16.5	E16AR02920	581845D1	General AG	46	3,0	2,5	7,8	46	5,5	4	6,7	44
		16.5	E16AR02919	581844D1	General AG	46	3,0	2,5	7,8	46	5,5	4	6,7	44
		18	E18AR02923	581848D1	General AG	92	3,0	2,5	7,8	46	5,5	4	6,7	44
		18	E18AR02925		High roading	46	3,0	2,5	7,8	46	5,5	4	6,7	44
		18	E18AR02924		High roading	46	3,0	2,5	7,8	46	5,5	4	6,7	44
		25	E25AR02990	581853D1	High roading	92	3,0	2,5	7,8	46	5,5	4	5,4	42
		25	E25AR02989	581854D1	General AG	92	2,7	1,6	7,8	46	5,5	4	5,4	42
		30	E30AR02994	581856D1	High roading	92	3,0	2,5	7,8	46	5,5	4	5,4	42
		30	E30AR02993	581857D1	General AG	92	2,7	1,6	7,8	46	5,5	4	5,4	41
		34	E34AR03102	581859D1	General AG	46	2,7	1,6	7,8	46	4,7	4	5,4	42
		4500	16,5	F16AR02922	581843D1	General AG	46	2,7	1,6	7,8	46	4,7	4	5,4
	16,5		F16AR02921	581842D1	General AG	46	2,7	1,6	7,8	46	4,7	4	5,4	37
	18		F18AR02926	581846D1	General AG	92	2,7	1,6	7,8	46	4,7	4	5,4	37
	18		F18AR02927	581847D1	LGD	130	1,5	2,8	5,5	46	4,7	4	5,4	37
	24		F24AR02868		General AG	92	2,7	1,6	7,8	46	4,7	4	5,4	37
	25		F25AR02992	581852D1	LGD	130	1,6	2,8	5,5	46	4,7	4	5,4	37
	25		F25AR02991	581851D1	General AG	92	2,7	1,6	7,8	46	4,7	4	5,4	37
	25		F25AR02928		General AG - Side slope	92	2,7	1,6	7,8	46	4,7	4	5,4	37
	30		F30AR02995	581855D1	General AG	92	2,7	1,6	7,8	46	4,7	4	5,4	37
	30		F30AR02929		General AG - Side slope	92	2,7	1,6	7,8	46	4,7	4	5,4	37
	34		F34AR03101	581858D1	General AG	46	2,7	1,6	7,8	46	4,7	4	5,4	37

TECHNICAL SPECIFICATIONS
CHALLENGER MT700 AND MT800 SERIES

AGCO Tractor model	Track series	Track width (in.)	Camso Part Number	OEM Part Number	Description	Tread				Guide lugs		Carcass				
						Qty	Height (in.)	Tip width (in.)	Pitch (in.)	Qty	Length (in.)	Bias ply	Main cable size (mm)	Thickness (mm)		
MT738, 740, 743	6500	14	E14BY03116	588707D1	General AG	47	3,0	2,5	7,7	48	5,5	4	6,7	44		
		14	E14BY03117	588708D1	General AG	47	3,0	2,5	7,7	48	5,5	4	6,7	44		
		16	E16BY03201	588713D1	General AG	47	3,0	2,5	7,7	48	5,5	4	6,7	44		
		16	E16BY03202	588714D1	General AG	47	3,0	2,5	7,7	48	5,5	4	6,7	44		
		18	E18BY03203	588717D1	General AG	94	3,0	2,5	7,7	48	5,5	4	6,7	44		
		25	E25BY03115	588721D1	General AG	94	2,7	1,6	7,7	48	5,5	4	5,4	42		
		25	E25BY03204	588722D1	High Roding	94	3,0	2,5	7,7	48	5,5	4	5,4	42		
		30	E30BY03205	588724D1	General AG	94	2,7	1,6	7,7	48	5,5	4	5,4	42		
		30	E30BY03206	588725D1	High Roding	94	3,0	2,5	7,7	48	5,5	4	5,4	42		
		34	E34BY03207	588727D1	General AG	94	2,7	1,6	7,7	48	5,5	4	5,4	42		
		4500	16	F16BY03127	588709D1	General AG	47	2,7	1,6	7,7	48	4,7	4	5,4	37	
			16	F16BY03128	588710D1	General AG	47	2,7	1,6	7,7	48	4,7	4	5,4	37	
			18	F18BY03229	588715D1	General AG	94	2,7	1,6	7,7	48	4,7	4	5,4	37	
	18		F18BY03230	588716D1	LGD	132	1,6	2,8	5,5	48	4,7	4	5,4	37		
	25		F25BY03114	588622D1	General AG	94	2,7	1,6	7,7	48	4,7	4	5,4	37		
	25		F25BY03233	588720D1	LGD	132	1,6	2,8	5,5	48	4,7	4	5,4	37		
	30		F30BY03234	588723D1	General AG	94	2,7	1,6	7,7	48	4,7	4	5,4	37		
	34		F34BY03235	588726D1	General AG	94	2,7	1,6	7,7	48	4,7	4	5,4	37		
	MT800		6500	18	E18AS02930	581860D1	General AG	100	3,0	2,5	8	52	5,5	4	6,7	44
				25,5	E25AS03180		General AG	100	2,7	1,6	8	52	5,5	4	5,4	42
				27,5	E27AS02997	581862D1	High roading	100	3,0	2,5	8	52	5,5	4	5,4	42
				27,5	E27AS02996	581863D1	General AG	100	2,7	1,6	8	52	5,5	4	5,4	42
				30	E30AS03000	581866D1	High roading	100	3,0	2,5	8	52	5,5	4	5,4	42
		30		E30AS02999	581867D1	General AG	100	2,7	1,6	8	52	5,5	4	5,4	42	
		30		E30AS02932	581865D1	Scraper	100	2,2	2,8	8	52	5,5	4	6,7	44	
		36		E36AS03002	581870D1	High roading	100	3,0	2,5	8	52	5,5	4	5,4	42	
36		E36AS02934		581869D1	Scraper	100	2,2	2,8	8	52	5,5	4	6,7	44		
4500		25,5	F25AS03179		General AG	100	2,7	1,6	8,0	52	4,7	4	5,4	37		
		27,5	F27AS02998	581861D1	General AG	100	2,7	1,6	8,0	52	4,7	4	5,4	37		
		27,5	F27AS02931		General AG - Side slope	100	2,7	1,6	8,0	52	5,5	4	5,4	37		
		30	F30AS03001	581864D1	General AG	100	2,7	1,6	8,0	52	4,7	4	5,4	37		
	30	F30AS02933		General AG - Side slope	100	2,7	1,6	8,0	52	5,5	4	5,4	37			
	36	F36AS03003	581868D1	General AG	100	2,7	1,6	8,0	52	4,7	4	5,4	37			

REPLACEMENT DRIVER, IDLER AND MIDROLLER WHEELS

WHEEL TECHNICAL SPECIFICATIONS

AGCO TRACTOR MODEL	PRODUCT FAMILY	OEM PART NUMBER	COATING TYPE	WIDTH	MODEL/TRACK WIDTH COMPATIBILITY
MT700	Midroller	502930D1	Rubber	Narrow	Does not fit on MT738,740,743
	Idler	504781D1	Rubber	Narrow	All
	Idler	504782D1	Rubber	Medium	All
	Midroller	548349D3	Polyurethane	Medium	Does not fit on MT738,740,743
	Midroller	548350D3	Polyurethane	Wide	Does not fit on MT738,740,743
	Idler	504784D2	Rubber	Wide	All
	Driver (RH)	504787D1	Rubber	Medium	All
	Driver (RH)	504789D1	Rubber	Wide	All
	Driver (LH)	504788D1	Rubber	Medium	All
	Driver (LH)	504790D1	Rubber	Wide	All