


TRAILED TRACK SYSTEMS



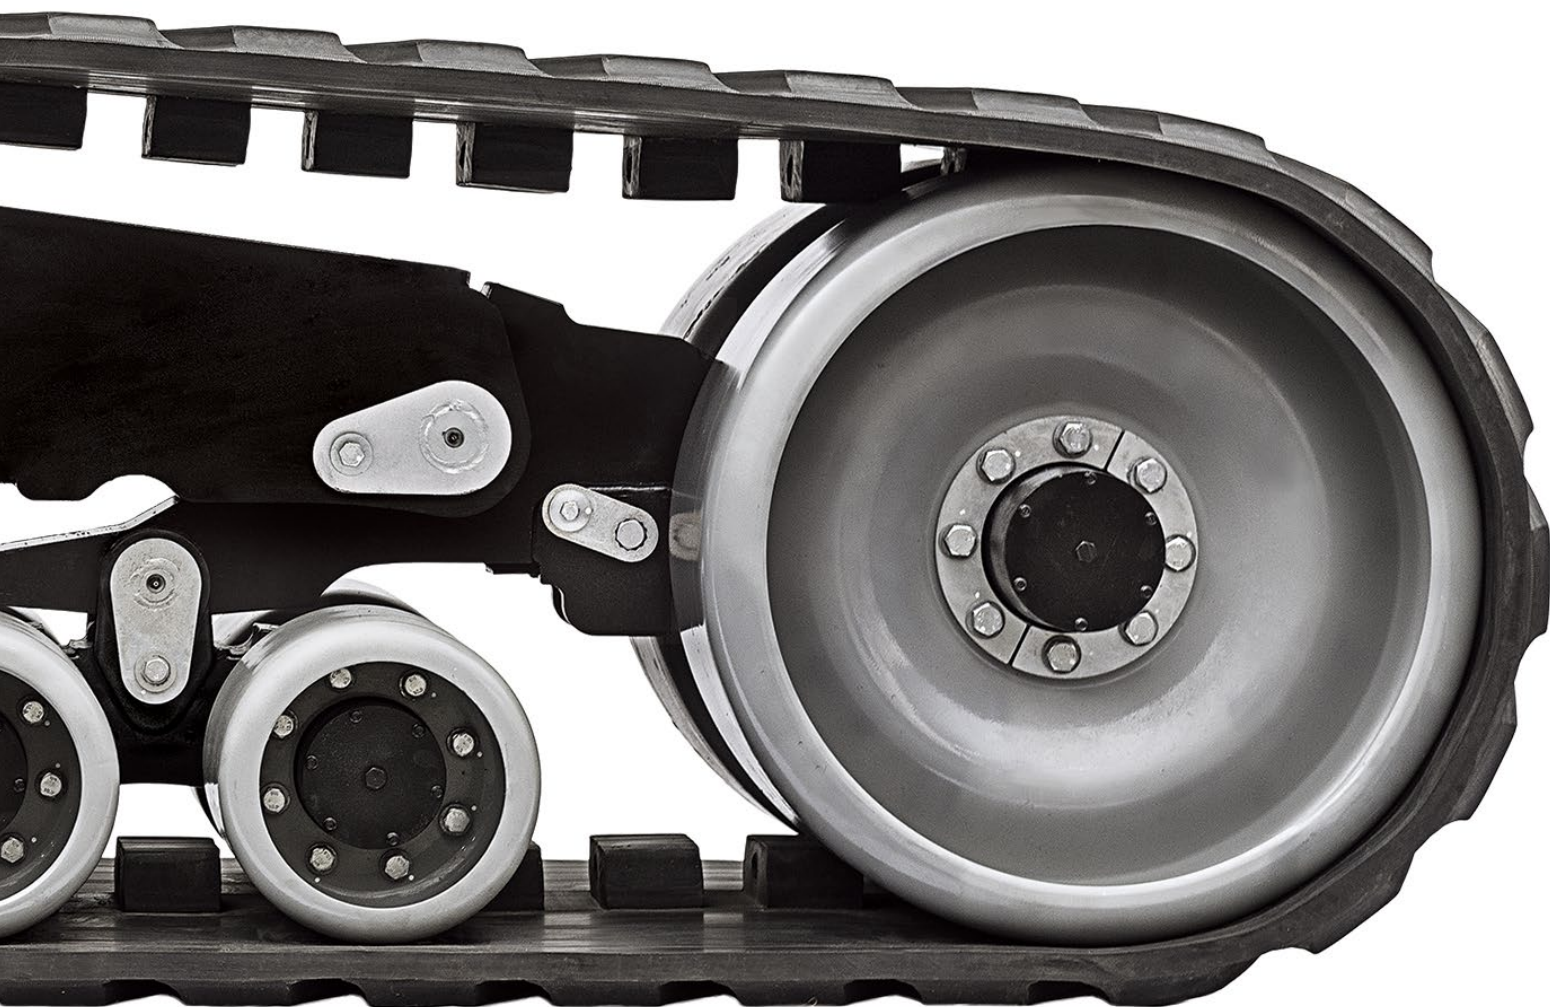

TRAILED TRACK SYSTEMS

The Camso Trailed Track System increases the performance of high-capacity AG application equipment. Its large footprint distributes the weight of heavier, high-capacity carts and toolbars and reduces ground pressure between 30% to 80% compared to tyres.

TRAILED TRACK SYSTEMS


COMPLETE PRODUCT RANGE

Camso offers the broadest range of trailed track systems for your agricultural equipment.

SMALL SERIES TRAILED TRACK SYSTEMS



CAMSO
TTS 30/35/40

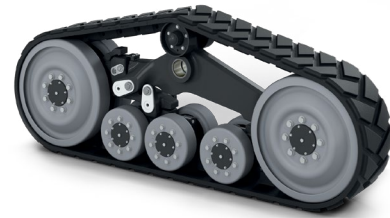

CAMSO
TTS 40/45

LARGE SERIES TRAILED TRACK SYSTEMS









CAMSO
TTS 70



CAMSO
TTS 80/100/110

THE RIGHT TRAILED TRACK SYSTEM FOR YOUR APPLICATION

SMALL SERIES		LARGE SERIES			
<p>CAMSO TTS 30/35/40</p> <p>For fertilizer carts, planters, strip tills and sprayers</p>	<p>CAMSO TTS 40/45</p> <p>For fertilizer carts, planters, strip tills, seed carts and sprayers</p>	<p>CAMSO TTS 70</p> <p>For harvest carts, planters, strip tills and seed carts</p>	<p>CAMSO TTS 80</p> <p>For harvest carts</p>	<p>CAMSO TTS 100</p> <p>For harvest and fertilizer carts</p>	<p>CAMSO TTS 110</p> <p>For harvest carts</p>
DESCRIPTION		DESCRIPTION			
<p>This small-frame series is uniquely designed to provide a large footprint in a small undercarriage package for superior flotation when compared to tyres. The perfect choice for planters, fertilizer carts, and sprayers.</p>		<p>This large-frame series is designed for larger footprints allowing higher weight capacity and low ground pressure performance. Provides low rolling and turning resistance for ease of pulling. The perfect choice for large-capacity planters, fertilizer carts and harvest carts.</p>			
PERFORMANCE		PERFORMANCE			
<p>FLOTATION</p>  <p>RIDE QUALITY</p>  <p>LOW MAINTENANCE</p> 		<p>FLOTATION</p>  <p>RIDE QUALITY</p>  <p>LOW MAINTENANCE</p> 			

FEATURES AND BENEFITS

TRAILED TRACK SYSTEM



1 Main frame
Strong and rigid frame design for increased durability

2 Wheels
Stamped steel construction for increased strength
Heavy-duty wheels hubs with oil bath lubrication to reduce maintenance

3 Track
Designed exclusively for trailed applications for easy pulling to reduce riding or berming on headlands

4 Suspension system
Patented double oscillating bogie wheels that improve ground contact and support on uneven terrain to increase machine stability and product placement

5 Tension system
Mechanical spring track tensioner to ensure proper operation of the system without any additional adjustments or maintenance

6 Alignment system
Swing link design with push/pull adjusters and positive locking feature to support long track life

SPRAYERS



Increases field access when the time is right

- Achieves 10 x more footprint than row crop tyres
- Improves cart stability and boom placement versus wheeled versions

TTS Models	Track Width (mm)	Overall Height (mm)	Overall Length (mm)	Ground Contact - Per Pair (m²)	Capacity - Per Pair (kg)
30-1611	419	904	2052	1.02	13636
40-1512	381	1026	2652	1.40	18182
45-1816	457	1026	2652	1.68	20455

PLANTERS, STRIP TILLS, SEED CARTS



Reduces compaction zones for improved planter performance

- Lowers ground pressure 40 –60% versus tyres
- Increases field mobility and performs with minimal disturbance on headlands
- Impacts fewer rows by replacing 4 tyre contact points with 2-track solution

TTS Models	Track Width (mm)	Overall Height (mm)	Overall Length (mm)	Ground Contact - Per Pair (m²)	Capacity - Per Pair (kg)
30-1611	419	904	2052	1.02	13636
30-1612	419	775	1847	0.90	13636
35-1813	457	775	1847	0.98	15909
35-2011	508	775	1847	1.09	15909
35-2212	559	775	1847	1.20	15909
35-2512	635	775	1847	1.36	15909
40-1512	381	1026	2652	1.40	18182
45-1816	457	1026	2652	1.68	20455
40-2513	635	904	2052	1.54	18182
70-2517	635	907	2619	2.17	31818
70-3012	762	907	2619	2.61	31818
70-3612	915	907	2619	3.13	31818

FERTILIZER CARTS



Improves cart stability and product placement

- Reduces ground pressure up to 60% versus tyres
- Narrow track widths available for row crop applications

TTS Models	Track Width (mm)	Overall Height (mm)	Overall Length (mm)	Ground Contact - Per Pair (m²)	Capacity - Per Pair (kg)
30-1611	419	904	2052	1.02	13636
40-1512	381	1026	2652	1.40	18182
45-1816	457	1026	2652	1.68	20455
100-3614	915	1013	3449	4.65	45455

HARVEST CARTS



Achieves lower compaction on one of the heaviest tools in the field

- Reduces ground pressure by 50 – 85% versus tyres
- Low rolling and turning resistance for ease of pulling

TTS Models	Track Width (mm)	Overall Height (mm)	Overall Length (mm)	Ground Contact - Per Pair (m²)	Capacity - Per Pair (kg)
70-3612	915	907	2619	3.12	31818
80-3014	762	1013	3449	3.88	36364
100-3614	915	1013	3449	4.65	45455
110-3615	915	1013	3734	5.17	45455

Camso provides comprehensive warranty coverage for a period of 12 months from date of purchase for Trailed Track Systems (TTS) against defects in materials and workmanship. Some conditions apply. Refer to the warranty certificate for details. For more info, visit camso.co/agriculture



We are dedicated to supporting farmers in every step of their operations.
For customer service, contact us by email at Agritrack-EU@camso.co

**CONNECT WITH US FOR EXCLUSIVE
ROAD FREE CONTENT**



camso.co

