

CAMSO TLH 532

FORMERLY SOLIDEAL TH2



TELEHANDLERS



HIGH QUALITY FOR STANDARD DUTY

A high quality, reliable tire solution. With enhanced durability and even tread wearing, it's the best choice for light off-road applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO TLH 532



DEEP TREAD PATTERN

- Enhances durability and traction

OPTIMIZED TREAD PATTERN

- Provides good traction in off-road conditions


FLATTER TREAD PROFILE

- Resists tread crowning for even wearing



GRADER	TIRE SIZE	PR	TRA CODE	RIM SIZE		ACTUAL TIRE DIMENSIONS			MAXIMUM TIRE LOAD [kg] [lb] VERSUS INFLATION PRESSURE [bar] [PSI]						
				Recommended	Alternative	O.D [mm] [in]	O.W [mm] [in]	O.T.D [mm] [32nd]	1.25	1.50	1.75	2.00	2.25	2.50	2.75
									18	21	25	29	32	36	39
13.00-24 TG	12	G-3	8.00TG	10.00VA 9.00DC	1303	367	28	1700	1900	2060	2240	2360(10)	2500	2650	
					51.3	14.4	35	3750	4200	4550	4950	5200(10)	5500	5850	
14.00-24 TG	12	G-3	8.00TG	10.00VA 9.00DC	1354	385	30	1700	1900	2060	2240	2360(10)	2500	2650	
					53.3	15.2	38	3750	4200	4550	4950	5200(10)	5500	5850	

LOADER-DOZER	TIRE SIZE	PR	TRA CODE	RIM SIZE		ACTUAL TIRE DIMENSIONS			MAXIMUM TIRE LOAD [kg] [lb] VERSUS INFLATION PRESSURE [bar] [PSI]						
				Recommended	Alternative	O.D [mm] [in]	O.W [mm] [in]	O.T.D [mm] [32nd]	3.25	3.50	3.75	4.00	4.25	4.50	4.75
									46	50	54	57	61	64	68
13.00-24 TG	12	L-3	8.00TG	10.00VA 9.00DC	1303	367	28	4500	4750	5000(10)	5150	5300	5600(12)	5600	
					51.3	14.4	35	9950	10500	11050(10)	11350	11700	12350(12)	12350	
14.00-24 TG	12	L-3	8.00TG	10.00VA 9.00DC	1354	385	30	4500	4750	5000(10)	5150	5300	5600(12)	5600	
					53.3	15.2	38	9950	10500	11050(10)	11350	11700	12350(12)	12350	

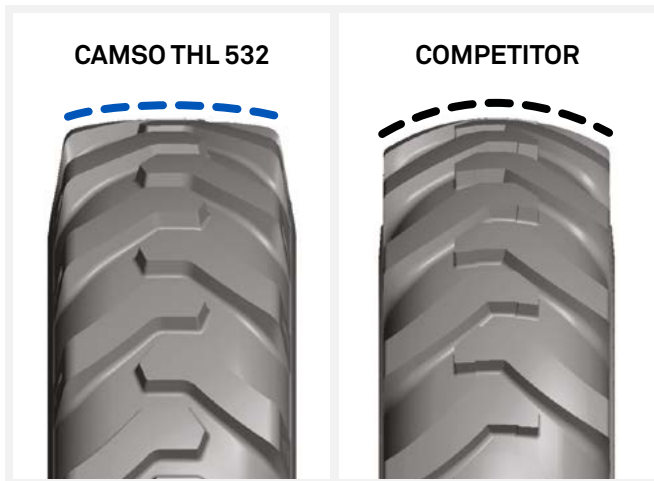

The Camso THL 532 was designed as a high-quality telehandler tire solution suitable for a wide variety of applications. Its flatter tread profile resists crowning when inflated for **improved stability and even tread wear.**

AUTHORIZED DISTRIBUTOR:

camso.co



FORMERLY CAMOPLAST SOLIDEAL