

CAMSO GRD 732



MOTOR
GRADERS



ULTIMATE OFF-ROAD TRACTION AND STABILITY

Excellent solution for tough
off-road applications
delivering superior traction,
durability, and impact resistance
in pneumatic grader tires

camso.co

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



ROAD
FREE
COMPANY

CAMSO GRD 732



VOID GUARD IMPACT PROTECTION

- Enhances tread impact resistance to reduce risk of punctures

WRAPAROUND STEPPED TREAD DESIGN

- Maximizes tread cleanout for best off-road traction



MASSIVE TREAD DEPTH WITH CURVED TREAD LUGS

- Ensures excellent traction on soft surfaces and long wearing durability when operating at higher speeds


IMPACT GUARD WITH ENHANCED RIM PROTECTION

- Provides maximum sidewall and rim flange protection, reducing risks of impact damages and flat tires

TIRE SIZE	PR	RIM SIZE	ACTUAL TIRE DIMENSIONS					LOAD INDEX	SPEED SYMBOL	TRA CODE	SERVICE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]					
		Recommended (Permitted)	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]	S.L.R. [mm] [in]	R.C. [mm] [in]						Static	5 km/h 3 mph	15 km/h 9 mph	30 km/h 19 mph	40 km/h 25 mph	50 km/h 31 mph
16.00-24	16	10.00VA (SDC)	1486	438	33	661	4493	181	A2	L-2	Loader-Dozer	4.25	13200	9400	7200	6350	5800	5200
			58.8	17.2	42	26.0	176.9					62	29100	20700	15900	14000	12800	11500
			1486	438	33	680	4493	163	B	E-2	Earthmover	3.25	-	-	5450	5150	5000	4875
			58.8	17.2	42	26.8	176.9					47	-	-	12000	11400	11000	10700
			1486	438	33	684	4493	160	A8	G-2	Grader	3.25	-	-	-	-	4500	4100
			58.8	17.2	42	26.9	176.9					47	-	-	-	-	9920	9040

All tires listed are tubeless.

Original tread depth (OTD) @ center in mm for 16.00-24

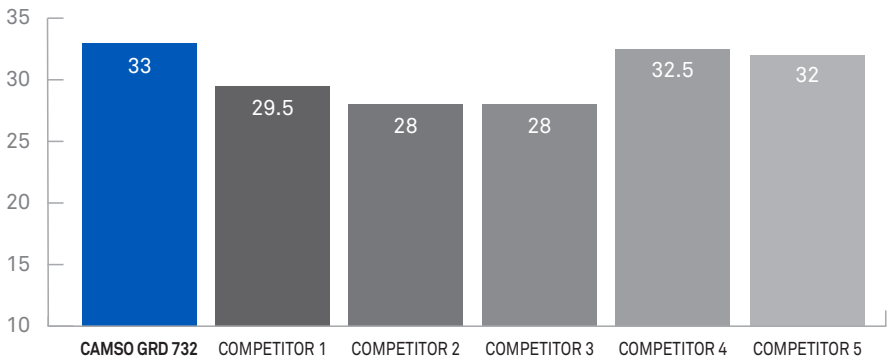

With its premium tread depth and compound the **Camso GRD 732** delivers excellent traction, durability, and impact resistance for demanding motor-grader applications

AUTHORIZED DISTRIBUTOR:

camso.co

