

# CAMSO SKS 532



SKID STEER  
LOADERS



## BEST GENERAL DUTY SOLUTION

A next generation skid steer tire solution for tough, off-road applications. Delivers enhanced durability, traction and side impact resistance for excellent value, performance and low operating costs.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE




TRACTION



# TIRES FOR SKID STEER LOADERS

## CAMSO SKS 532



### EXTRA-DEEP TREAD DEPTH WITH CURVED TREAD LUGS

- Ensures great durability and extra traction

### SELF CLEANING STEPPED TREAD

- Maximizes cleanout for improved off-road traction

### IMPACT GUARD SIDEWALL DESIGN


- Deflects debris to better protect sidewalls and reduce stress cracking

### VOID GUARD TREAD IMPACT PROTECTION

- Protects from tread punctures to minimize flat tires

| TIRE SIZE            | PR | RIM SIZE   | ACTUAL TIRE DIMENSIONS |           |               |          |         | MAXIMUM INFLATION PRESSURE [PSI] | MAXIMUM TIRE LOAD [lb] |       |           |        |
|----------------------|----|--|------------------------|-----------|---------------|----------|---------|----------------------------------|------------------------|-------|-----------|--------|
|                      |    |  | O.D. [in]              | O.W. [in] | O.T.D. [32nd] | SLR [in] | RC [in] |                                  | Static                 | 5 mph | 10 mph    | 20 mph |
| 5.70 - 12 NHS        | 4  | 5JAx12<br>4.50-I-70; 4.50-I-90                                       | 22.3                   | 6.1       | 16            | 10.6     | 67.3    | 60                               | 2290                   | 1450  | 1145      | 985    |
| 23 X 8.50 - 12 SS    | 6  | 7JAx12<br>7.00-I-70; 7.00-I-90                                       | 22.6                   | 8.6       | 16            | 10.5     | 68.3    | 50                               | 2860                   | 1810  | 1430      | 1230   |
| 23 X 8.50 - 12 SS    | 12 | 7.00-I-70; 7.00-I-90; 7JA  | 22.5                   | 8.6       | 16            | 10.5     | 67.9    | 100                              | 4360                   | 2760  | 2180      | 1875   |
| 26 X 12.00 - 12 SS 1 | 10 | 10.5x12; 10.50-I-70;<br>10.50-I-90; 8.50-I-70;<br>8.50-I-90; 8 1/2JA | 25.5                   | 12.0      | 25            | 11.7     | 76.9    | 65                               | 5575                   | 3530  | 2790      | 2400   |
| 27 X 8.50 - 15 NHS   | 8  | 7JAx15   | 26.7                   | 8.7       | 18            | 12.4     | 80.9    | 60                               | 4825                   | 2875  | 2400      | 2040   |
| 31 X 15.50 - 15 NHS  | 8  | 13LBx15  | 31.0                   | 15.6      | 29            | 14.4     | 93.6    | 45                               | 7315                   | 4360  | 3645      | 3090   |
| 10-16.5 NHS          | 10 | 8.25   | 30.2                   | 10.9      | 23            | 14.0     | 91.2    | 75                               | 7440                   | 4710  | 3720      | 3205   |
| 12-16.5 NHS          | 12 | 9.75   | 32.7                   | 13.0      | 24            | 15.1     | 98.9    | 80                               | 9985                   | 6320  | 4995      | 4300   |
| 12-16.5 NHS          | 14 | 9.75   | 32.7                   | 13.1      | 24            | 15.0     | 101.0   | 90                               | 10710                  | 6780  | 5355/6745 | 4610   |
| 14-17.5 NHS          | 14 | 10.50  | 36.4                   | 13.8      | 30            | 16.7     | 109.8   | 80                               | 13495                  | 8540  | 6745      | 5805   |

## PERFORMANCE COMPARISON

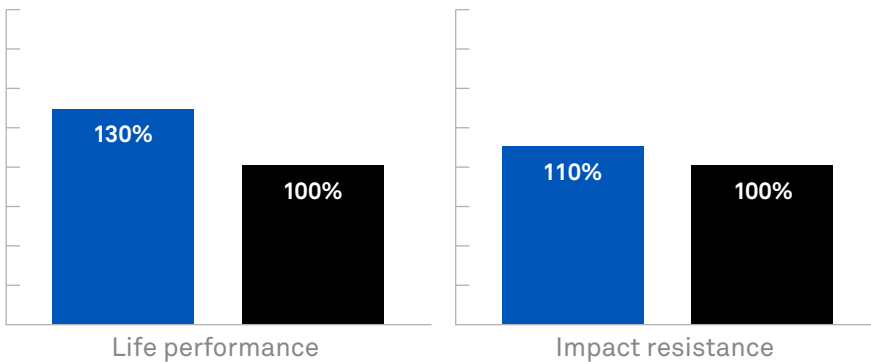

**CAMSO SKS 532**

**XTRA WALL**

With a new premium compound and a tread depth increase, Camso SKS 532 shows 30% better life performance compared to Xtra Wall in controlled conditions.

With high lug to void ratio and the added protection of the new Void Guard feature, SKS 532 demonstrated 10% better tread impact protection.

AUTHORIZED DISTRIBUTOR

