

# CAMSO SKS 796S

FORMERLY SOLIDEAL SOLIDAIR SM



SKID STEER  
LOADERS



## HARD SURFACE SOLID TIRE SOLUTION

A premium solid tire solution for hard-surface operations. Designed with pneumatic comfort in mind, it reduces aperture hole cracking while delivering excellent stability and the best tread life on dry hard-surface operations.

[camso.co](http://camso.co)

## PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



# CAMSO SKS 796S



## FULL-WIDTH FOOTPRINT

- Provides excellent stability and tread life



## FEA-VALIDATED APERTURE DESIGN


- Improves ride quality and reduces cracking

## REUSABLE WHEEL


- Provides lower cost per hour and quicker installation

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS			HEEL		LOAD CAPACITY [kg] [lb]						
							Counterbalanced lift trucks			Other vehicles			Static
		O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]	Normal	Quick	Load wheel		Steering wheel				
							15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	781	237	33	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.3	42	-	■	-	8885	6835	8900	8100	6850	10350
33x12-20 (12-16.5)	7.50	831	287	40	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.3	50	-	■	-	11465	8820	11500	10400	8850	13350
36x14-20 (14-17.5)	7.50	909	326	43	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.8	54	-	■	-	13650	10500	13650	12350	10500	15850

## FEA-ENGINEERED APERTURE DESIGN

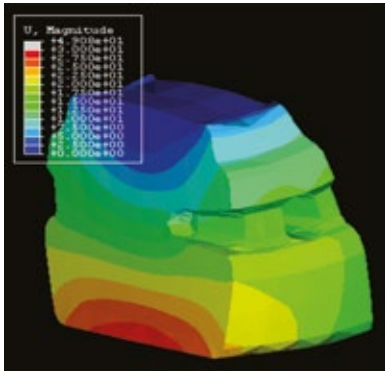

## WEARABLE TREAD VOLUME COMPARISON

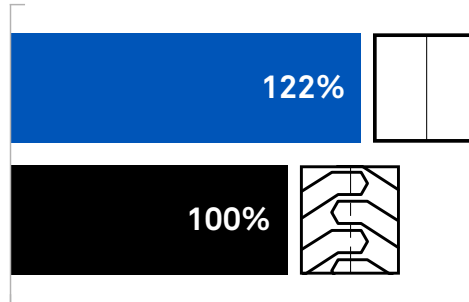

■ CAMSO SKS 796S ■ TYPICAL SOLID R4

Shows minimized stress around aperture holes for vertical deflection.

Camso SKS 796S offers **maximum durability and tread life** in extreme hard surface applications.

AUTHORIZED DISTRIBUTOR:

[camso.co](http://camso.co)



FORMERLY CAMOPLAST SOLIDEAL