

# CAMSO LM L3



WHEEL LOADERS



## MULTI-SURFACE PERFORMANCE

Delivers optimized performance on all surfaces. With enhanced side impact resistance and improved stability, it reduces flats and improves ride quality in all types of applications.

[camso.co](http://camso.co)

## PERFORMANCE

TYRE LIFE




PUNCTURE RESISTANCE



TRACTION



# CAMSO LM L3



## HEAVY-DUTY CARCASS

- Increases side impact resistance and stability

## STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction




## NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO

- Ensures even tread wearing for greater durability

## DEEP AND FLAT TREAD PROFILE

- Reduces tread crowning for improved durability

TYRE SIZE	PR	ACTUAL TYRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TREAD CODE	MAXIMUM TYRE LOAD														
		O.D. [mm]	O.W. [mm]	O.T.D. [mm]				STATIC	5 km/h	10 km/h	15 km/h	20 km/h	25 km/h	30 km/h	35 km/h	40 km/h	45 km/h	50 km/h	55 km/h	60 km/h	65 km/h	
15.5-25	12	1283	415	27	168	A2	L-3	8950	6400	5600	4875	4700	4475	4300	4150	3925	3750	3530	-	-	-	
					149	B	E-3	-	-	-	3650	3575	3500	3450	3375	3350	3325	3250	3150	3000	2700	
					142	A8	G-3	-	-	-	-	-	-	-	-	-	2650	-	2400	-	2175	1925
15.5-25	16	1276	414	27	175	A2	L-3	11000	7850	6900	6000	5800	5500	5300	5100	4825	4625	4350	-	-	-	
					156	B	E-3	-	-	-	4475	4400	4325	4250	4150	4125	4075	4000	3875	3675	3325	
					152	A8	G-3	-	-	-	-	-	-	-	-	-	3550	-	3225	-	2900	2600
17.5-25	12	1390	470	27	171	A2	L-3	9850	7000	6150	5350	5150	4925	4725	4550	4300	4120	3875	-	-	-	
					153	B	E-3	-	-	-	4100	4025	3950	3875	3800	3750	3725	3650	3550	3350	3025	
					145	A8	G-3	-	-	-	-	-	-	-	-	-	2900	-	2650	-	2375	2125
17.5-25	16	1391	460	26	177	A2	L-3	11700	8300	7300	6350	6150	5850	5600	5400	5100	4890	4600	-	-	-	
					158	B	E-3	-	-	-	4750	4675	4600	4500	4425	4375	4325	4250	4125	3900	3525	
					150	A8	G-3	-	-	-	-	-	-	-	-	-	3350	-	3050	-	2750	2450
17.5-25	20	1363	477	28	181	A2	L-3	13200	9400	8250	7200	6950	6600	6350	6100	5800	5550	5200	-	-	-	
					164	B	E-3	-	-	-	5600	5500	5400	5300	5200	5150	5100	5000	4850	4600	4150	
					181	A2	L-3	13200	9400	8250	7200	6950	6600	6350	6100	5800	5530	5200	-	-	-	
20.5-25	16	1503	545	32	167	B	E-3	-	-	-	6100	6000	5900	5800	5650	5600	5550	5450	5300	5000	4525	
					156	A8	G-3	-	-	-	-	-	-	-	-	-	4000	-	3650	-	3275	2925
					186	A2	L-3	15200	10800	9500	8250	8000	7600	7300	7050	6650	6365	5985	-	-	-	
20.5-25	20	1507	546	30	170	B	E-3	-	-	-	6720	6600	6480	6360	6240	6180	6120	6000	5800	5500	4975	
					191	A2	L-3	17400	12400	10900	9500	9150	8700	8400	8050	7650	7305	6865	-	-	-	
					177	B	E-3	-	-	-	8200	8050	7900	7750	7600	7500	7450	7300	7100	6700	6050	
23.5-25	24	1630	630	37	196	A2	L-3	20000	14300	12500	10900	10500	10000	9650	9250	8750	8375	7875	-	-	-	
					180	B	E-3	-	-	-	8950	8800	8650	8500	8300	8250	8150	8000	7750	7350	6650	
					198	A2	L-3	21100	15000	13200	11500	11100	10600	10200	9750	9250	8845	8315	-	-	-	
26.5-25	20	1752	691	40	181	B	E-3	-	-	-	9250	9100	8900	8750	8600	8500	8400	8250	8000	7600	6850	
					203	A2	L-3	24800	17700	15500	13500	13000	12400	11900	11500	10900	10385	9765	-	-	-	
					188	B	E-3	-	-	-	11200	11000	10800	10600	10400	10300	10200	10000	9700	9200	8300	
29.5-25	28	1873	770	36	207	A2	L-3	28000	20000	17500	15200	14700	14000	13500	13000	12300	11725	11025	-	-	-	
					193	B	E-3	-	-	-	12880	12650	12420	12190	11960	11845	11730	11500	11155	10580	9545	

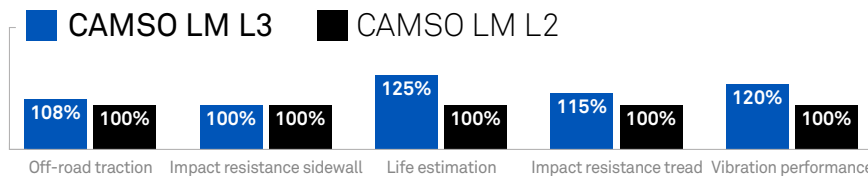

Durability and stability are key issues for loader applications on mixed and hard surfaces. Camso LM L3 enhances tread life and impact resistance with a high lug-to-void ratio and engineered non-directional tread pattern. Additionally, a heavy-duty carcass improves stability.

