

CAMSO LM L3



WHEEL LOADERS



MULTI-SURFACE PERFORMANCE

Delivers optimized performance on all surfaces. With enhanced side impact resistance and improved stability, it reduces flats and improves ride quality in all types of applications.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO LM L3



HEAVY-DUTY CARCASS

- Increases side impact resistance and stability

STEPPED TREAD DESIGN

- Enhances tread cleanout for improved traction




NON-DIRECTIONAL TREAD PATTERN WITH OPTIMIZED LUG-TO-VOID RATIO

- Ensures even tread wearing for greater durability

DEEP AND FLAT TREAD PROFILE

- Reduces tread crowning for improved durability

TIRE SIZE	PR	ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	TREAD CODE	MAXIMUM TIRE LOAD													
		O.D. [inch]	O.W. [inch]	O.T.D. [32nd inch]				STATIC	3 mph	6 mph	9 mph	12.5 mph	16 mph	19 mph	22 mph	25 mph	28 mph	31 mph	34 mph	37 mph	40 mph
15.5-25	12	50,5	16,4	34	168	A2	L-3	19730	14110	12345	10750	10360	9865	9480	9150	8655	8265	7780	-	-	-
					149	B	E-3	-	-	-	8045	7880	7715	7605	7440	7385	7330	7165	6945	6615	5950
					142	A8	G-3	-	-	-	-	-	-	-	-	5840	-	5290	-	4795	4245
15.5-25	16	50,2	16,3	34	175	A2	L-3	24250	17305	15210	13230	12785	12125	11685	11245	10635	10195	9590	-	-	-
					156	B	E-3	-	-	-	9865	9700	9535	9370	9150	9095	8985	8820	8545	8100	7330
					152	A8	G-3	-	-	-	-	-	-	-	-	7825	-	7110	-	6395	5730
17.5-25	12	54,7	18,5	34	171	A2	L-3	21715	15430	13560	11795	11355	10860	10415	10030	9480	9085	8545	-	-	-
					153	B	E-3	-	-	-	9040	8875	8710	8545	8380	8265	8210	8045	7825	7385	6670
					145	A8	G-3	-	-	-	-	-	-	-	-	6398	-	5840	-	5235	4685
17.5-25	16	54,8	18,1	33	177	A2	L-3	25795	18300	16095	14000	13560	12895	12345	11905	11245	10780	10140	-	-	-
					158	B	E-3	-	-	-	10470	10305	10140	9920	9755	9645	9535	9370	9095	8600	7770
					150	A8	G-3	-	-	-	-	-	-	-	-	7385	-	6725	-	6065	5400
17.5-25	20	53,7	18,8	35	181	A2	L-3	29100	20725	18190	15875	15320	14550	14000	13450	12785	12235	11465	-	-	-
					164	B	E-3	-	-	-	12345	12125	11905	11685	11465	11355	11245	11025	10690	10140	9150
20.5-25	16	59,2	21,5	40	181	A2	L-3	29100	20725	18190	15875	15320	14550	14000	13450	12785	12190	11465	-	-	-
					167	B	E-3	-	-	-	13450	13230	13005	12785	12455	12345	12235	12015	11685	11025	9975
					156	A8	G-3	-	-	-	-	-	-	-	-	8820	-	8045	-	7220	6450
20.5-25	20	59,3	21,5	38	186	A2	L-3	33510	23810	20945	18190	17635	16755	16095	15545	14660	14030	13195	-	-	-
					170	B	E-3	-	-	-	14815	14550	14285	14020	13755	13625	13490	13230	12785	12125	10970
23.5-25	20	63,6	24,7	45	191	A2	L-3	38360	27335	24030	20945	20170	19180	18520	17745	16865	16105	15135	-	-	-
					177	B	E-3	-	-	-	18080	17745	17415	17085	16755	16535	16425	16095	15655	14770	13340
23.5-25	24	64,2	24,8	47	196	A2	L-3	44090	31525	27560	24030	23150	22045	21275	20395	19290	18465	17360	-	-	-
					180	B	E-3	-	-	-	19730	19400	19070	18740	18300	18190	17970	17635	17085	16205	14660
26.5-25	20	69,0	27,2	50	198	A2	L-3	46520	33070	29100	25355	24470	23370	22485	21495	20395	19500	18330	-	-	-
					181	B	E-3	-	-	-	20395	20060	19620	19290	18960	18740	18520	18190	17635	16755	15100
26.5-25	28	68,8	27,3	49	203	A2	L-3	54675	39020	34170	29760	28660	27335	26235	25350	24030	22895	21530	-	-	-
					188	B	E-3	-	-	-	24690	24250	23810	23370	22930	22710	22485	22045	21385	20285	18300
29.5-25	28	73,7	30,3	45	207	A2	L-3	61730	44090	38580	33510	32410	30865	29760	28660	27115	25850	24305	-	-	-
					193	B	E-3	-	-	-	28395	27890	27380	26875	26365	26115	25860	25355	24595	23325	21045

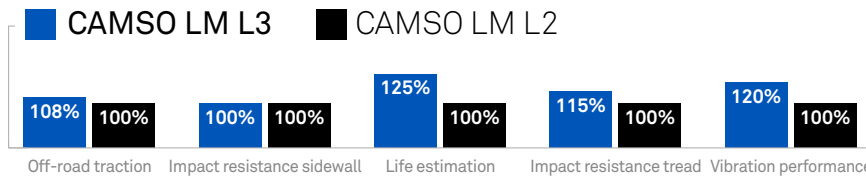

Durability and stability are key issues for loader applications on mixed and hard surfaces. Camso LM L3 enhances tread life and impact resistance with a high lug-to-void ratio and engineered non-directional tread pattern. Additionally, a heavy-duty carcass improves stability.

