

CAMSO BHL 530

FORMERLY SOLIDEAL MR F3



BACKHOE
LOADERS



PERFORMANCE AND QUALITY YOU CAN RELY ON

Delivers reliable performance and quality for tough backhoe applications. Count on this all-purpose steer tire for excellent stability and improved operator comfort on a variety of surfaces.

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO BHL 530



ENGINEERED F3 RIB TREAD DESIGN

- Provides smooth ride and effective steering



ROBUST CARCASS

- Reduces tread crowning for even wearing and excellent stability



DEEP TREAD DEPTH

- Enhances longevity

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS			LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [PSI]	APPLI-CATION	MAXIMUM TIRE LOAD [kg] [lb]		
			Recommended	Alternative	O.D. [mm] [in]	O.W. [mm] [in]	O.T.D. [mm] [32nd]					Static	15 km/h 9 mph	50 km/h 31 mph
11L-15SL	12	TBLS	8LB	10LB	789	284	13	121	B	3.6	-	2900	1670	1450
					31.1	11.2	16			6395		3680	3195	
11L-16SL	12	TBLS	8LB	-	795	270	13	123	B	3.60	-	3100	1785	1550
					31.3	10.6	16			6835		3935	3415	
14L-16.1SL* (replaces 14.5/75-16.1SL)	10	TBLS	W11C	-	940	361	17	121	A8	2.80	-	4720	2715	2360
					37.0	14.2	21			10405		5986	5205	

* Replaces 14.5/75-16.1SL 10 ply to conform to ETRTO specifications.
 14L-16.1SL 14 ply is dimensionally the same and can be mixed with and used in place of earlier 14.5/75-16.1SL branded BHL 530 tires.
 Inflate to recommended air pressure according to machine manufacturer guidelines.

11L16 12PR BHL 530

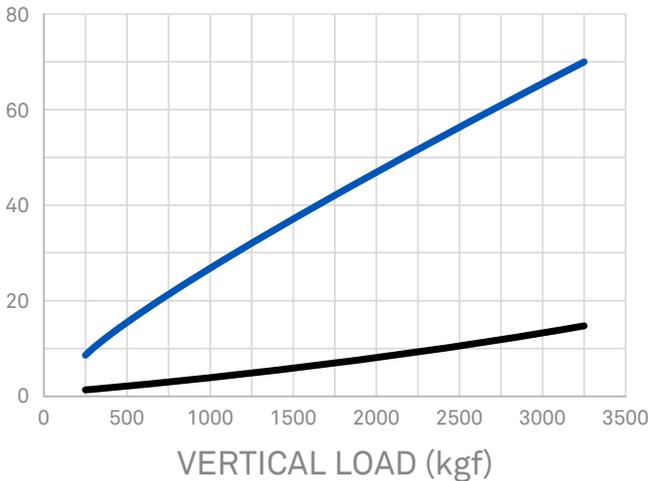

The Camso BHL 530 front backhoe tire features a stronger carcass construction for **improved stability under load** with reduced tread crowning

■ VERTICAL DEFLECTION (mm) ■ HORIZONTAL DEFLECTION (mm)

AUTHORIZED DISTRIBUTOR:

