

CAMSO GRD 732



MOTOR GRADERS



ULTIMATE OFF-ROAD TRACTION AND STABILITY

Excellent solution for tough off-road applications delivering superior traction, durability, and impact resistance in pneumatic grader tires

camso.co

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



CAMSO GRD 732



VOID GUARD IMPACT PROTECTION

- Enhances tread impact resistance to reduce risk of punctures

WRAPAROUND STEPPED TREAD DESIGN

- Maximizes tread cleanout for best off-road traction



MASSIVE TREAD DEPTH WITH CURVED TREAD LUGS

- Ensures excellent traction on soft surfaces and long wearing durability when operating at higher speeds


IMPACT GUARD WITH ENHANCED RIM PROTECTION

- Provides maximum sidewall and rim flange protection, reducing risks of impact damages and flat tires

TIRE SIZE	PR	RIM SIZE RECOMMENDED (PERMITTED)	ACTUAL TIRE DIMENSIONS					LOAD INDEX	SPEED SYMBOL	TREAD CODE	SERVICE	INFLATION PRESSURE [bar] [psi]	MAXIMUM TIRE LOAD [kg] [lb]							
			O.D. [mm] [inch]	O.W. [mm] [inch]	O.T.D. [mm] [32nd inch]	S.L.R. [mm] [inch]	R.C. [mm] [inch]						STATIC	5 km/h [3 mph]	15 km/h [9 mph]	20 km/h [12.5 mph]	30 km/h [19 mph]	40 km/h [25 mph]	50 km/h [31 mph]	65 km/h [40 mph]
13.00-24 TG	16	10 (9.0; 9.00/1.5 (DC))	1298	374	29	604	4077	149	AB	G-2	GRADER	3.75	-	-	-	-	3250	2950	2375	
			51.1	14.7	37	23.8	160.5					54	-	-	-	-	-	7165	6505	5235
14.00-24 TG	16	10.00VA	1367	390	35	631	4258	153	AB	G-2	GRADER	3.75	-	-	-	-	3650	3325	2675	
			53.8	15.4	44	24.8	167.6					54	-	-	-	-	-	8045	7330	5895
16.00-24	16	10.00VA (SDC)	1486	438	33	661	4493	181	A2	L-2	LOADER - DOZER	4.25	13200	9400	7200	6950	6350	5800	5200	-
			58.8	17.2	42	26.0	176.9					62	29100	20725	15875	15320	14000	12785	11465	-
			1486	438	33	680	4493	163	B	E-2	EARTHMOVER	3.25	-	-	5450	5350	5150	5000	4875	4050
			58.8	17.2	42	26.8	176.9					47	-	-	12015	11795	11355	11025	10750	8930
			1486	438	33	684	4493	160	A8	G-2	GRADER	3.25	-	-	-	-	-	4500	4100	3275
			58.8	17.2	42	26.9	176.9					47	-	-	-	-	-	9920	9040	7220

All tires listed are tubeless.

Original tread depth (OTD) @ center in mm for 16.00-24

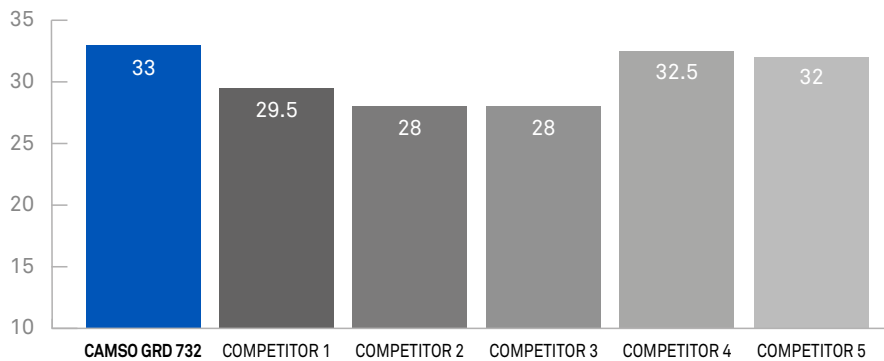

With its premium tread depth and compound the **Camso GRD 732** delivers excellent traction, durability, and impact resistance for demanding motor-grader applications

